

Home Hub Pro with E1 Outdoor Pro

4K PTZ Wi-Fi 6 security system featuring 2TB HDD, pan-tilt auto tracking, spotlight night vision, 3× optical zoom, weekly summary, etc. It's expandable up to 16TB HDD and supports up to 16 Reolink cameras.

- 4K Color Footage with 3× Optical Zoom
- 2TB HDD Included for Local Storage
- Expandable to 16 Reolink Cams
- Anti-Theft Encryption Algorithms



Specifications

| Video & Audio | |
|-----------------------|--|
| Image Sensor | 1/2.8" CMOS Sensor |
| Video Resolution | 3840X2160 (8.0 Megapixels)@20fps |
| Lens | f=2.8-8mm Max: F1.6 |
| Video Compression | H.265 |
| Field of View | <ul style="list-style-type: none"> • Horizontal: 94° ~ 50° • Vertical: 53° ~ 30° |
| Zoom | |
| Color Night Vision | 4pcs/2.7W/6500K/180Lumens |
| Infrared Night Vision | Up to 12 Meters (40ft); LED: 12pcs/1.6W/850nm |
| Frame Rate | |
| Code Rate | |

| | |
|---------------------------|--|
| Audio | Two-Way Audio |
| Power | |
| DC Power | DC 12.0V ²³ 1A, <12W |
| Interface | |
| Power | DC power port |
| Ethernet | One 10M/100Mbps RJ45 |
| SD Card Slot | |
| Reset Button | |
| Audio In/Out | |
| Pan & Tilt | |
| Pan & Tilt Range | Pan: 355°, Tilt: 0°~50° |
| Preset | |
| Power-off Memory Function | |
| Auto Tracking | Support |
| Wi-Fi | |
| Wireless Standard | IEEE 802.11a/ac/ax/ b/g/n |
| Operating Frequency | 2.4 GHz/5 GHz |
| Wireless Security | WPA/WPA2/WPA3 |
| Software Features | |
| Browser Supported | Edge, Chrome, Firefox, Safari |
| OS Supported | PC: Windows, Mac OS; Smartphone: iOS, Android |
| Protocols & Standards | HTTPS, SSL, TCP/IP, UDP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P |
| Maximum User Access | Support up to 12 simultaneous video streams (10 substreams & 2 mainstreams) 20 Users (1 admin account & 19 user accounts); |
| Other Features | |

| | |
|----------------------------|---|
| Smart Alarm | |
| Recording Modes | |
| Time Lapse | |
| Smart Home Compatibility | |
| Working Environment | |
| Temperature | Operating Temperature: -10°C~+50°C (14°F~122°F) |
| Humidity | Operating Humidity: 10% ~ 90% |
| Weatherproof | IP64 |
| Size & Weight | |
| Dimensions | Φ85x118mm |
| Weight | 415g |
| Warranty | |
| Limited Warranty | 2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ |


Gallery & Specs




1. Daylight Sensor
2. Spotlight
3. Lens
4. IR LEDs
5. Status LEDs



1. microSD Card Slot
2. Power
3. Network
4. Power Cord
5. Speaker

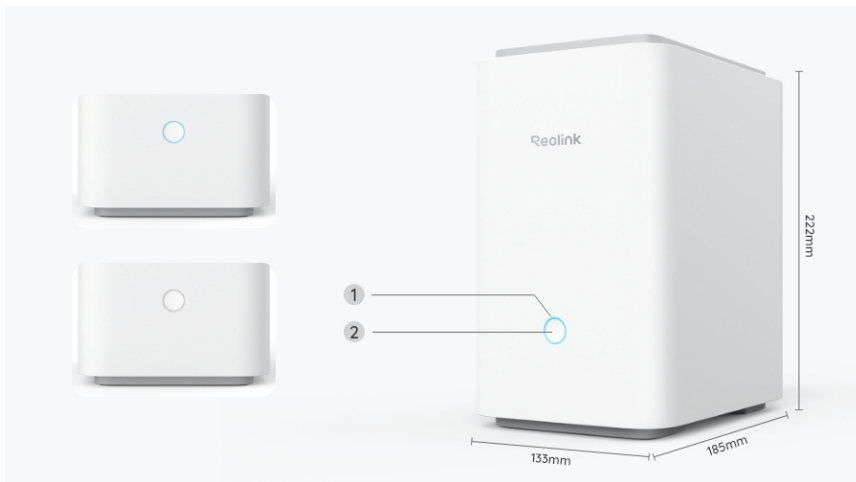

1. Indicator LED
2. Power Button

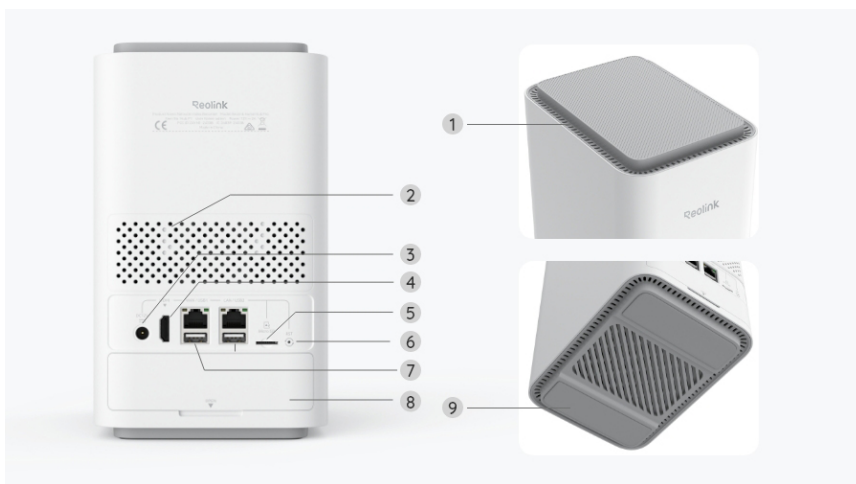

1. Ventilation Holes
2. Speaker
3. DC Input Port
4. HDMI Port
5. microSD Card Slot
6. Reset Button
7. USB Port
8. Hard Drive Bay
9. Silicone Pads