

Home Hub with E1 Outdoor

5MP Wi-Fi Security System with PTZ Wired Cameras

- 360° coverage with auto-tracking
- 24/7 Recording
- Anti-Theft Algorithms & Privacy Protection
- Supports up to 8 Reolink cameras



Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS Sensor
Video Resolution	Default: 2560 x 1920 (5.0 megapixels) at 20 frames/sec
Lens	f=2.8 - 8mm F=1.6, with IR cut
Video Compression	H.264
Field of View	<ul style="list-style-type: none"> • Horizontal: 48° - 90° • Vertical: 37° - 68°
Zoom Mode	3X optical zoom
Color Night Vision	Spotlights: 4pcs/2.7W/6500K
Infrared Night Vision	Up to 12 meters (40ft) (LED: 12pcs/14mil/850nm)
Frame Rate	
Code Rate	


Audio	Two-Way Audio
Power Requirements	
DC Power	DC 12.0V ²³ 1A, <12W
Interface	
Power	DC power port
Ethernet	One 10M/100Mbps RJ45
microSD Card Slot	
Reset Button	
Audio In/Out	
Software Features	
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	
Maximal User Access	HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, P2P, FTP
Other Features	
Smart Alarm	
Recording Modes	
Time Lapse	
Smart Home Compatibility	
Pan & Tilt	
PT Angle(Max.)	Pan: 355°, Tilt: 50°
Preset	
Power-off Memory Function	
Auto Tracking	YES
Wi-Fi	
Wireless Standard	IEEE 802.11a/b/g/n

Operating Frequency	2.4GHz/5GHz
Wireless Security	WPA-PSK/WPA2-PSK
Working Environment	
Temperature	Operating temperature: -10°C~+55°C (14°F~131°F)
Humidity	Operating humidity: 20% ~ 85%
Weatherproof	√
Size & Weight	
Dimensions	Φ85×118mm
Weight	380g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us .

Gallery & Specs



1. Button
2. Indicator Light
3. Vent

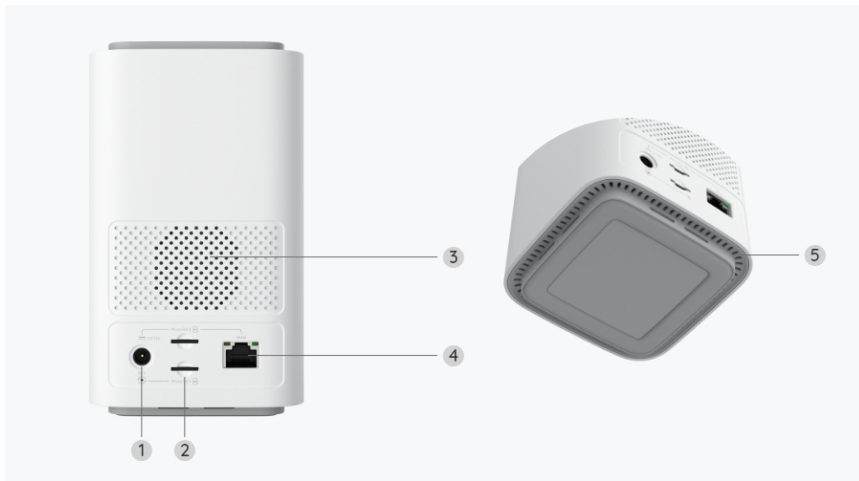

1. DC Input Port
2. microSD Card Slot
3. Speaker
4. LAN Port
5. Vent



1. Daylight Sensor
2. Spotlights
3. Lens
4. IR LEDs
5. Status LED



1. microSD Card Slot
2. Power
3. Network
4. Power Cable
5. Speaker