

## Home Hub with E1 Zoom

**5MP PTZ Wi-Fi surveillance system, pan-tilt & auto-tracking, 3× optical zoom, weekly insights, etc. Supports up to 8 Reolink cameras and two microSD cards of up to 512GB each.**

- 360° Coverage with Auto Tracking
- 5MP Super HD with 3× Optical Zoom
- Up to 8 Reolink Cameras Supported
- Encrypted Storage Without Monthly Fees



## Specifications

Hardware Features	
Image Sensor	1/2.7" CMOS Sensor
Display Resolution	2560x1920 (5 Megapixels)
Lens	f=2.8-8mm Autofocus, F=1.6, with IR Cut
Optical Zoom	3X
Angle of View	<ul style="list-style-type: none"> <li>• Horizontal: 48° - 98°</li> <li>• Vertical: 37° - 75°</li> </ul>
Pan/Tilt Angle	<ul style="list-style-type: none"> <li>• Horizontal: 355°</li> <li>• Vertical: 50°</li> </ul>
Auto Tracking	Available
Minimum Illumination	0 Lux (with IR Illuminator)
IR Distance	12m (40ft) (LED: 10pcs/14mil/850nm)
Dimension	Φ80x111mm

Weight	250g
Power Input	DC 5.0V/2A
Interface	<ul style="list-style-type: none"> <li>• Power</li> <li>• microSD card Slot (Max. 512GB)</li> <li>• Built-in Microphone and Speaker</li> <li>• Reset Button</li> </ul>
<b>Software Features</b>	
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Image Compression	H.264
Maximal Frame Rate	20fps
Code Rate	1024Kbps ~ 4096Kbps (Default: 4096Kbps)
Audio	Two-Way Audio
Maximal User Access	20 Users (1 admin account & 19 user accounts); Support up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
Browser Supported	Edge, Chrome, Firefox, Safari
Smart Alarm	Motion Detection/Person Detection/Pet Detection
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Record Mode	Motion Recording; Scheduled Recording; 24/7 Recording
Alarm	Siren (customizable)
Works with	Google Assistant; Reolink Cloud (available in some countries)
<b>Wireless Features</b>	
Wireless Standard	IEEE 802.11a/b/g/n
Operating Frequency	2.4/5 GHz
Wireless Security	WPA-PSK/WPA2-PSK


## Other Parameters

Temperature	<ul style="list-style-type: none"><li>• Operating Temperature: -10°C~+55°C</li><li>• Storage Temperature: -40°C~70°C</li></ul>
Humidity	<ul style="list-style-type: none"><li>• Operating Humidity: 20% ~ 85%</li><li>• Storage Humidity: 10% ~ 90%</li></ul>
Waterproof	No
<b>Warranty</b>	
Limited Warranty	2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a>

## Gallery & Specs




1. Button
2. Indicator Light
3. Vent

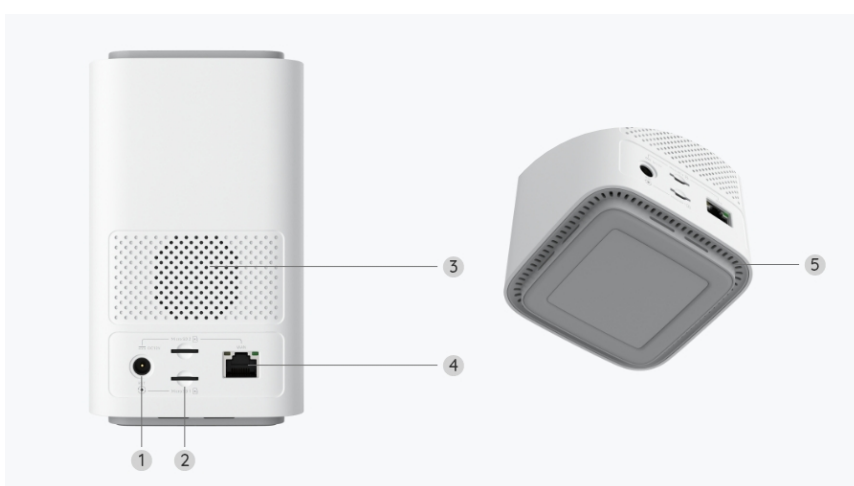

1. DC Input Port
2. microSD Card Slot
3. Speaker
4. LAN Port
5. Vent



- 1. Daylight Sensor
- 2. 10 IR LEDs
- 3. Lens
- 4. Status LED
- 5. Built-In Mic
- 6. Reset Button
- 7. Micro SD Card Slot

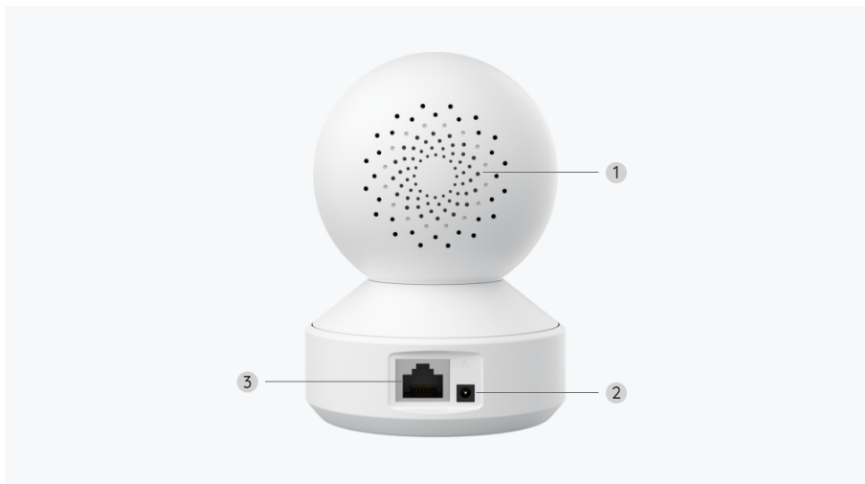

- 1. Speaker
- 2. Power
- 3. Ethernet