

## PRODUCT ID: 48568

### Outdoor Blank-out LED Direct-view Sign

#### MODEL

S-TCL1442GRG-M439/120-277VAC



#### DIMENSIONS

14" H x 42" W x 2.5" D (est. 14.673 lbs)

#### CLASS

**CLASS:** TCL Series Smart Sign

**Control Method:** Sign Control Software

**Communications (by others):** Ethernet connection and static IP lease required  
**Control:** DHCP enabled network and server grade computer running Windows 7 or Windows Server 2008 or higher

#### CONSTRUCTION

**Back Construction:** 0.050" Lift-n-Shift Back

**Cabinet:** 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

**Face Material:** 1/8" impact resistant, smoke-tinted polycarbonate (5109)

**Faces:** Single Faced Sign

**Finish:** Duranodic Bronze

**Mounting Channel:** None

#### ELECTRICAL

**Flashing:** Not Included

**Input Voltage:** 120-277 VAC

**Photodimming:** Installed

**UL/cUL Listed:** Listed for wet locations

#### MESSAGE

**Illumination:** Super bright direct view LEDs. Message blanks out when off.


**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
PERSONAL TELLER	Green Wide Angle LED	3.5"	0.209-0.091
CLOSED	Red Wide Angle LED	3.5"	0.043-0.018
ATM PLUS	Green Wide Angle LED	3.5"	0.127-0.055

NOTE: Above messages are independently controlled.

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

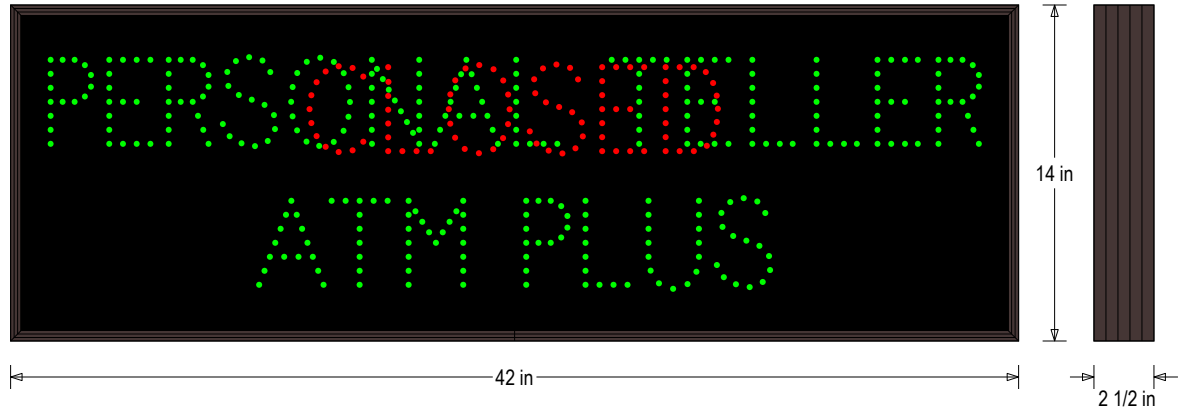

### Sample Display Options



### Frame Detail

