

PRODUCT ID: 51879

Outdoor Blank-out LED Backlit Sign

MODEL

PHX718GR-225/12-24VDC



DIMENSIONS

7" H x 18" W x 2.5" D (est. 4.067 lbs)

CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

ELECTRICAL

Flashing: Not Included

Input Voltage: 12-24 VDC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Black opaque

Font: Other: (None)

Illumination: Backlit with high intensity LEDs. Message blanks out when off


Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Green Indicator Dot	Green Wide Angle LED	4.125"	0.867-0.433
Red Indicator Dot	Red Wide Angle LED	4.125"	0.573-0.287



NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

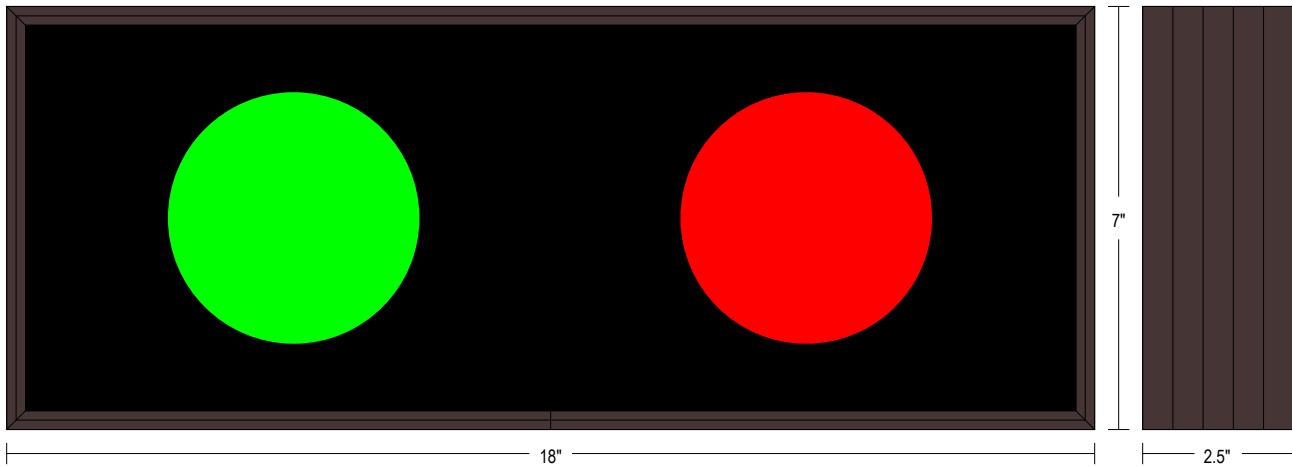

Sample Display Options

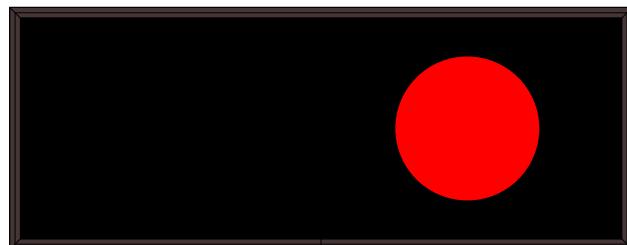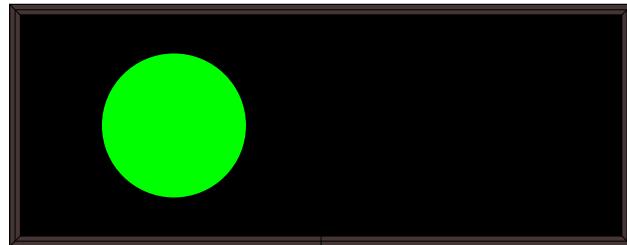

Frame Detail

