

PRODUCT ID: 53344

Outdoor Blank-out LED Backlit Sign

MODEL

PHX1460GGR-N509/12-24VDC



DIMENSIONS

14" H x 60" W x 5.5" D (est. 44.484 lbs)

CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.125" Aluminum sheet

Cabinet: Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. Moisture absorbent interior coating.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

ELECTRICAL

Flashing: Not Included

Input Voltage: 12-24 VDC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Black opaque

Font: Swiss 721 Bold Condensed BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off


Sign Messages: See message table below

Product View


NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.



Sample Display Options

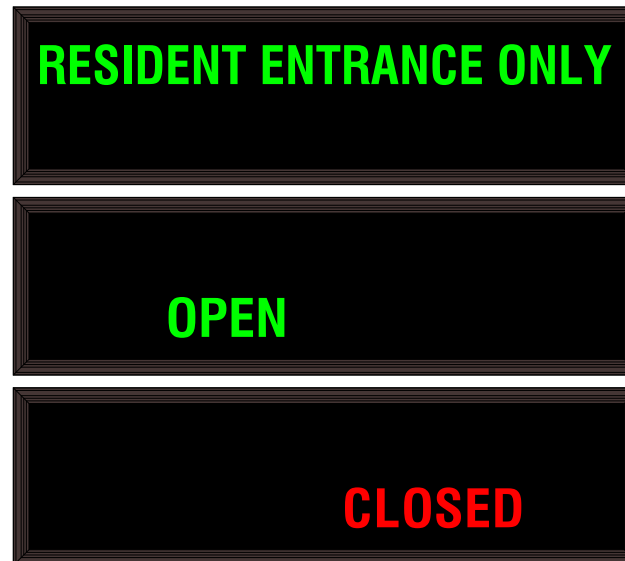

Frame Detail



MESSAGE	LED/COLOR	HEIGHT	AMPS
RESIDENT ENTRANCE ONLY	Green Wide Angle LED	3.75"	7.147-3.573
OPEN	Green Wide Angle LED	3.75"	3.680-1.840
CLOSED	Red Wide Angle LED	3.75"	2.453-1.227

NOTE: Above messages are independently controlled.