

PRODUCT ID: 53364

Outdoor Blank-out LED Backlit Sign

MODEL

PHX1260RGR-N517/120-277VAC



DIMENSIONS

12" H x 60" W x 5.5" D (est. 43.512 lbs)

CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.125" Aluminum sheet

Cabinet: Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. Moisture absorbent interior coating.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Black opaque

Font: Swiss 721 Bold Condensed BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off


Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Circle X Symbols	Red Wide Angle LED	5.0"	0.232-0.101
ENTRY	Green Wide Angle LED	5.0"	0.368-0.159
EXIT	Red Wide Angle LED	5.0"	0.304-0.132


NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

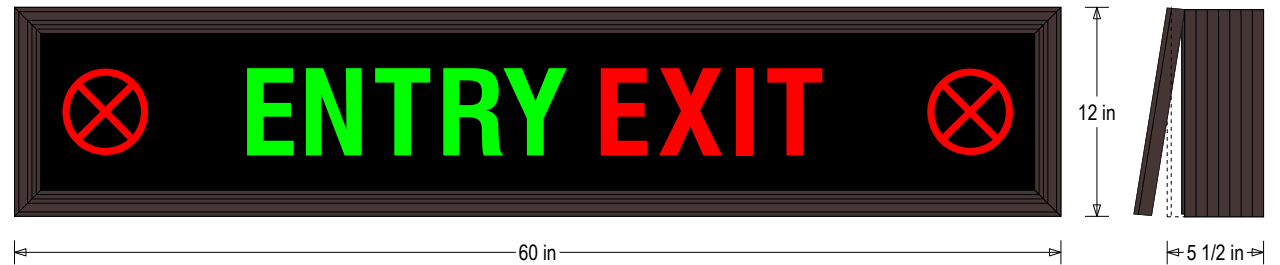

Sample Display Options

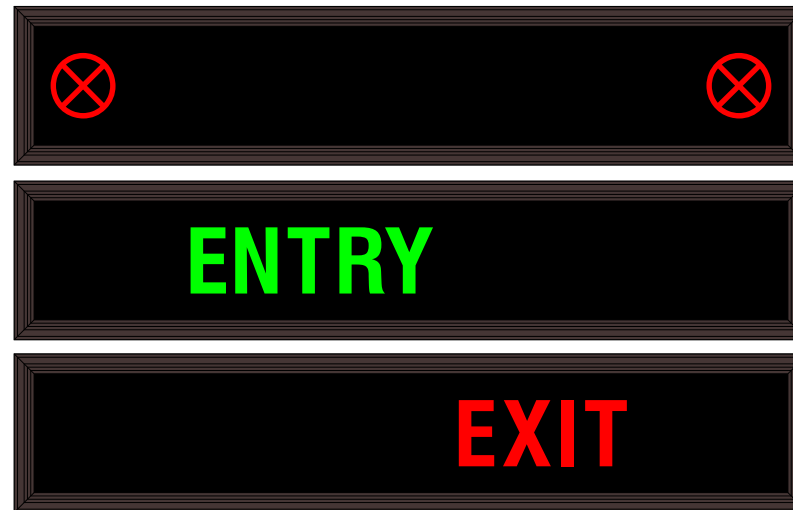

Frame Detail

