

PRODUCT ID: 6286

Outdoor Blank-out LED Direct-view Sign

MODEL
TCL77G-224H/120-277VAC



DIMENSIONS
7" H x 7" W x 2.5" D (est. 3.383 lbs)

CLASS
CLASS: TCL Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.050" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.
Face Material: Injection molded, impact resistant Lexan hood with Lexan lenses
Faces: Single Faced Sign
Finish: Duranodic Bronze
Mounting Channel: None

ELECTRICAL
Flashing: Factory setting 55fpm.
Input Voltage: 120-277 VAC
Photodimming: None
UL/cUL Listed: Listed for wet locations


MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|--------------------------------|----------------------|--------|-------------|
| Green Indicator Dot | Green Wide Angle LED | 4.0" | 0.053-0.023 |
| Green Indicator Dot (Flashing) | Green Wide Angle LED | 4.0" | 0.053-0.023 |

NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

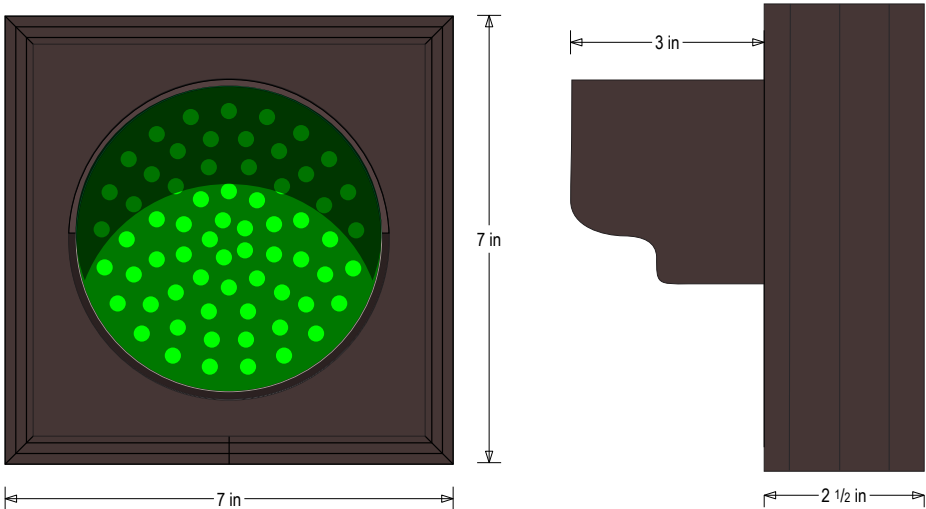

Frame Detail

