



MSV Dimensions




MODEL: MSV86522-XX

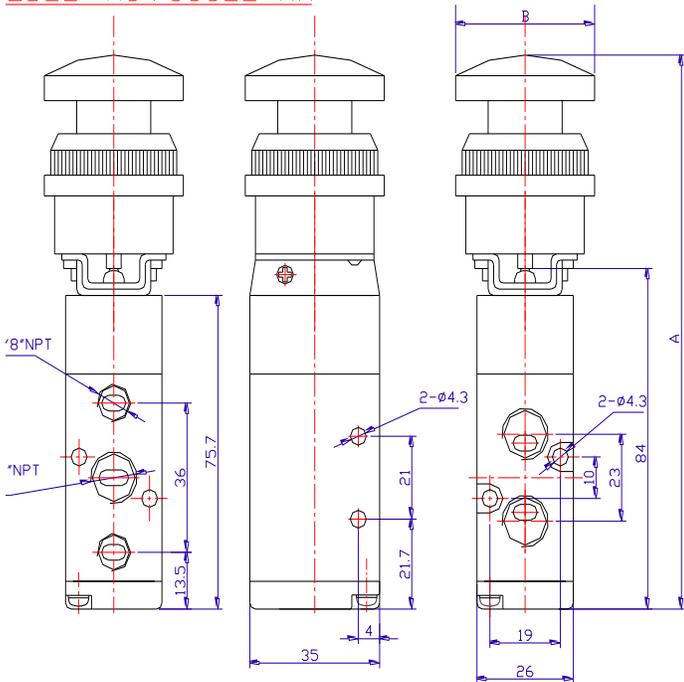

MODEL: MSV98322-XX

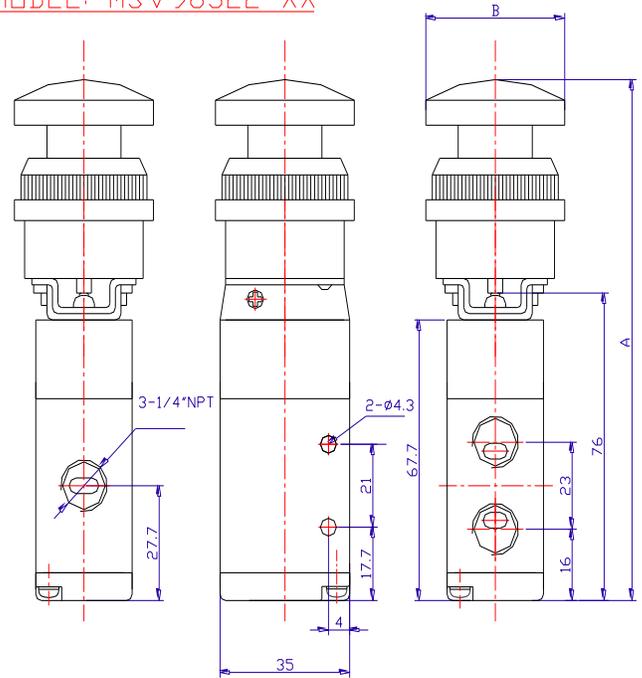

BUTTON STYLE

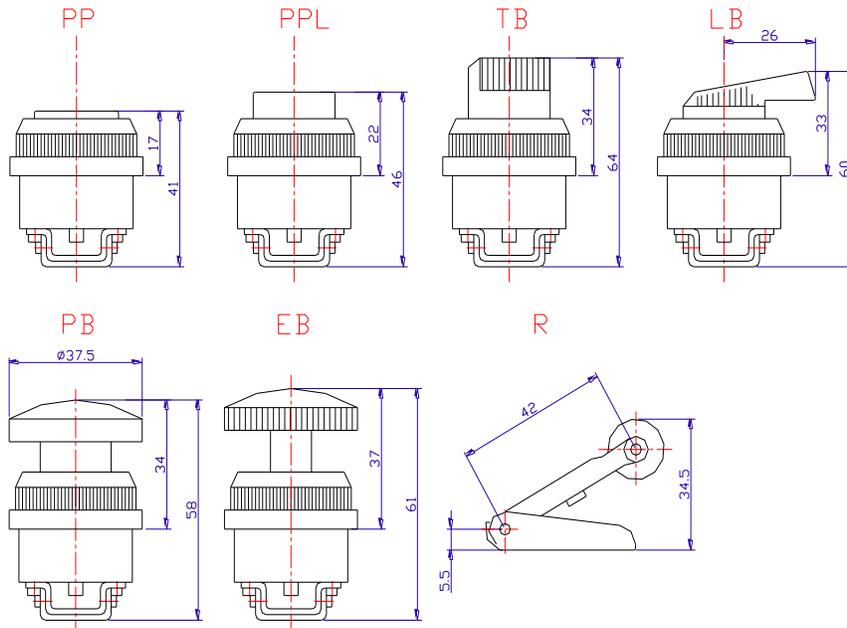

PANEL MOUNT HOLE SIZE 1 3/16" (30 MM)

Specifications		
Model	MPV	MSV
Description	Hand Valves	Hand Valves
Cv	1.00	0.89
Operating Pressure	0 to 115 PSI	
Operating Temperature	23 to 140 Deg. F (-5 to 60 Deg. C)	
Action	Direct Acting	
Working Medium	40 micron filtered air or inert gas	
Body Material	Aluminum	
Seal Material	NBR	
Lubrication	Not Required	
Valve Configuration		Functions
2 way valve configurations: 2 position valves		to turn on and off
3 way valve configurations: 2 position valves		to fully extend single acting cylinder
4 way valve configurations: 2 position valves		to fully extend and retract double acting cylinder
4 way valve configurations: 3 position, closed-center valves		to stop a double acting cylinder in partial stroke
4 way valve configurations: 3 position, exhaust-center valves		to have both cylinder ports open to exhaust such that the cylinder can be extended and retracted to facilitate set-up
4 way valve configurations: 3 position, pressure-center valves		to stop a double acting cylinder in partial stroke with pressure on both ends of the cylinder.