

B-11S T

BRIDGING TRANS MODULE



The B-11S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has a transformer balanced line input with removable terminal block connector, and mute-receive function.

Key features


- For balanced or unbalanced line level sources such as mixer outputs, signal processors and wireless microphone receivers
- Transformer isolation (10kΩ)
- Responds to mute bus activation via mute send module or switch-closure
- Connector: removable terminal block

Specifications

* 0 dB=1 V

Current Consumption	5 mA
Input Sensitivity	-16 dB* (Rated output: -20 dB*)
Input Impedance	10 kΩ, balanced transformer-isolated
Frequency Response	20 Hz - 20 kHz ±1.5 dB
Signal Muting Level	60 dB* (at 1 kHz)
Connector	Removable terminal block (3P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 80 g (0.18 lb)

Dimensions

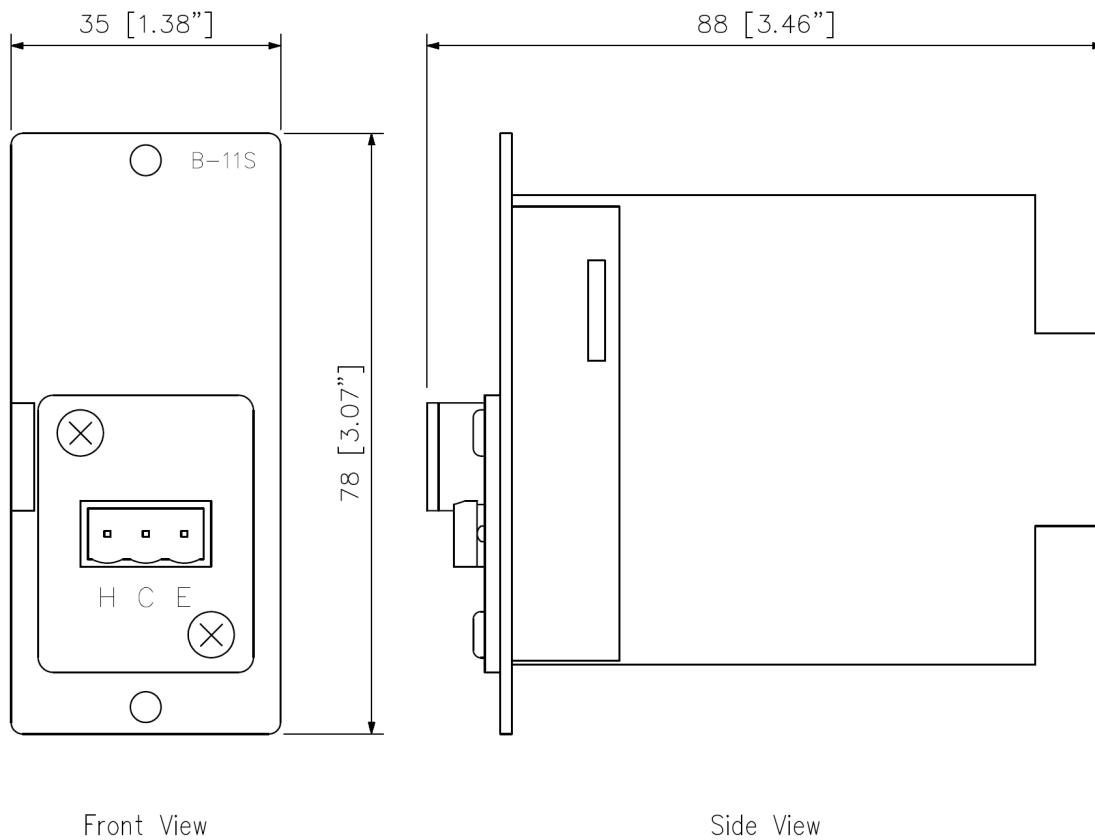

UNIT:mm