

BS-1034

WALL MOUNT SPEAKER



The BS-1034 is a wall mount speaker that can be installed easily on the wall with help of the plug-in speaker receptacle.


Key features

- 2-way speaker
- Easy and quick installation
- Attractive design based on the golden ratio
- Input impedance selector with rotary switch
- Fire resistant according to UL 94-V0

Specifications

Rated Input	10 W
Rated Impedance	100 V line: 1 k Ω (10 W), 2 k Ω (5 W), 3.3 k Ω (3 W), 10 k Ω (1 W) 70 V line: 500 Ω (10 W), 1 k Ω (5 W), 2 k Ω (2.5 W), 3.3 k Ω (1.5 W), 10 k Ω (0.5 W)
Sensitivity	90 dB (1 W, 1 m)
Frequency Response	120 Hz - 20 kHz
Speaker Component	Low frequency: 12 cm (5") cone-type
Input Terminal	M4 screw terminal, distance between barriers: 11 mm (0.43")
Finish	Enclosure: HIPS resin (fire resistant grade UL94 V-0 or its equivalent), off-white (RAL 9010 or equivalent color) Net: Steel plate, off-white (RAL 9010 or equivalent color), paint
Dimensions	208 (W) x 327 (H) x 79 (D) mm (8.19 x 12.87" x 3.11")
Weight	1.4 kg (3.09 lb)
Included Accessories	Speaker receptacle ...1, Wall mounting screw ...2

Dimensions

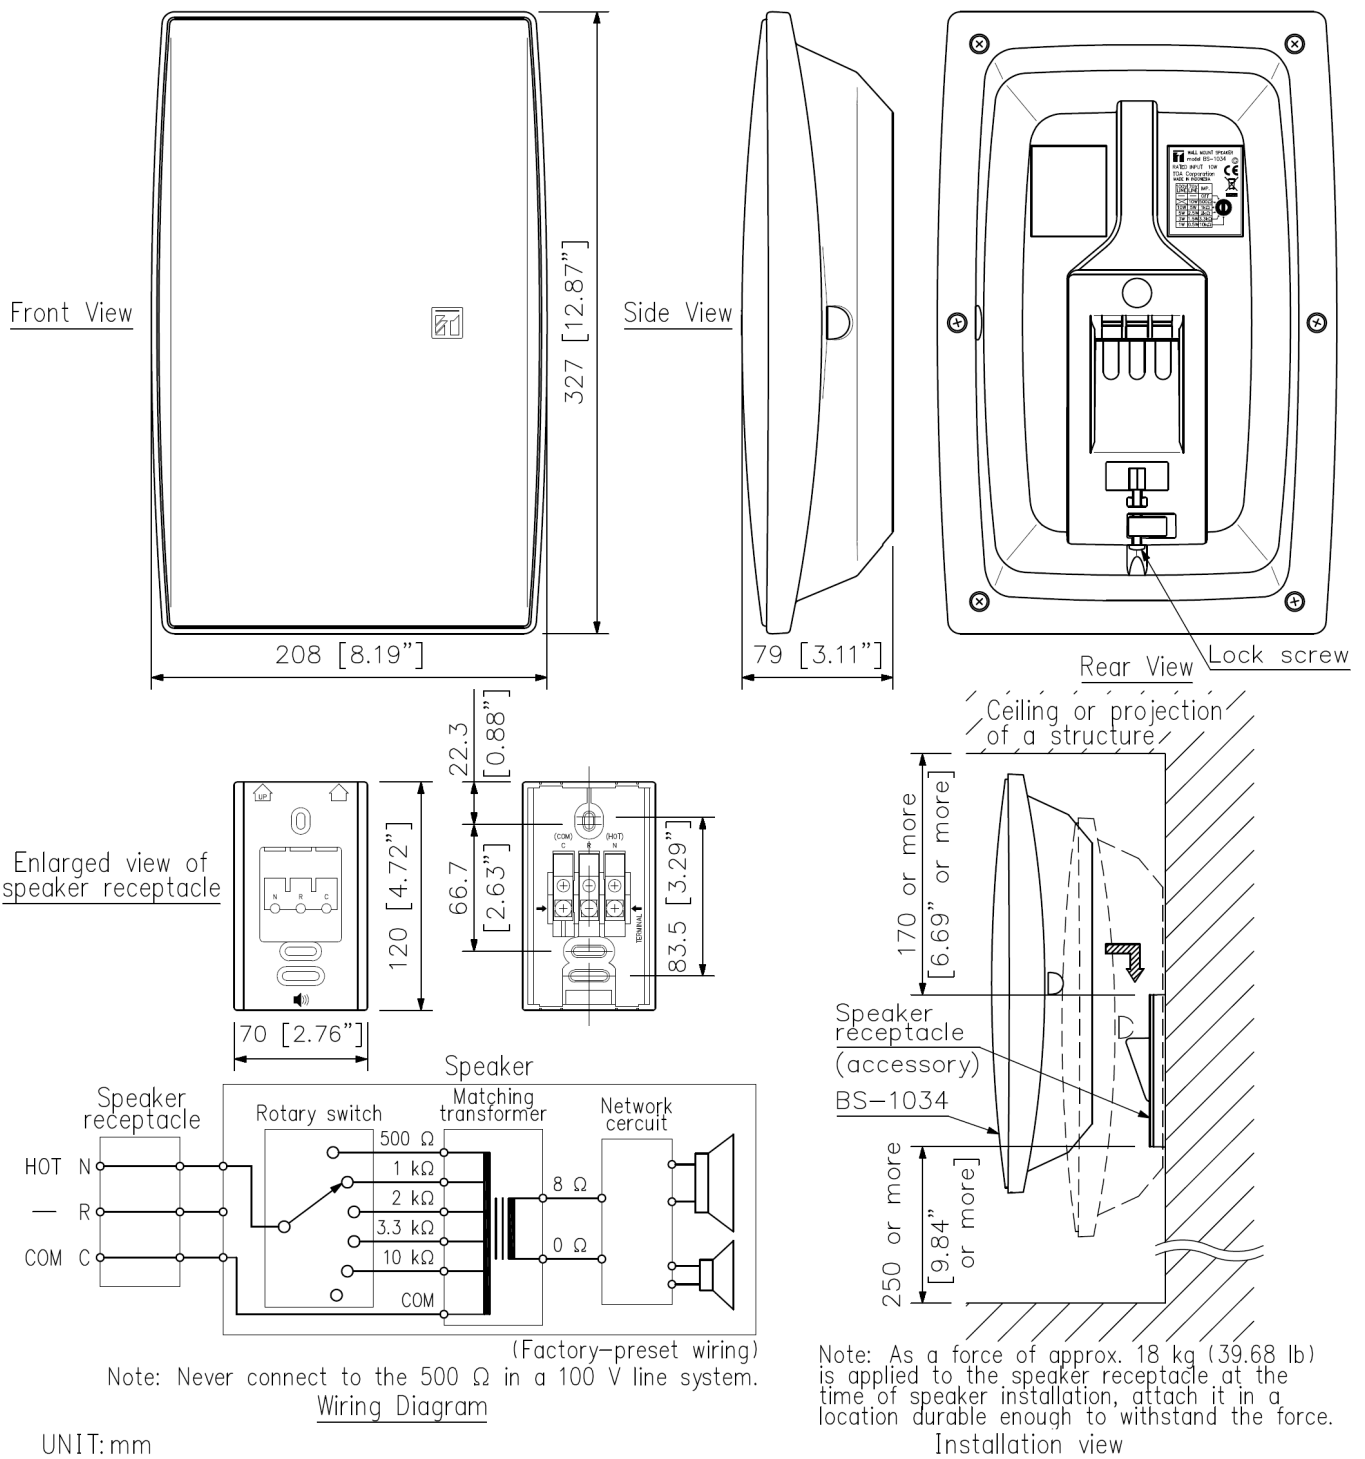

A&E specifications

The speaker unit shall combine a 5" (12cm) cone type low frequency speaker with a balanced dome-type high frequency speaker. The unit shall be capable of wall mounting with a supplied plug-in speaker receptacle accessory. The input connector shall be an M4 screw terminal, with an 11 mm distance between barriers.

The speaker impedance shall be 1kohm (10W), 2kohm (5W), 3.3kohm (3W) or 10kohm (1W) for a 100V line, and 500ohm (10W), 1kohm (5W), 2kohm (2.5W), 3.3kohm (1.5W) or 10kohm (0.5W) for a 70V line. The output sound pressure level at a distance of 1m with a 1W input level applied shall be 90 dB SPL. The speaker shall have a frequency response of 120 – 20,000Hz (-20dB). The speaker enclosure shall be constructed of fire resistant HIPS resin. The grille shall be constructed of surface-treated steel plate net. The speaker shall be available in off-white color. The unit shall have dimensions of 210 (W) x 330 (H) x 80 (D) mm (8.27" x 12.99" x 3.15"), and a weight of 1.4 kg (3.09 lbs.).

The speaker shall be a TOA model BS-1034.