


## D-921E

### MIC/LINE INPUT MODULE

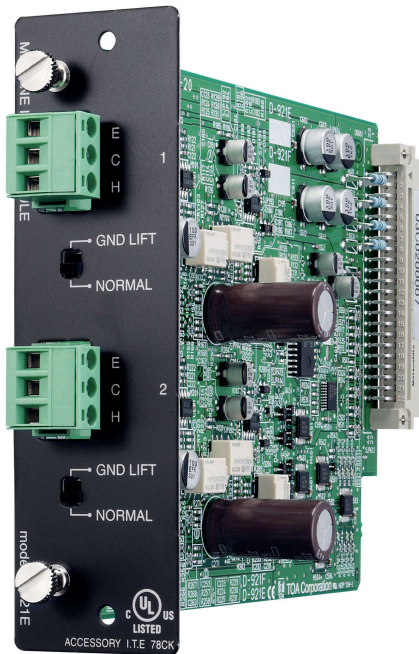

The D-921E is a 2-channel microphone/line input module designed for use with the D-901 Digital Mixer, etc. It is equipped with removable terminal block type connectors. Input sensitivity and phantom power setting can be performed at the main frame such as the D-901.

### Key features


- 2-channel microphone/line input module
- Equipped with removable terminal block type connectors

## Specifications

\* 0 dB = 0.775 V

Input	<p>2 channels, Mic/Line changeable</p> <p>Mic: -50/-36 dB*, 4.7 k<math>\Omega</math>, electronically-balanced, removable terminal block (3 pins)</p> <p>Line: -10/+4 dB*, 10 k<math>\Omega</math>, electronically-balanced, removable terminal block (3 pins)</p> <p>Phantom power supply (can be used when set for the microphone)</p> <p>15 V: D-901 (option), DP-K1 (option), D-2008SP (option)</p> <p>12 V: SX-2100AI (option)</p> <p>Ground lift switch</p>
A/D Converter	24 bit
Sampling Frequency	48 kHz
Frequency Response	20 Hz - 20 kHz, $\pm 1$ dB (+4 dB* input)
Dynamic Range	100 dB (IHF-A weighted) or more (+4 dB* input)
Total Harmonic Distortion	0.05 % or less (+4 dB* input)
Finish	Panel: Pre-coated steel plate, black, 30 % gloss
Dimensions	35 (W) x 119.5 (H) x 178.4 (D) mm
Weight	140 g
Included Accessories	Removable terminal plug (3 pins, preinstalled on the unit) ...2


# Dimensions

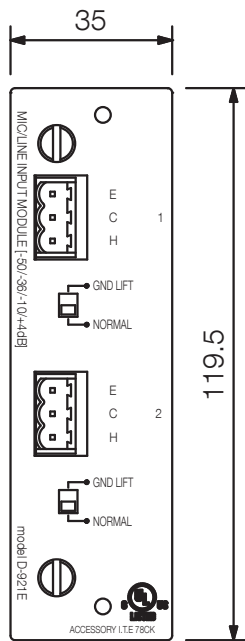

Front View



Top View

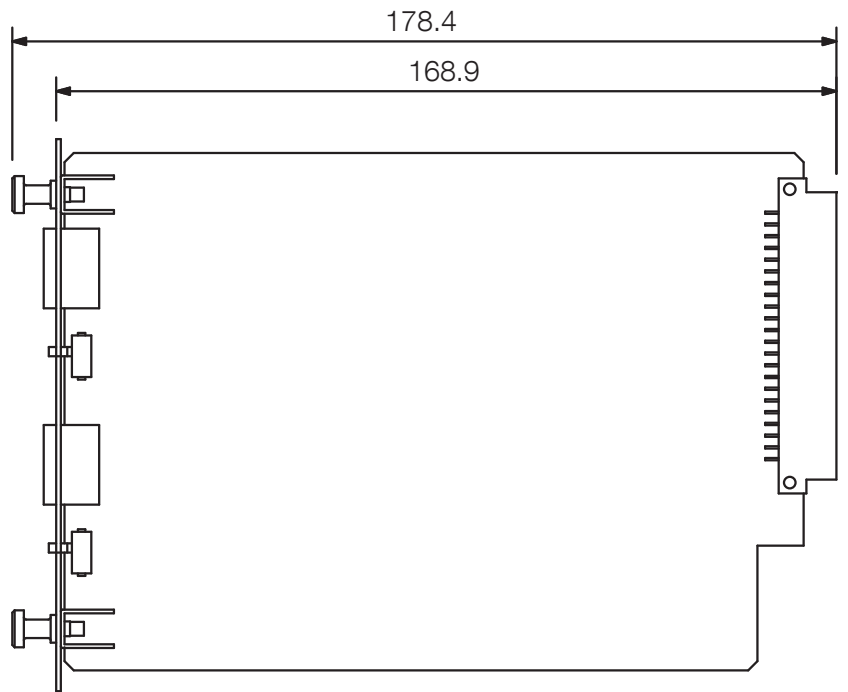

Side View

UNIT:mm

SCALE:1/2

## A&E specifications

Input module with two balanced audio inputs. Plug-in series screw connector for signal input. Sensitivity and phantom power on the front of the D-901 or via PC software switchable, ground-lift switch.