



■ DESCRIPTION

The DM-518-AM is a gooseneck paging microphone with push-to-talk switch and remote control output. The microphone body is solidly constructed of metal die-cast and designed to reduce switching and handling noise.

■ SPECIFICATIONS

Type	Moving coil microphone
Directivity	Unidirectional
Frequency Response	50–12,000 Hz
Sensitivity	–63dB ±3 dB (0 dB=1V/Pa, 1kHz)
Rated Impedance	150Ω, balanced
Talk Switch	Short-off circuit type, push-to-talk switch (Normally-Open)
Connection Cable	4 conductor (1 shielded) cable
Finish	Body: Die-cast zinc, painted Metallic Gray Head: Die-cast aluminum and zinc plated steel wire, painted Metallic Gray Gooseneck: High carbon steel and aluminum alloy, electroplating Bright Chrome
Dimensions	Ø39.5 X 162mm [Ø1.56" X 6.38"] (Microphone body)
Weight	720 g (including Connection Cable)
Accessory	Mounting screws ...3 (3/4" length)

■ APPEARANCE

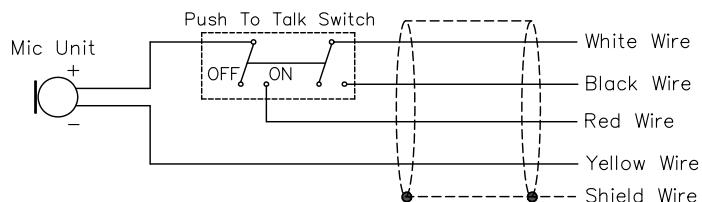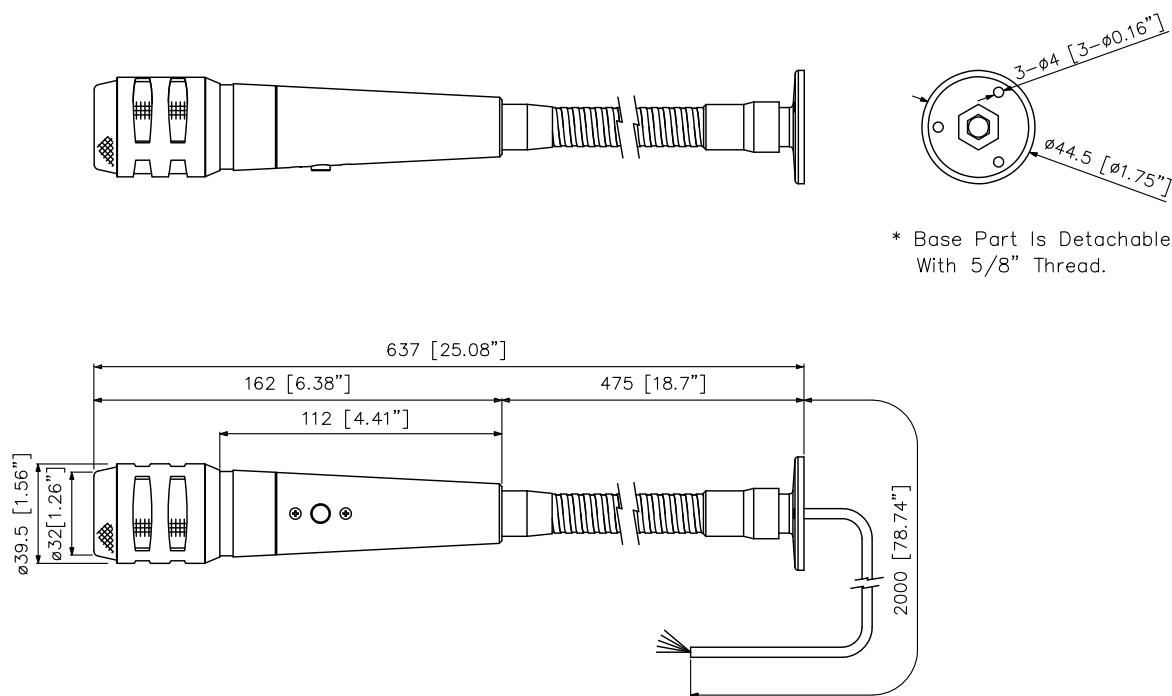

Circuit Diagram

UNIT:mm SCALE:1/3