

## HY-CW1WP

### SPEAKER MOUNTING BRACKET



The HY-CW1WP is designed to be used exclusively to mount the HX-5 series speaker system to a ceiling. The speaker can be rotated 360° horizontally. It can also be tilted vertically up to 82.5° when suspended horizontally, and depending on the speaker directivity mode, up to 67.5° (for 60° mode) or 75° (for 15°, 30° or 45° mode) when suspended vertically. This bracket is designed for outdoor use.


### Key features

## Specifications

Installation Environment	Indoor installation, under-eave installation(*1)
Finish	Stainless steel
Dimensions	120 (W) x 200 (H) x 220 (D) mm
Weight	2 kg
Included Accessories	Speaker rear bracket mounting bolt (M8) with washer ...4

(\*1) Avoid installaing the speaker in locations close to the seashore or in indoor swimming facilities that are not well ventilated. In such locations, the bracket may be vulnerable to corrosion, eventually allowing the speaker to fall resulting in personal injury.

## Dimensions

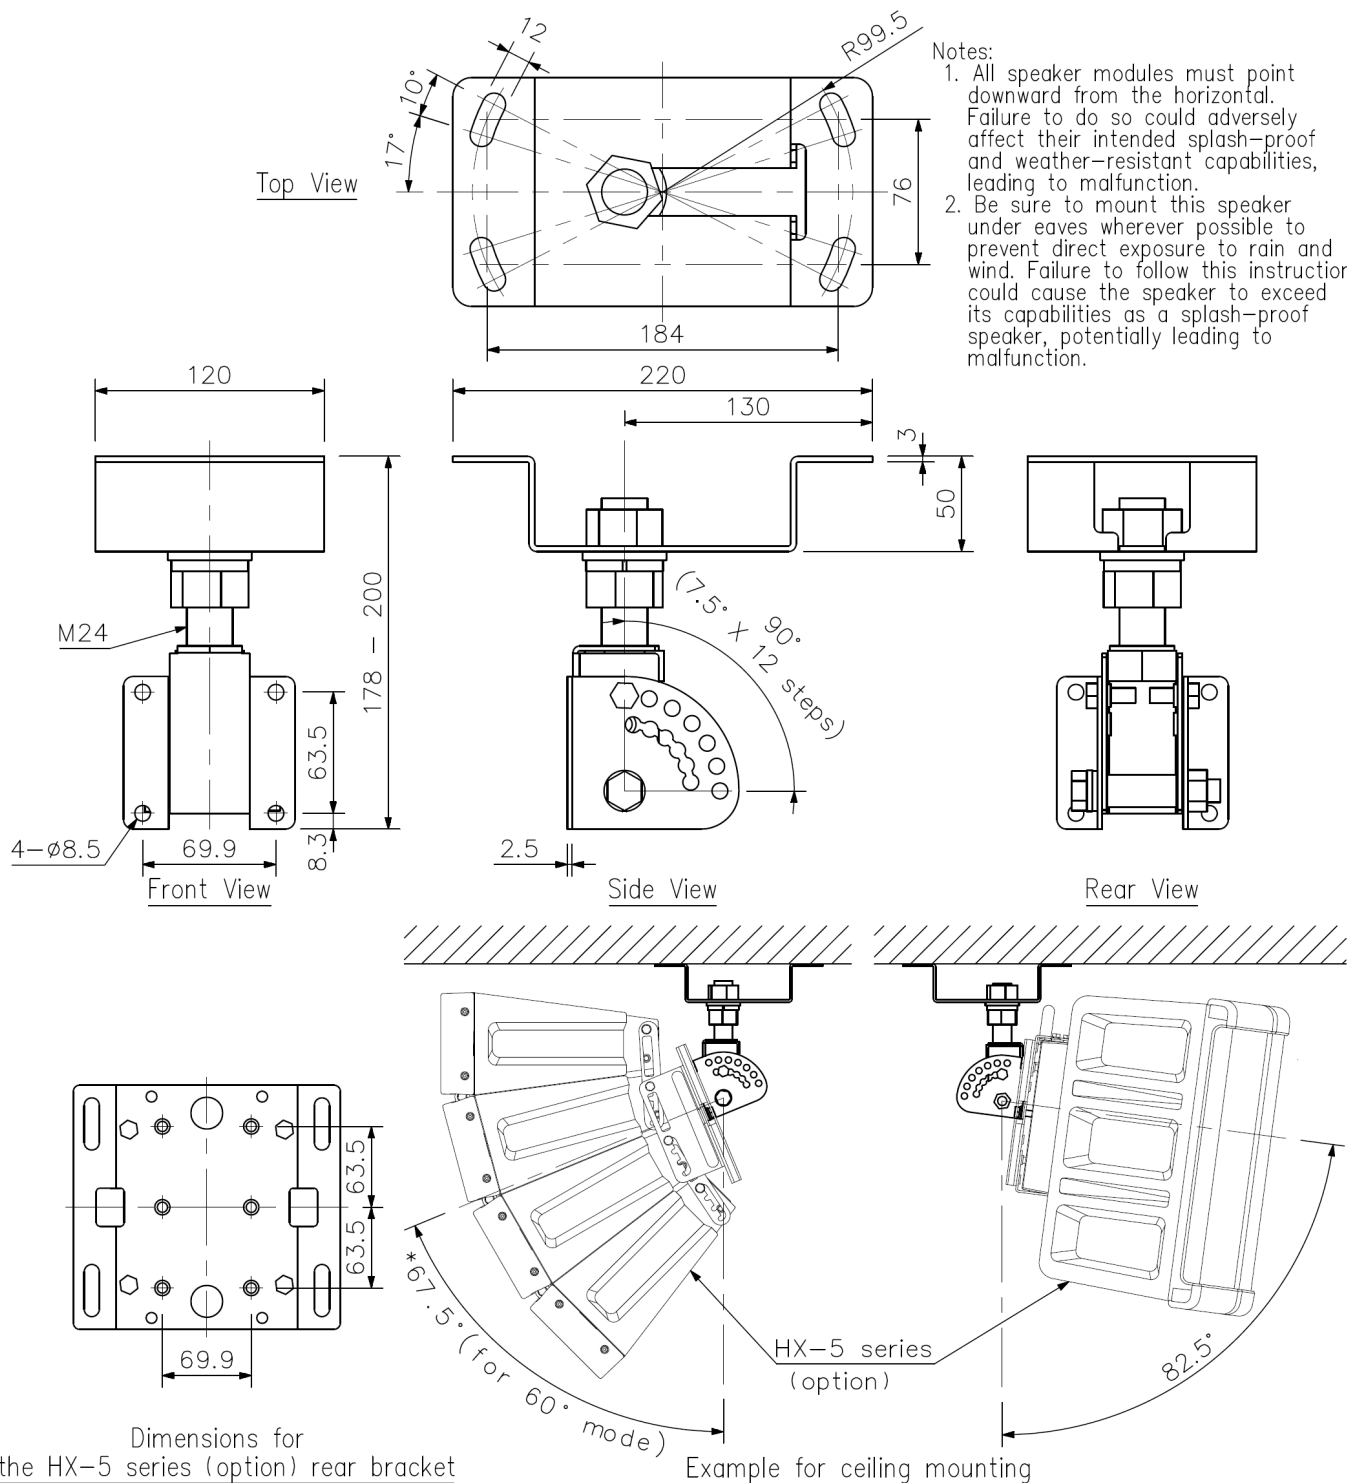

UNIT:mm

\* 75° (for 15°, 30° or 45° mode)

## A&E specifications

\*UNDEFINED TEXT\*