

RS-142

SWITCH BOARD



The RS-142 is a switch board designed for use with the N-8000RS or N-8010RS 2-Core Shielded Substation Interface Unit. You can make desired switch panels to meet intended purposes by combining the RS-142 with the separately prepared operation panel having 2 switches to be used as call buttons. Also, it can be used in connection with the RS-141 Ip Intercom Option Handset.


Key features

- Possibility to make desired switch panels to meet intended purposes by combining RS-142 with the separately prepared operation panel
- 2 switches to be used as call buttons
- Half-duplex conversation
- Conversation via external speaker (optional)
- Handset conversation (with optional RS-141)

Specifications

Call Button Wiring	4 cables (for 2 momentary switches)
Wiring	Two-core shielded cable
Transmission Range	0.5 km (546 yd)/#0.5 mm (AWG24) 0.8 km (874 yd)/#0.65 mm (AWG22) 1.3 km (1421 yd)/#0.9 mm (AWG19)
Operating Temperature	0 # to +40 # (32 # to 104 #)
Weight	30 g (0.07 lb)

Dimensions

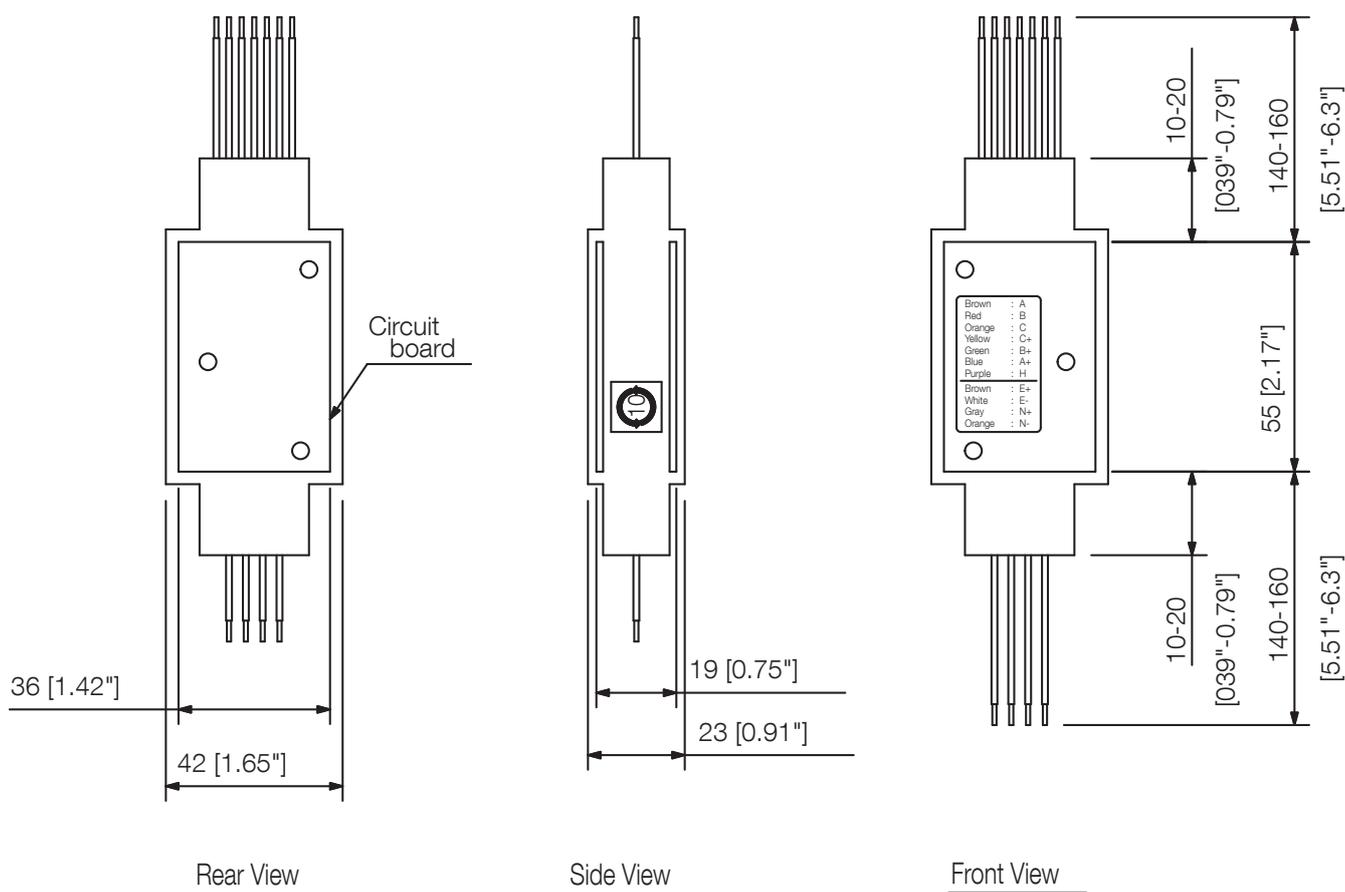

UNIT:mm

SCALE:1/2