

RS-180

SUB STATION



The RS-180 can call and converse with the registered master stations. The RS-180 can call and converse with the registered master stations.


Key features

- Indoor use
- Heavy duty stainless steel faceplate
- Allows connecting to a remote alarm light or siren
- Status LED
- Half-duplex conversation

Specifications

Rated Input	1 W
Rated Impedance	625 Ω (1 W/25 V)
Control Output	Open collector, Withstand voltage: 30 VDC, Control current: 30 mA (The open collector output is kept turned on till the conversation is finished after the call button was pressed.)
Internal Speaker	4 cm cone-type
Wiring	Two-core shielded cable
Transmission Range	0.5 km (546 yd)/#0.5 mm (AWG24) 0.8 km (874 yd)/#0.65 mm (AWG22) 1.3 km (1421 yd)/#0.9 mm (AWG19)
Operating Temperature	-10 # to +50 # (Temperature range not to freeze the speaker and switch)
Finish	Panel: Stainless steel, hairline Call button: Metal Printed circuit board: Weather-resistant coating
Dimensions	120 (W) x 120 (H) x 58.5 (D) mm (4.72" x 4.72" x 2.30")
Weight	570 g
Included Accessories	Box mounting screw (No.6-32UNC x 18)4, Box mounting screw (M4 x 25)4
Compatible Box	For flush-mount: 2-gang electrical box YC-302 (option)

Dimensions

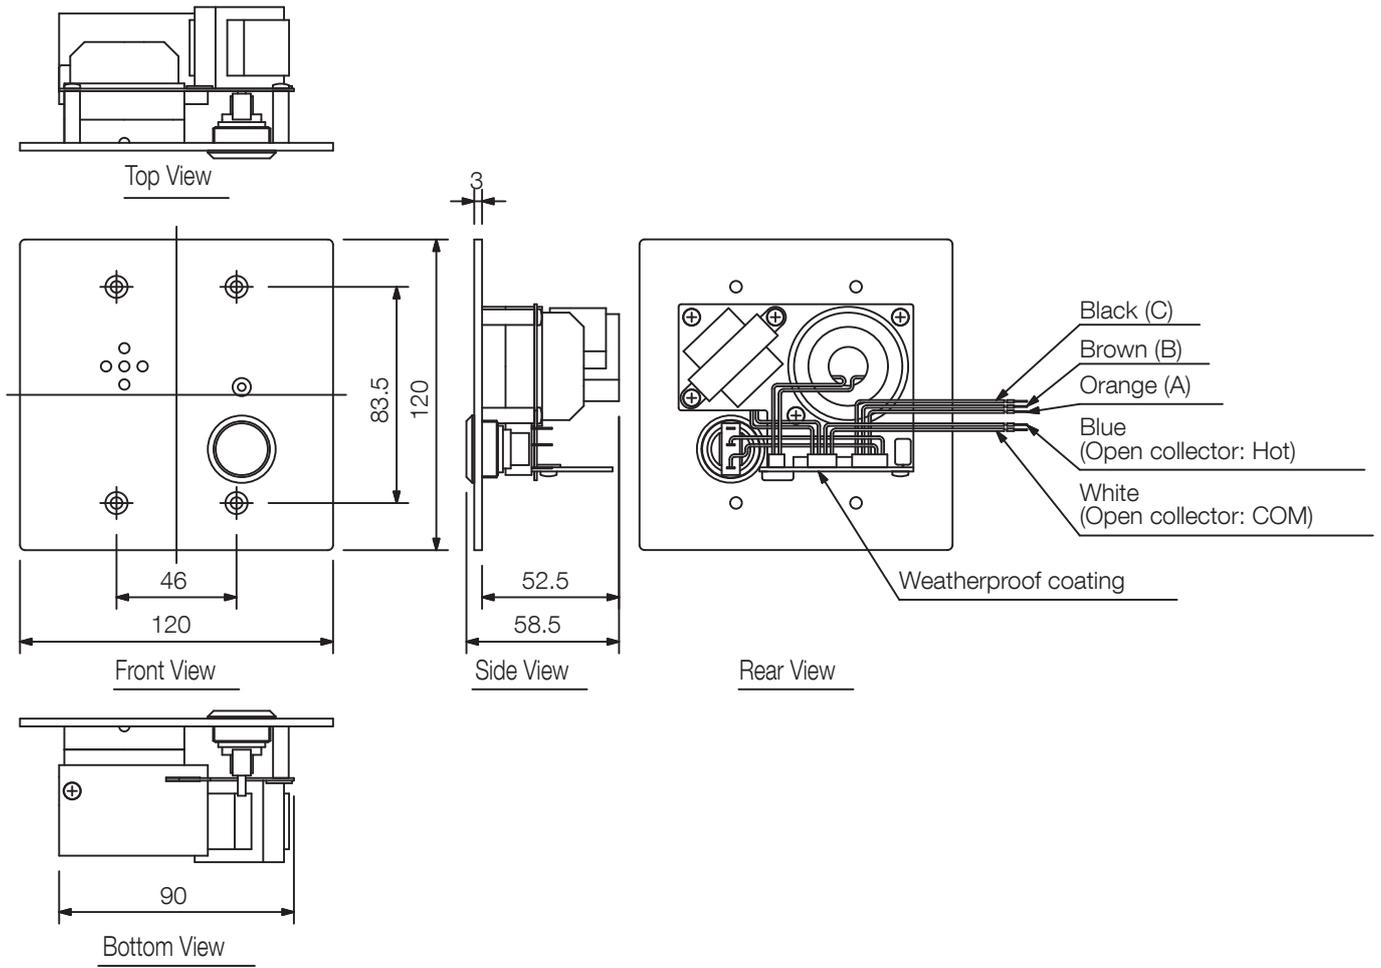

UNIT:mm SCALE:1/3

A&E specifications

UNDEFINED TEXT