

SC-610T

PAGING HORN SPEAKER



The SC-610T is a compact, highly intelligible speaker suited to public address announcement applications. Its external speaker component finished with powder coating, and stainless steel bracket and screws ensure the unit's weatherproof capability.

Key features


- Delivers Clear Audio: High sound pressure level (110 dB) ensures intelligible voice announcements.
- Weather-Resistant Design: IP65-rated and corrosion-resistant materials support outdoor use in typical conditions.
- Durable Build: Shock-resistant aluminum horn and stainless steel hardware provide long-term reliability.
- Compact and Lightweight: Easy to install in various locations, weighing only 1.2 kg (2.65 lbs).
- Flexible System Integration: Equipped with an impedance selector for easy matching in distributed audio systems.

Specifications


Rated Input	10 W
Rated Impedance	70 V line: 500 Ω (10 W), 1 k Ω (5 W), 2 k Ω (2.5 W) 25 V line: 63 Ω (10 W), 130 Ω (5 W), 500 Ω (1.3 W), 1 k Ω (0.6 W), 2 k Ω (0.3 W)
Sound Pressure Level	110 dB (1 W, 1 m at 500 Hz to 2.5 kHz peak level)
Frequency Response	315 Hz - 12.5 kHz
Polarity	Hot: Black, Com: White
Dust/Water Protection	IP65
Operating Temperature	-20 °C to +55 °C (-4 °F to 131 °F) (must be free from dew condensation)
Finish	Horn flare: Aluminum, off-white, powder coating Reflector horn and rear cover: ABS resin, off-white Bracket, screws and bolts: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6 mm in diameter, 600 mm in length)
Dimensions	172 (W) x 161 (H) x 188 (D) mm (6.77" x 6.34" x 7.40")
Weight	1.2 kg (2.65 lbs)
Optional Accessories	Swivel bracket: YS-151S (Can be used instead of the supplied bracket.)

Note: Avoid installing the speaker in locations which vibrate considerably or under environments easy to be oil-contaminated.

Dimensions




Rear View

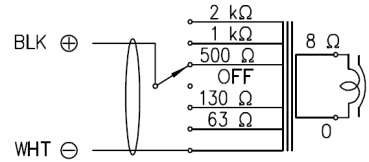

(Transformer connection when the speaker is supplied from the factory)


Wiring diagram

CAUTION
NEVER SET THE SWITCH TO "≡" POSITION
FOR 70 V LINE OPERATION, AS DOING SO MAY
RESULT IN DAMAGE TO THE SPEAKER.




Set the impedance selector
to the desired impedance.


Impedance selection

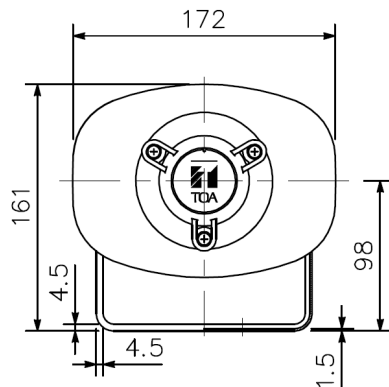

Front View



Bracket dimensional diagram

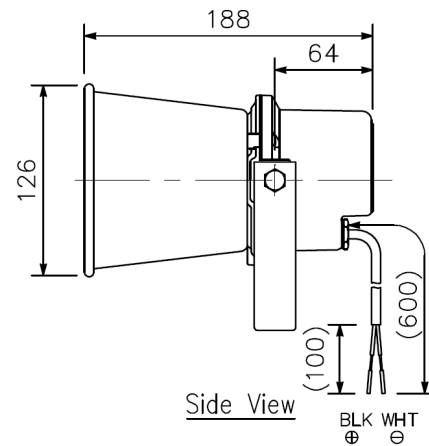

Side View

BLK ⊕ WHT ⊖

UNIT:mm

Note: Numerical values in parentheses are for reference only.

A&E specifications

The paging horn speaker shall be a double re-entrant design suitable for paging and tone signaling distribution. The speaker component shall be a compression driver with a phenolic diaphragm to prevent deformation from heat and moisture. Power handling shall be 10 watts, and the speaker shall include a built-in matching transformer for connection to 25 V and 70.7 V speaker lines.

Transformer wattage taps shall be:

- 70.7 V line: 10 W (500 ohms), 5 W (1k ohms), 2.5 W (2k ohms)
- 25 V line: 10 W (63 ohms), 5 W (130 ohms), 1.3 W (500 ohms), 0.6 W (1k ohms), 0.3 W (2k ohms)

The sound pressure level, measured at 1 meter with 1 watt of power applied (500 Hz to 2.5 kHz), shall be 110 dB SPL (typical).

Frequency response shall be 315 Hz to 12.5 kHz.

The speaker shall comply with IEC IP65 standards for dust and moisture resistance, and operate within a temperature range of -4 °F to +131 °F (-20 °C to +55 °C).

Construction shall include:

Horn flare: aluminum, off-white, powder coating

Reflector horn and rear cover: ABS resin, off-white

Speaker cable: integral PVC-insulated cable with strain relief, 0.24" (6 mm) diameter, 24" (600 mm) length

Speaker dimensions shall be 6.77" (W) × 6.34" (H) × 7.40" (D) [172 × 161 × 188 mm], and weight shall be 2.65 lbs. (1.2 kg).

The paging horn speaker shall be TOA model SC-610T.

The optional swivel-mount bracket shall be TOA model YS-151S.