

## T-12S

### LINE OUTPUT PREAMP MODULE



The T-12S is an AUX module to be used in conjunction with the 900 series and AX-1000 amplifier. It has a balanced line output, as well as an input that can control muting operations of a signal output.


### Key features

- Unbalanced line input for AM/FM tuners, cassette decks, CD players, computer sound cards, jukeboxes, mixers and satellite receivers
- Balanced transformer-isolated uninterrupted output of module's input signal
- Output level control for adjusting the MOH output signal level
- Responds to mute bus activation via mute send module or switch-closure
- Connector: screw terminal

## Specifications

Power Supply	24 VDC
Current Consumption	Less than 38 mA
Input Sensitivity (Rated Output 100 mV)	100 - 1,000 mV (adjustable)
Noise Output	Less than 50 $\mu$ V
Frequency Response	20 Hz - 20 kHz
Distortion	Less than 0.1 %
Line Output Level	70 - 800 mV (adjustable)
Muting Time	3 - 5 s
Signal Muting Level	More than 60 dB
Input Connector	5P screw terminal
Output Connector	6P card edge-connector
Dimensions	35 (W) x 78 (H) x 88 (D) mm
Weight	95 g

## Dimensions

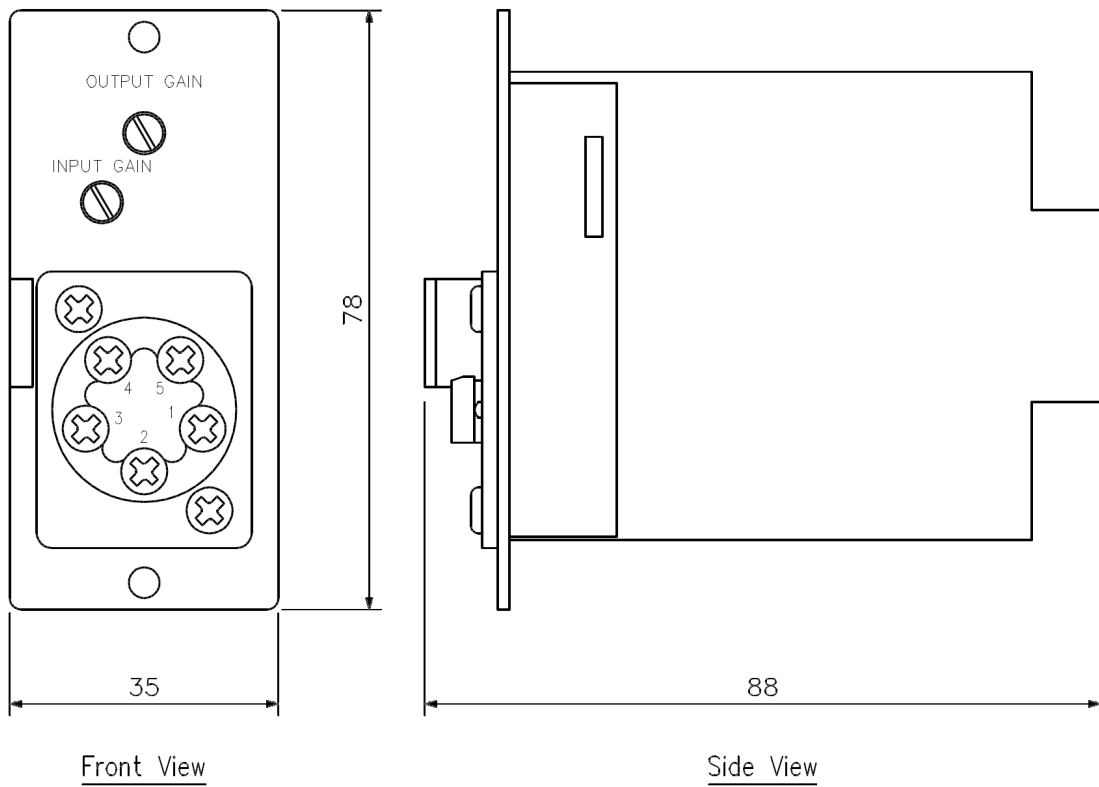

CONNECTION	
1:	Earth
2:	Common
3:	Output
4:	Input
5:	Earth

UNIT: mm