

TS-923

STANDARD MICROPHONE UNIT



The TS-923 Microphone is a dedicated component of the Infrared Conference System's Chairman unit and Delegate unit. Its mic head is equipped with an illuminated display ring that allows the status of the units in use to be monitored at a glance. Its gooseneck has two flexible parts, making it possible to adjust the microphone to an optimal position for the user.


Key features

- Gooseneck microphone with two flexible sections
- Unidirectional electret condenser microphone
- Red lights ring to display talk released
- XLR-4-32 connector
- Sensitivity: -37 dB (1 kHz, 0 dB = 1 V / PA)
- Frequency response: 100 Hz - 13 kHz
- Length: 470 mm (1.54 ft)

Specifications

Type	Electret condenser microphone
Directivity	Unidirectional
Impedance	1.4 k Ω
Rated Sensitivity Level	-37 dB (1 kHz 0 dB = 1 V/Pa)
Frequency Response	100 Hz - 13 kHz
Output Connector	Equivalent to XLR-4-32
LED Indicator	Speech indicator (ring type) Red
Bending Section	2
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Body: Aluminum, black, semi-gloss, paint Shaft: Copper alloy, black, semi-gloss, paint
Length	470 mm (1.54 ft)
Weight	130 g (0.29 lb)
Compatible Unit	Chairman unit: TS-821, TS-921, TS-811, TS-911 Delegate unit: TS-822, TS-922, TS-812, TS-912

Dimensions

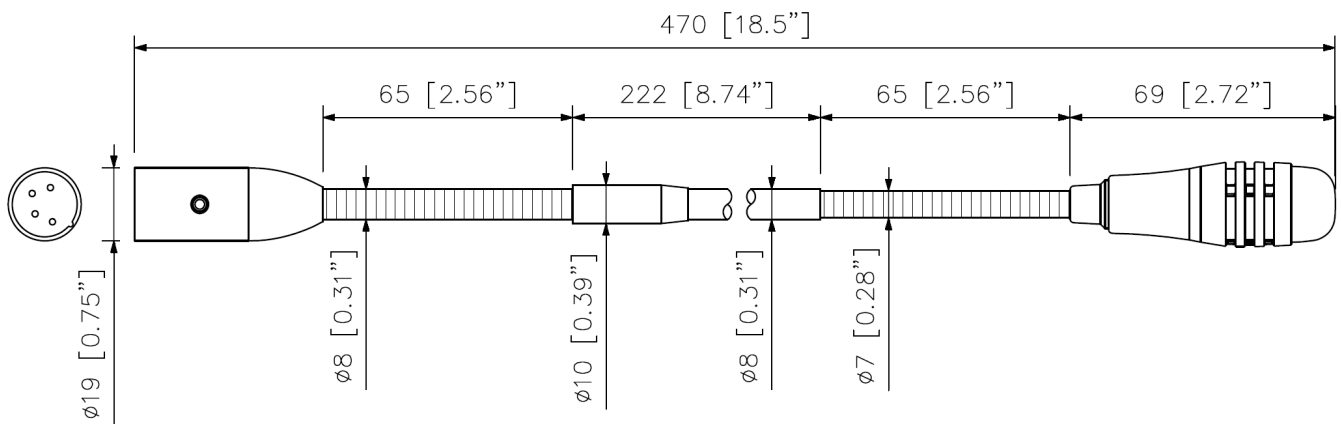

UNIT: mm

A&E specifications

Gooseneck microphone with red lights ring to display talk released, with two flexible sections. XLR-4-32 connector for connection to the Delegate and Chairman Units of Infrared Conference systems: TS-820(RC)/TS-920RC.

Sensitivity: -37 dB (1 kHz, 0 dB = 1 V / PA) Frequency response: 100 Hz - 13 kHz Color: black, semi-gloss, paint Length: 470 mm (1.54 ft) Weight: 130 g (0.29 lb) The standard microphone unit shall be the TOA model TS-923.