


U-01F

AUX PREAMPLIFIER MODULE

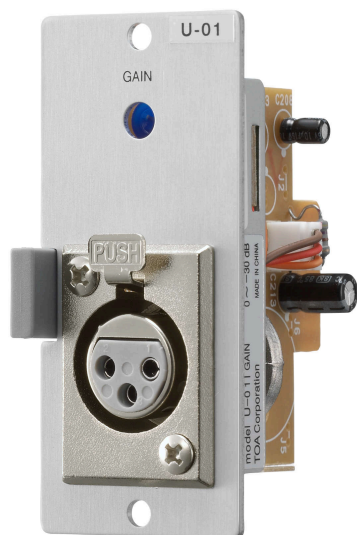

The U-01F is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced line input with female XLR type connector, and gain control.

Key features


- For unbalanced, line level sources such as tuners, cassette decks, CD players, computer sound cards, jukeboxes, mixers and satellite receivers
- Use for adjacent sources (less than 15ft from the host unit)
- Connectors: female XLR

Specifications

* 0 dB=1 V


Power Supply	24 V DC (supplied from the main frame)
Current Consumption	4 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 k Ω , unbalanced
Frequency Response	20 Hz - 20 kHz \pm 1.0 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-106 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Connector	Female XLR connector (XLR-3-31 equivalent)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 75 g (0.17 lb)

Dimensions

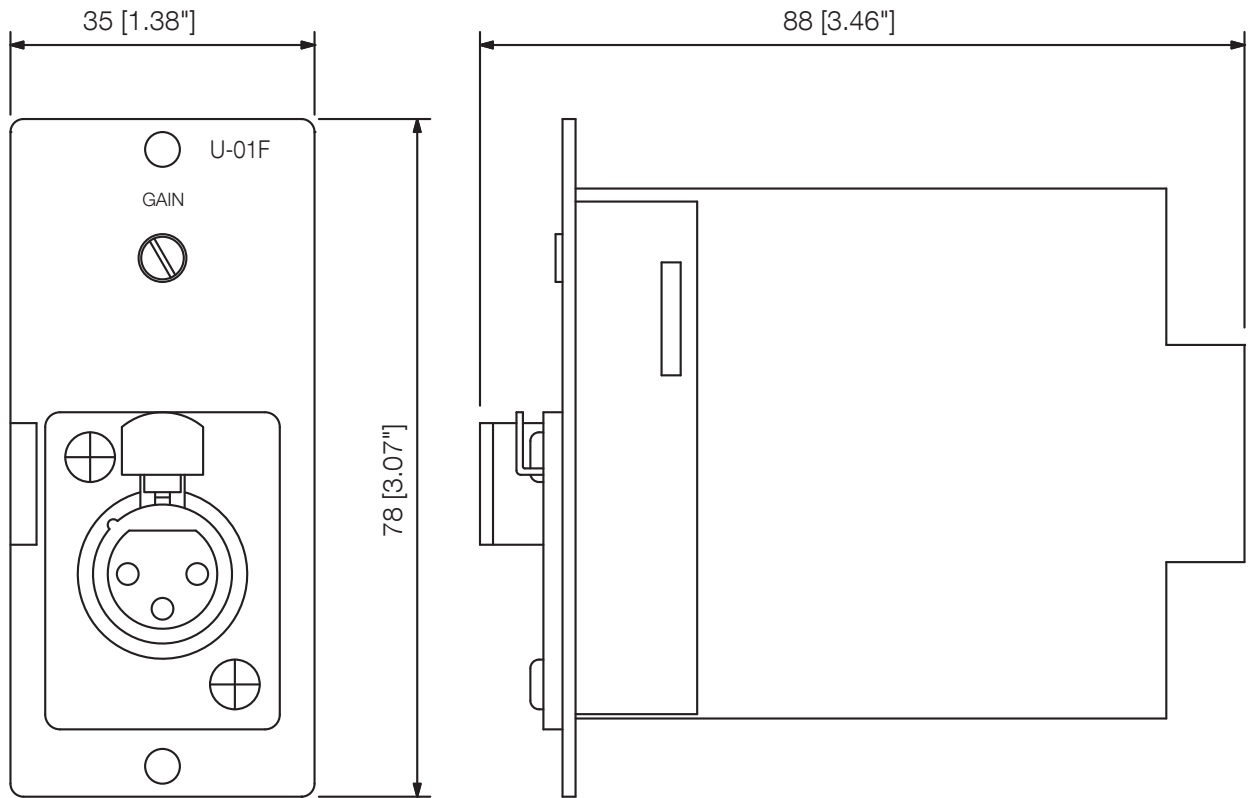

Front View

Side View

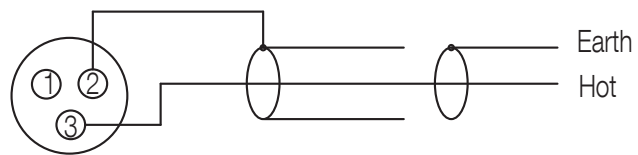

Connection Diagram

UNIT:mm

SCALE:1/1

A&E specifications

The line input module shall be unbalanced, 220k ohms with female XLR connector.

The line input module shall be TOA model U-01F.