

U-01P

AUX PREAMPLIFIER MODULE



The U-01P is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced line input with 6.3 (1/4") phone jack connector, and gain control.

Key features



- For Unbalanced, Line Level Sources such as AM/FM tuners, cassette decks, CD players, computer sound cards, jukeboxes, mixers and satellite receivers.
- Use For Adjacent Sources (less than 15 feet from the hos unit)
- Connector: 1/4" phone jack

Specifications

* 0 dB=1 V

Power Supply	24 V DC (supplied from the main frame)
Current Consumption	4 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 k Ω , unbalanced
Frequency Response	20 Hz - 20 kHz \pm 1.0 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-106 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Connector	#6.3 (1/4") Phone jack (3P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 75 g (0.17 lb)

Dimensions

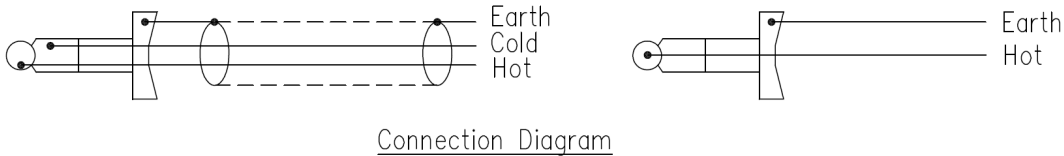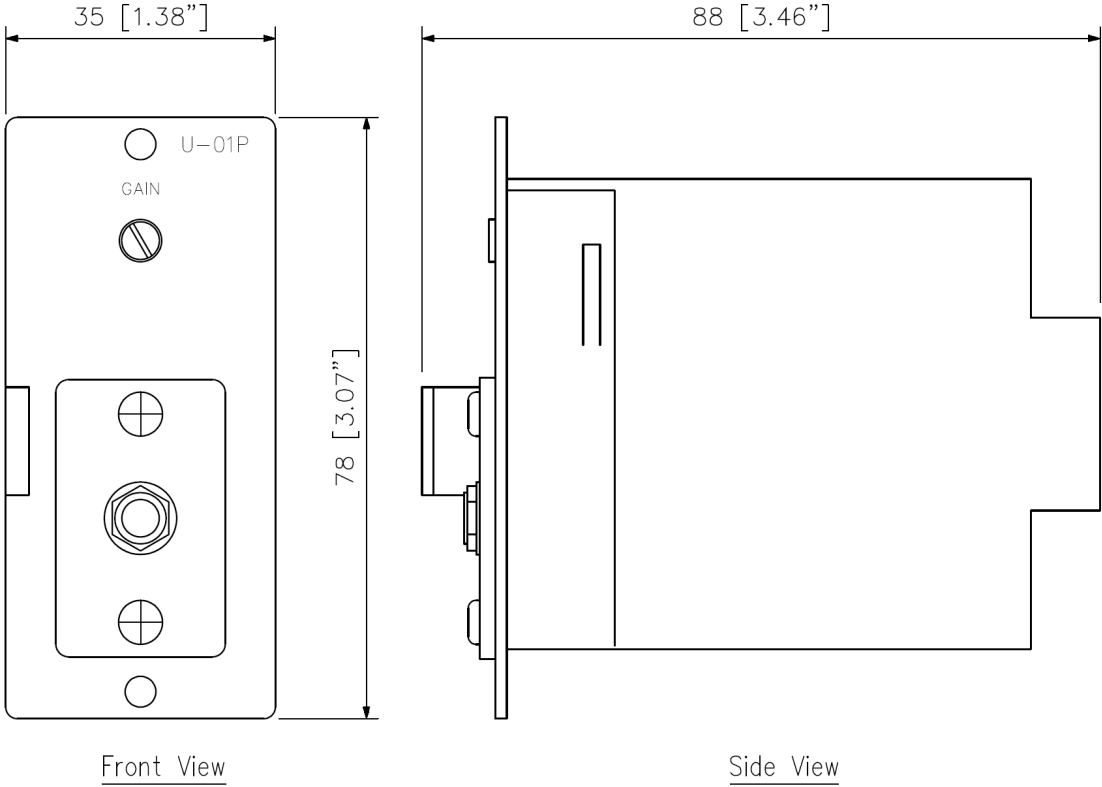

UNIT:mm