


U-01S T

AUX PRIAMPLIFIER MODULE

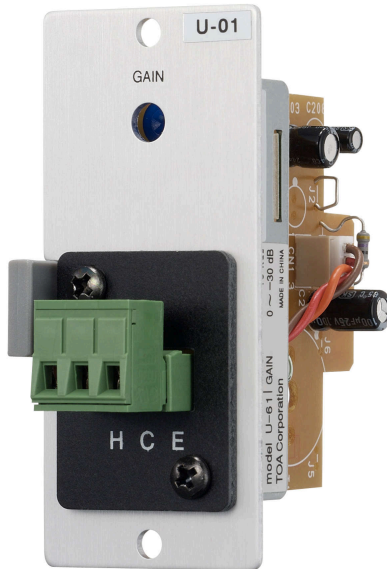

The U-01S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced line input with removable terminal block connector, and gain control.

Key features


UNDEFINED TEXT

Specifications

* 0 dB=1 V


Power Supply	24 V DC (supplied from the main frame)
Current Consumption	4 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 k Ω , unbalanced
Frequency Response	20 Hz - 20 kHz \pm 1.0 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-106 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Connector	Removable terminal block (3P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 75 g (0.17 lb)

Dimensions

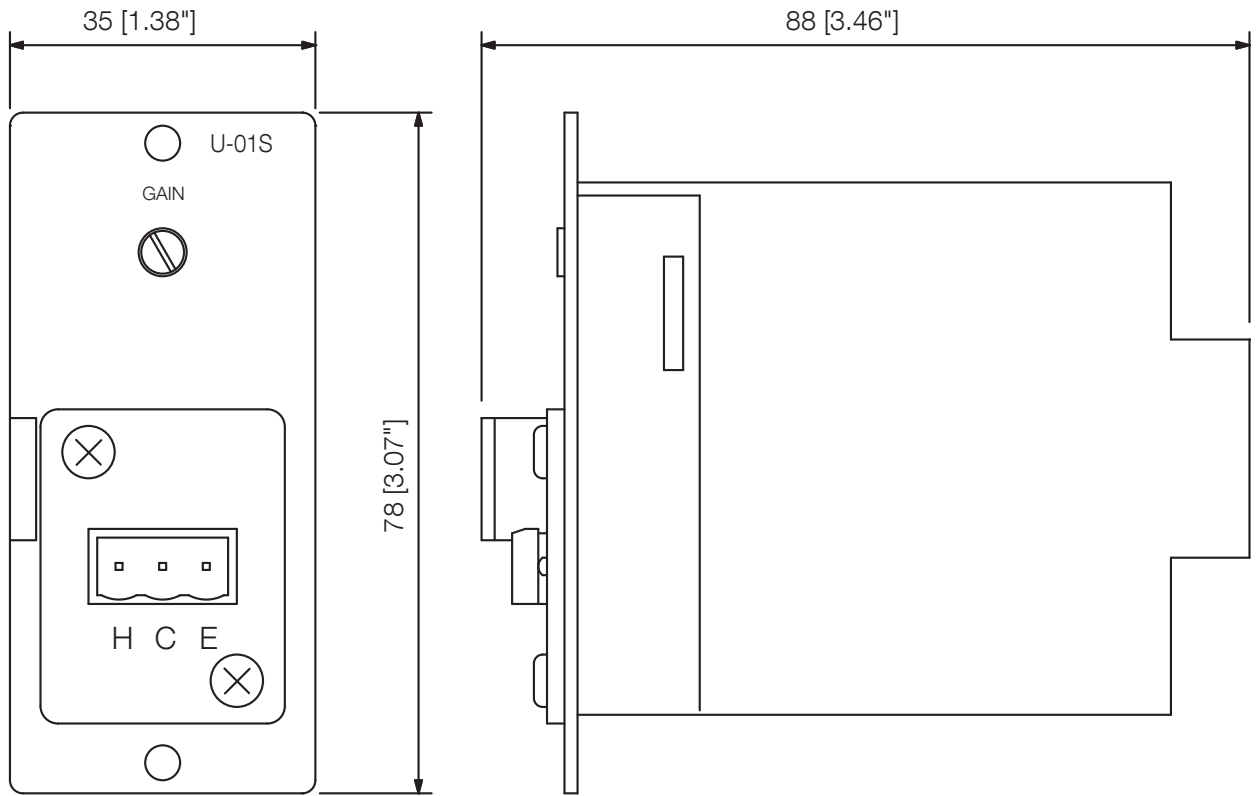

Front View

Side View

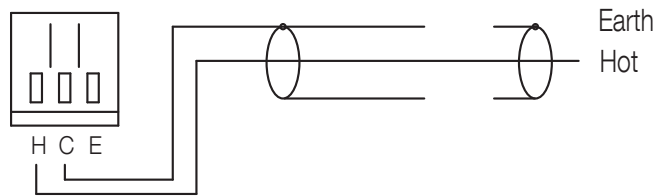

Connection Diagram

UNIT:mm

SCALE:1/1

A&E specifications

UNDEFINED TEXT