

## U-03R

### AUX PREAMPLIFIER MODULE



The U-03R is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has a low-cut and a high-cut filter.


### Key features

- For unbalanced, line level sources such as tuners, cassette decks, CD players, computer sound cards, jukeboxes, mixers and satellite receivers
- Use for adjacent sources (less than 15ft from the host unit)
- High and low cut filters for tone control
- Connectors: dual RCA jack w/ passive summing

## Specifications

Power Supply	24 V DC
Current Consumption	Under 8 mA
Input Sensitivity (Rated Output 100 mV)	100 - 3,600 mV (adjustable)
High Cut Filter (10 kHz)	-7 to -13 dB
Low Cut Filter (100 Hz)	-5 to -15 dB
Noise Output	Under 10 $\mu$ V
Frequency Response	20 Hz - 20 kHz
Distortion	Under 0.05 %
Input Connector	RCA pin jacks
Output Connector	6P card edge-connector
Dimensions	35 (W) x 78 (H) x 88 (D) mm
Weight	50 g

## Dimensions

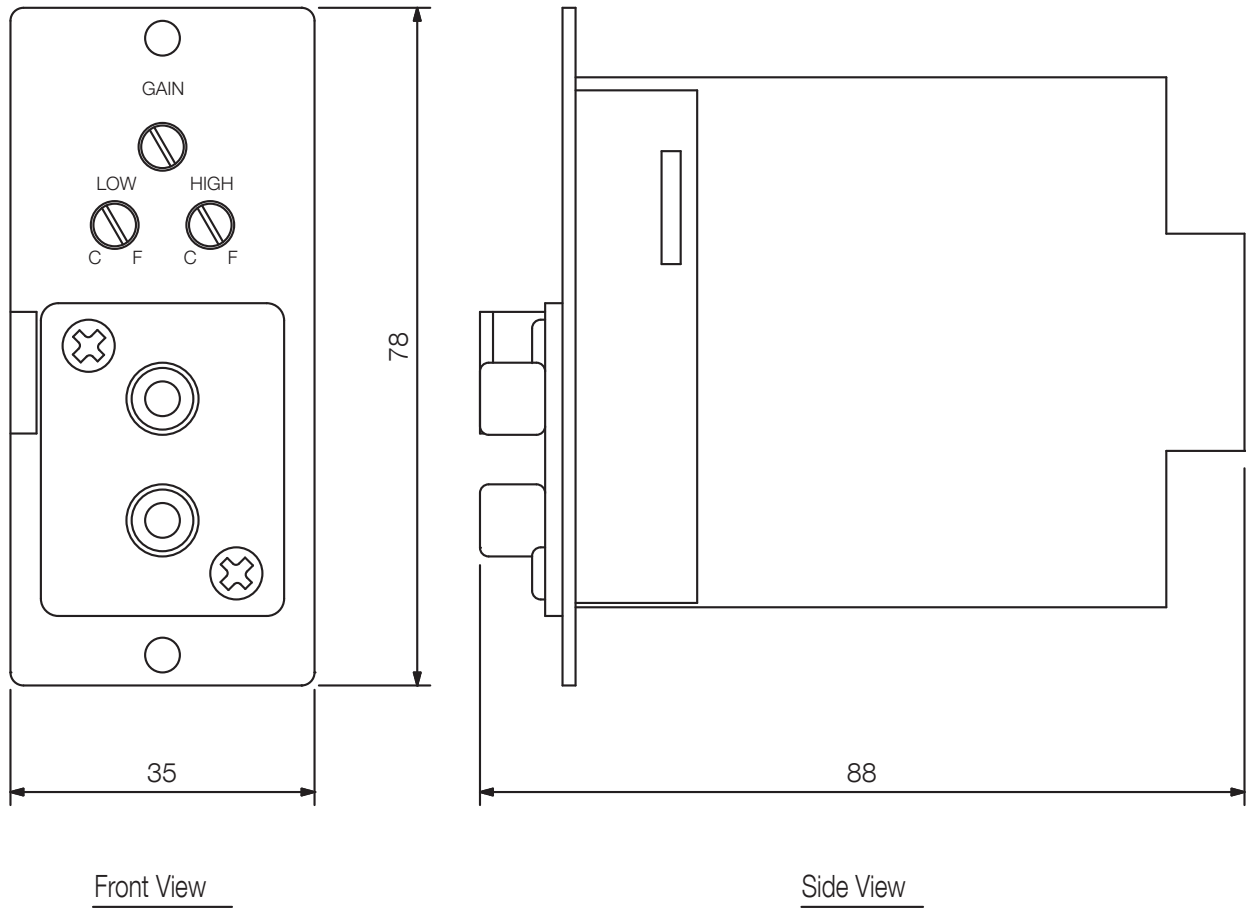

CONNECTION	Center: Hot (mixing input)
------------	----------------------------

UNIT:mm      SCALE:1/1

## A&E specifications

The line input module shall be unbalanced, 220k ohms, low/hi-cut filters with stereo summing dual RCA jack connector.  
The line input module shall be TOA model U-03R.