

## U-13S

### AUX PREAMPLIFIER MODULE



The U-13S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced line matching input with removable terminal block connector and mute-receive function.


### Key features

- For unbalanced, line level sources such as tuners, cassette decks, CD players, computer sound cards, jukeboxes, mixers and satellite receivers
- Use for adjacent sources (less than 15ft from the host unit)
- High and low cut filters for tone control
- Responds to mute bus activation via mute send module or switch-closure
- Connectors: removable terminal block

## Specifications

Power Supply	24 V DC
Current Consumption	Less than 11 mA
Input Sensitivity (Rated Output 100 mV)	100 - 3,600 mV (adjustable)
High Cut Filter (10 kHz)	-7 to -13 dB
Low Cut Filter (100 Hz)	-5 to -15 dB
Noise Output	Less than 10 $\mu$ V
Frequency Response	20 Hz - 20 kHz
Distortion	Less than 0.05 %
Signal Muting Level	More than 50 dB
Input Connector	3P terminal block
Output Connector	6P card edge-connector
Dimensions	35 (W) x 78 (H) x 88 (D) mm
Weight	50 g

# Dimensions

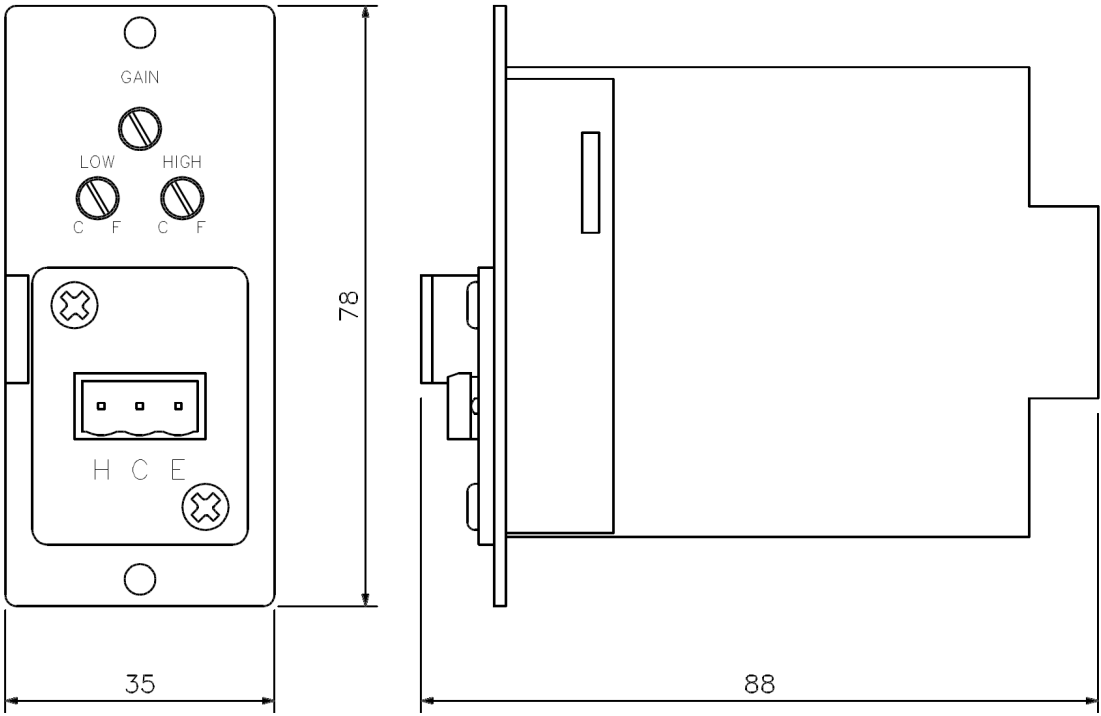

Front View

Side View

CONNECTION	H: Hot C: Common E: Earth
------------	---------------------------------

UNIT:mm