

## U-43S

### AUX PREAMPLIFIER MODULE



The U-43S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced d line matching input with terminal block connector, and mute-send function.


### Key features

- For unbalanced, line level sources such as tuners, cassette decks, CD players, computer sound cards, jukeboxes, mixers and satellite receivers
- Use for adjacent sources (less than 15ft from the host unit)
- High and low cut filters for tone control
- Signal at input terminals activates mute bus
- Connectors: removable terminal block

## Specifications

Power Supply	24 VDC
Current Consumption	Less than 15 mA
Input Sensitivity (Rated Output 100 mV)	100 - 3,600 mV (adjustable)
High Cut Filter (10 kHz)	-7 to -13 dB
Low Cut Filter (100 Hz)	-5 to -15 dB
Noise Output	Less than 10 $\mu$ V
Frequency Response	20 Hz - 20 kHz
Distortion	Less than 0.05 %
Signal-Activated Muting	6 - 15 mV
Input Connector	3P terminal block
Output Connector	6P card edge-connector
Dimensions	35 (W) x 78 (H) x 88 (D) mm
Weight	50 g

# Dimensions

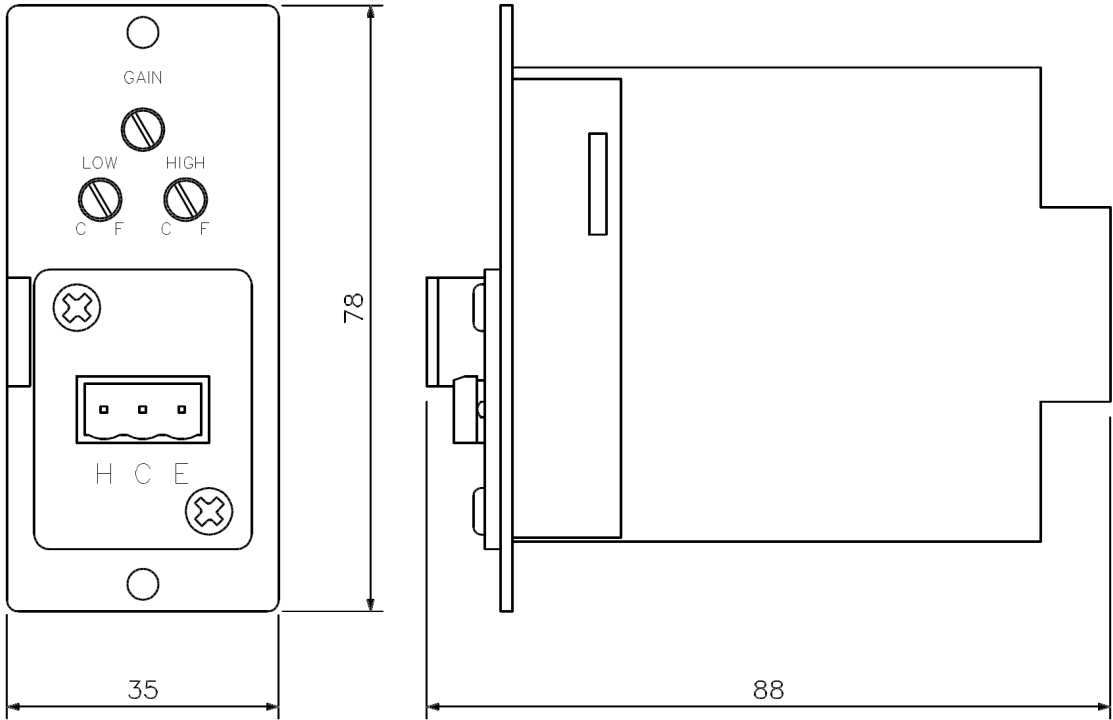

Front View

Side View

CONNECTION	H: Hot C: Common E: Earth
------------	---------------------------------

UNIT:mm