

## ZM-9013

### REMOTE CONTROL PANEL



Designed for exclusive use with the 9000M2 Series or M-864D, the ZM-9013 is a wall mounted remote control panel having 8 buttons. It is used in conjunction with the RC-001T Remote control module or M-864D. It can be mounted in a standard 2-gang electrical box in the wall.


### Key features

- 8 assignable buttons with LED status indicator for Xpoint settings (on/off, select), paging activation, scene, relay activation
- Assignable ID rotary adjustment on box

## Specifications

Power Source	24 V DC (supplied from RC-001T or M-864D)
Current Consumption	50 mA or less
Control	8 function buttons
Indicator	8 function indicators (green LEDs)
Cable Requirements	Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)
Terminal	Removable terminal block (10 pins)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	35 % to 80 %RH (no condensation)
Finish	Surface-treated steel plate, white, paint
Dimensions	120 (W) x 127 (H) x 50.5 (D) mm (4.72 x 5" x 1.99")
Weight	374 g (0.82 lb)
Included Accessories	Box mounting screw (No.6-32UNC x 30) ...4, Box mounting screw (M4 x 30) ...4, Panel mounting screw ...4, Removable terminal plug (10 pins) ...1

# Dimensions

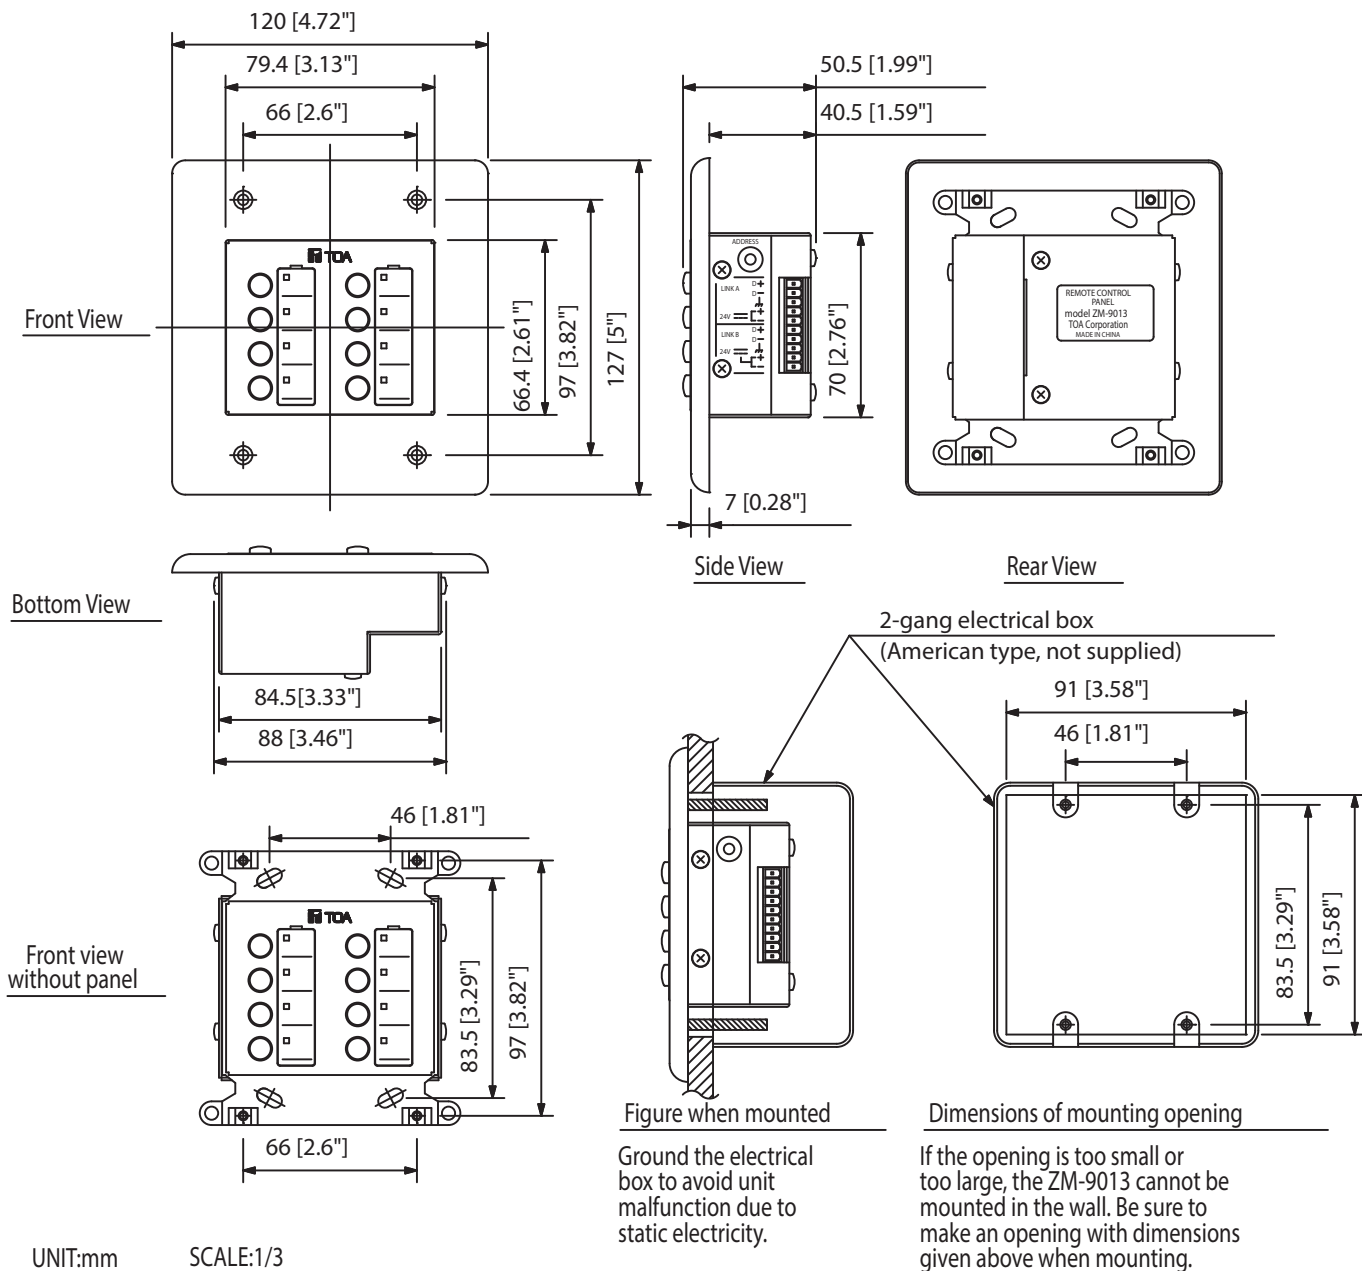

## A&E specifications

Bi-directional remote control unit for the full digital mixer M-9000M2. Eight programmable buttons for retrieving by default, volume settings, or the choice of signal sources. Each button has an LED to indicate the current selection. Simple flush-mounted installation.

Height: 12,7 cm

Depth: 5,6 cm

Width: 12 cm