



2kW Single-Phase Local Metered PDU, 100-127V Outlets (36 5-15/20R), L5-20P/5-20P adapter, 0U Vertical, 72-in.

MODEL NUMBER: PDUMV20-72

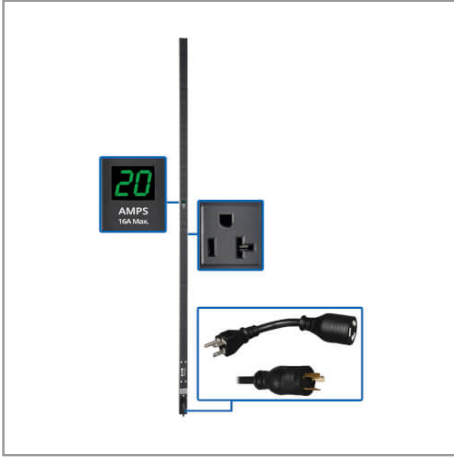

Highlights

- Local Metered single phase 100-127V 16A 0U 72-in. / 183cm vertical rackmount PDU
- Two-digit current meter reports output current in amps
- Attached 15-ft. (4.57 m) cord with NEMA L5-20P plug and 5-20P adapter
- 36 NEMA 5-15/20R outlets
- Toolless button mount and bolt-down bracket installation hardware included

Package Includes

- PDUMV20-72 Local Metered Vertical PDU
- (1) L5-20P to 5-20P plug adapter
- Mounting hardware and spare mounting buttons
- Instruction manual with warranty information

Features

- 16A single phase 100-127V Local Metered Power Distribution Unit / rack PDU (rPDU) (Agency de-rated to 16A continuous)
- Two-digit lighted meter reports combined total output current in amps
- Attached NEMA L5-20P input plug with 15-ft. (4.57 m) line cord and 5-20P adapter
- 0U 72-in. / 183cm vertical rackmount format installs using no rack spaces
- 36 NEMA 5-15/20R outlets
- Includes 20A circuit breaker and lighted power switch inside a transparent protective cover
- Toolless installation supported in button-mount compatible equipment racks
- Bolt-down installation brackets support installation in other racks and additional surfaces

Specifications

| OVERVIEW | |
|--------------------------------|-----------------------------------|
| UPC Code | 037332182838 |
| PDU Type | Local Metered |
| INPUT | |
| Input Phase | Single-Phase |
| PDU Input Voltage | 100; 120; 125; 127 |
| Recommended Electrical Service | Single-phase 20A 100-127V service |
| Maximum Input Amps | 16 |
| Maximum Input Amps Details | Agency de-rated to 16A continuous |



Powering Business Worldwide

TRIPP LITE
SERIES

| | |
|--|---|
| PDU Plug Type | NEMA 5-20P; NEMA L5-20P |
| Input Cord Length (ft.) | 15 |
| Input Cord Length (m) | 4.57 |
| OUTPUT | |
| Output Capacity Details | 2.03kW (127V), 1.92kW (120V), 1.6kW (100V) / 16A total capacity; 16A max per outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (36) 5-15/20R |
| Output Nominal Voltage | 100-127V |
| Overload Protection | 20A circuit breaker |
| USER INTERFACE, ALERTS & CONTROLS | |
| Front Panel LCD Display | Digital meter reports PDU output current in amps |
| Switches | Lighted on/off switch with integrated transparent safety cover |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Aluminum |
| Rack Height | 0U |
| Form Factors Supported | Vertical |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 2.40 x 6.65 x 75.79 |
| Shipping Dimensions (hwd / cm) | 6.10 x 16.89 x 192.51 |
| Shipping Weight (lbs.) | 7.67 |
| Shipping Weight (kg) | 3.48 |
| Unit Dimensions (hwd / in.) | 72.470 x 1.500 x 1.640 |
| Unit Dimensions (hwd / cm) | 184.1 x 4.2 x 3.81 |
| Unit Weight (lbs.) | 6.14 |
| Unit Weight (kg) | 2.79 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 32° to 104°F (0° to 40°C) |
| Storage Temperature Range | -22° to 122°F (-30° to 50°C) |
| Relative Humidity | 5% to 95% non-condensing |
| Operating Elevation | 0-10000 ft. (0-3000 m) |



Powering Business Worldwide

TRIPP LITE
SERIES

| STANDARDS & COMPLIANCE | |
|-------------------------------------|--|
| Product Certifications | RETIE (Colombia); NOM (Mexico); UL 60950-1 |
| Product Compliance | RoHS; FCC Part 15 Class A (USA) |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.