


E80392



RFID antenna adapter to increase the travel speed

ANT-AMPI/490x40/KQ

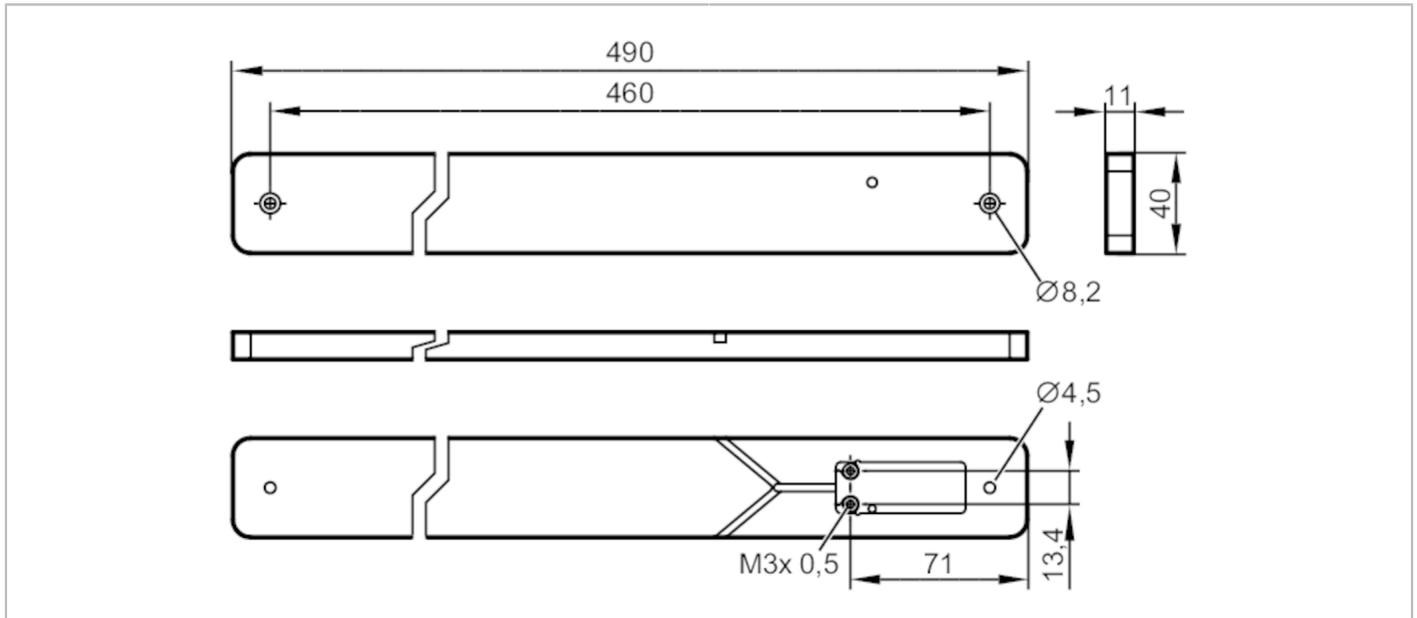

Electrical data		
Operating frequency	[MHz]	13,56
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-20...60
Tests / approvals		
MTTF	[years]	33575
Mechanical data		
Weight	[g]	370.5
Material		POM
Tightening torque	[Nm]	0.5
Remarks		
Pack quantity		1 pcs.
Other data		

Tag E80371 (30 mm)

Antenna	Range without metal		
ANT515 / ANT516 + E80392	30 mm		

Tag E80384 (50 mm)

Antenna	Range without metal		
ANT515 / ANT516 + E80392	50 mm		

E80392



RFID antenna adapter to increase the travel speed

ANT-AMP/490x40/KQ

Tag E80320 (ISO card)

Antenna	Range without metal			
ANT515 / ANT516 + E80392	75 mm			