

Multicast VoIP Microphone

The CyberData Multicast VoIP Microphone is a device that allows the user, while pressing the “Page” button, to broadcast a live or buffered announcements directly to VoIP audio endpoints that support multicast.

This PoE-powered product is perfect for immediate live paging in schools, retail stores and manufacturing environments. In an echo sensitive environment, the delayed page support allows the user to record a message while the page button is depressed. Once the page button is released, the page will be sent.

Features

- Supports multiple user accounts, with distinct log in credentials
- Multicast Transmit
- Compatible with CyberData endpoints that receive multicast
- Page to multicast-enabled phones
- Delayed page support (up to 60 seconds)

- 12-inch flexible shaft microphone
- Desktop design
- Wall mountable

- Web-based configuration and firmware upload
- Autoprovision support


Related Products:



011376 SIP RGB
(Multi-Color) Strobe



011457 SIP IP66
Indoor/Outdoor Horn



011394 SIP Speaker
with Talk-Back



011233 SIP Paging Adapter



011458 Multicast
Ceiling Speaker



011487 Multicast
Wall-Mount Speaker




Specifications

Ethernet I/F	10/100 Mbps
Protocol	Multicast
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Payload Types	G711, A-law and μ -law
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Microphone Length	12 inches [304.8 mm]
Dimensions* (without Microphone Boom)	4.72 inches [120 mm] Length 7.09 inches [180 mm] Width 2.87 inches [73 mm] Height
Weight	1.2 lbs. [0.54 kg]
Boxed Weight	1.8 lbs. [0.82 kg]
Compliance	CE: EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 62368-1; RoHS Compliant; FCC Part 15 Class A; Industry Canada ICES-3 Class A; IEEE 802.3 Compliant; TAA Compliant
Warranty	2 Years Limited
Part Number	011446

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

Multicast VoIP Microphone

Paging to Multicast Enabled Endpoints

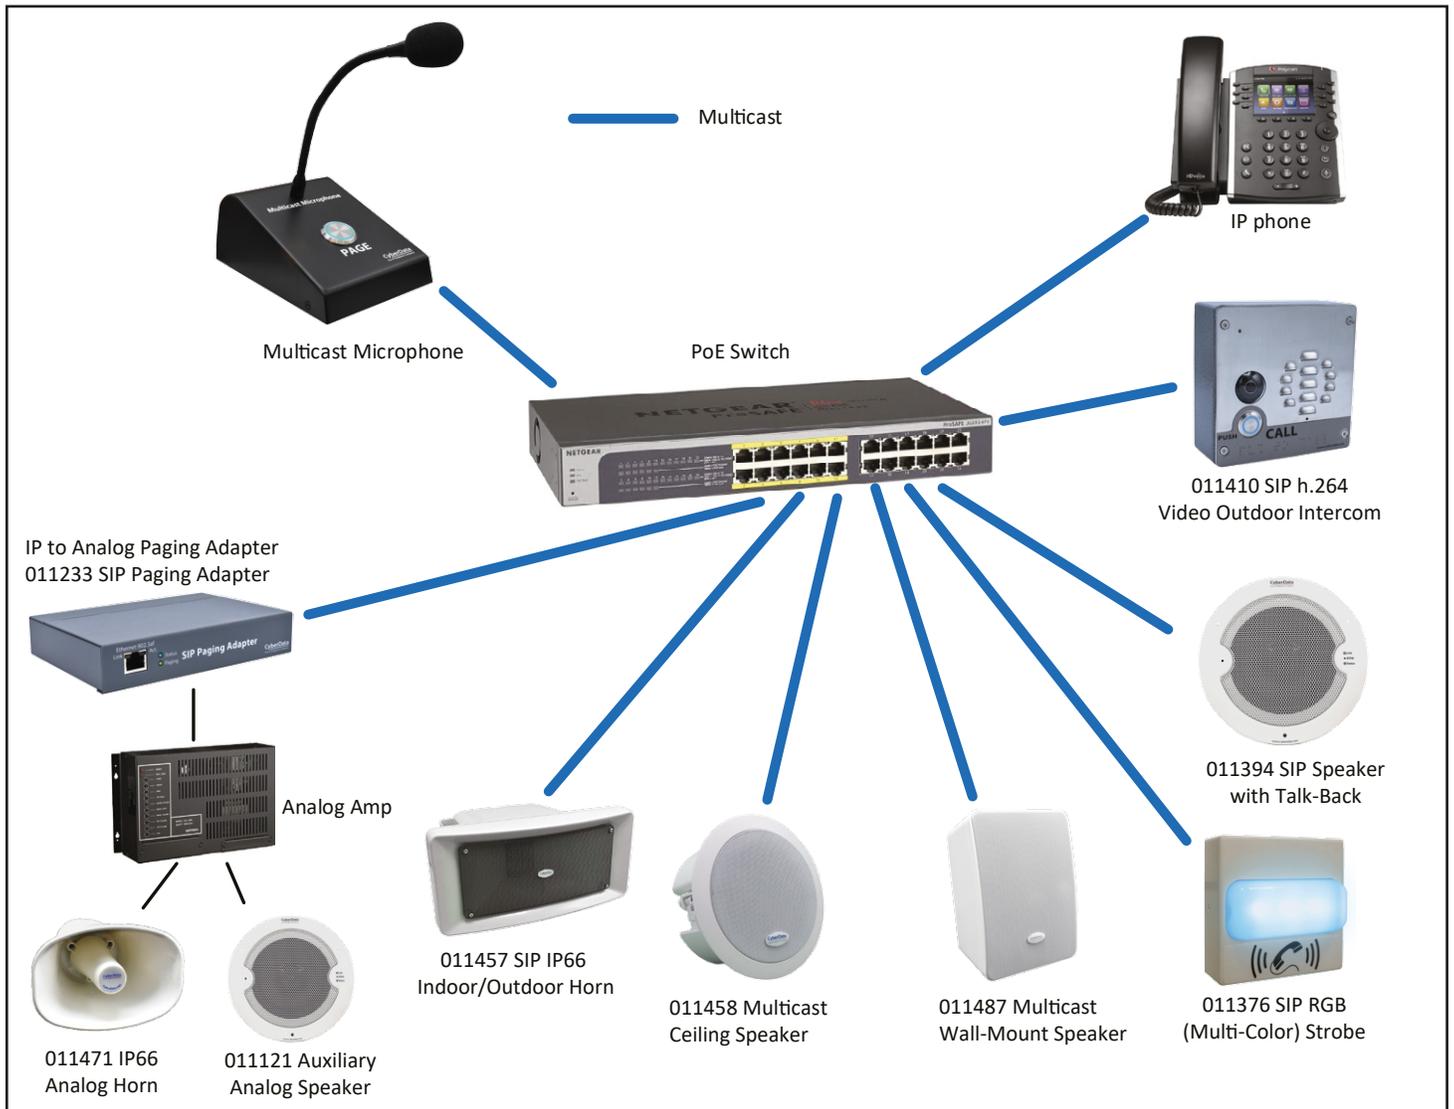

Dimensions

