


IE5304



Inductive sensor

IEK3002BBPKG/V2A/US-104

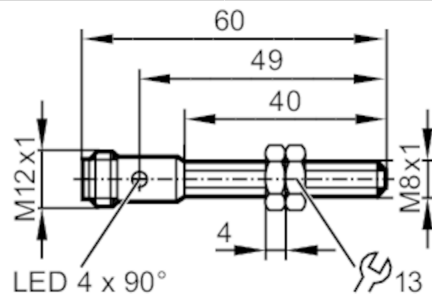

Product characteristics

Electrical design		PNP
Output function		normally open
Sensing range	[mm]	2
Housing		Threaded type
Dimensions	[mm]	M8 x 1 / L = 60

Application

System		Increased sensing range
--------	--	-------------------------

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	800
Short-circuit protection		yes
Overload protection		yes

Monitoring range

Sensing range	[mm]	2
Real sensing range Sr	[mm]	2 ± 10 %
Operating distance	[mm]	0...1.62
Increased sensing range		yes

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	1...20
Switch-point drift	[% of Sr]	-10...10

IE5304



Inductive sensor

IEK3002BBPKG/V2A/US-104

Operating conditions

Ambient temperature	[°C]	-20...70
Protection		IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[years]	1393

Mechanical data

Weight	[g]	22.3
Housing		Threaded type
Mounting		flush mountable
Dimensions	[mm]	M8 x 1 / L = 60
Thread designation		M8 x 1
Material		stainless steel (1.4404 / 316L); sensing face: LCP black; LED window: PEI; lock nuts: stainless steel (1.4404 / 316L)
Tightening torque	[Nm]	A = 5 mm: 2 Nm; B: 5 Nm
Full-metal housing		no

Displays / operating elements

Display	Switching status	4 x 90° LED, yellow
---------	------------------	---------------------

Accessories

Items supplied		lock nuts: 2
----------------	--	--------------

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection - plug

Connector: 1 x M12; coding: A



IE5304



Inductive sensor

IEK3002BBPKG/V2A/US-104

Connection



Diagrams and graphs

Installation

