


PHASE-A-MATIC, INC.

ROTARY CONVERTER DIMENSIONS

DRAWING NO: **TD211 - A**

DATE: 08-01-2022

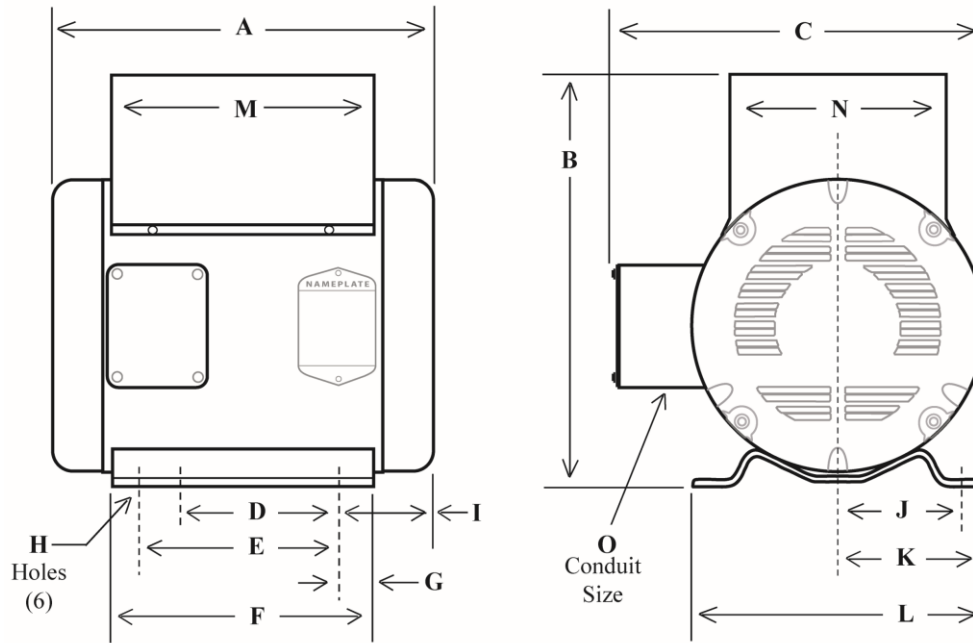

Dimensions in Inches

230V	460V	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	SHIP. DIM.
----	----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----
----	----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----
----	----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----
RWP-5	----	11 1/2	11	9 5/8	4 1/2	5 1/2	6 1/2	1/2	13/32	3	3 3/4	4 5/16	8 5/8	7 1/2	5 1/2	3/4	19 x 12 x 13
RWP-7	----	13 9/16	13	12 1/4	5 1/2	7	8	1/2	13/32	3 9/32	4 1/4	4 3/4	9 1/2	9 1/2	6	3/4	16 x 16 x 16
RWP-10	----	13 9/16	13	12 1/4	5 1/2	7	8	1/2	13/32	3 9/32	4 1/4	4 3/4	9 1/2	9 1/2	6	3/4	16 x 16 x 16
RWP-15	----	17 1/8	17 1/2	14 3/4	8 1/4	10	11 1/4	5/8	17/32	3 9/16	5	5 5/8	11 1/4	11	6 3/4	1	31 x 24 x 21
RWP-20	RH20-11KW	17 1/8	17 1/2	14 3/4	8 1/4	10	11 1/4	5/8	17/32	3 9/16	5	5 5/8	11 1/4	11	6 3/4	1	31 x 24 x 21
----	----	----	---	---	---	--	----	---	----	----	---	---	---	---	---	---	-----
RWP-30	RH30-19KW	20 3/8	18 1/4	19	9 1/2	11	12 1/4	5/8	17/32	4 11/16	5 1/2	6 1/8	12 1/4	12 1/2	8 7/8	1 1/2	31 x 24 x 21
RWP-40	RH40-22KW	22 3/4	20 1/8	21	9	12	13 1/2	3/4	21/32	4 3/4	6 1/4	7	14	13	10 7/8	2	32 x 24 x 24
RWP-50	RH50-30KW	22 3/4	20 1/8	21	9	12	13 1/2	3/4	21/32	4 3/4	6 1/4	7	14	13	10 7/8	2	32 x 24 x 24
----	RH75-37KW	23 1/8	21 3/4	23 1/8	11 1/4	12 1/4	14	7/8	5/8	4 15/16	7	7 7/8	15 3/4	13 1/4	10 7/8	2 1/2	41 x 30 x 33
----	RH100-55KW	25 7/16	23 3/4	25 7/16	12 1/4	13 3/4	16 5/8	2 1/16	13/16	6 7/16	8	9 1/4	18 1/2	16	10 7/8	3 1/2	41 x 30 x 33