

Reolink Video Doorbell PoE

2K+ 5MP PoE Wired Video Doorbell with Chime

- Chime Included
- 2K+ (5MP) HD Video
- Person Detection

Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS Sensor
Video Resolution	Default: 1920×2560 (5 megapixels) @20FPS
Lens	f=2.26mm F=2.0, with IR cut
VideofORMAT	H.264
Field of View	Horizontal: 100° Vertical: 135° Diagonal: 180°
Pre-Motion Recording	YES
Audio	Two-way audio, noise reduction, echo suppression
Quick Replies	YES
Power	
PoE	IEEE 802.3af, 48V Active
Hardwired	12 – 24VAC 50/60Hz, 24VDC
Interfaces	
Power	Power port

System	Reset button
Ethernet	One 10M/100Mbps RJ45
Storage	microSD card slot (Max. 256GB), works with Reolink NVR
Audio	Built-in two microphones & one speaker
Software	
Frame Rate	Mainstream: 2fps - 20fps (default: 20fps) Substream: 4fps - 15fps (default: 10fps)
Code Rate	Mainstream: 1024Kbps - 6144Kbps (default: 4096Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps)
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection/person detection; visitor notification
Recording Modes	Motion recording (default); 24/7 recording; scheduled recording
Protocols & Standards	HTTPS, IPv4, UPNP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Work with	Google Assistant
Working Environment	
Temperature	Operating temperature: -10°C – +55°C (14°F–131°F)
Humidity	Operating humidity: 10% – 90%
Weatherproof	IP65
Size & Weight	
Dimensions	133mm (H) ×48mm (W) ×23mm (T)
Weight	96g
Warranty	


Limited Warranty

2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>

Gallery & Specs



1. Lens
2. Microphone
3. IR LED
4. Daylight Sensor
5. Button
6. Doorbell Status Light
7. Chime Status Light

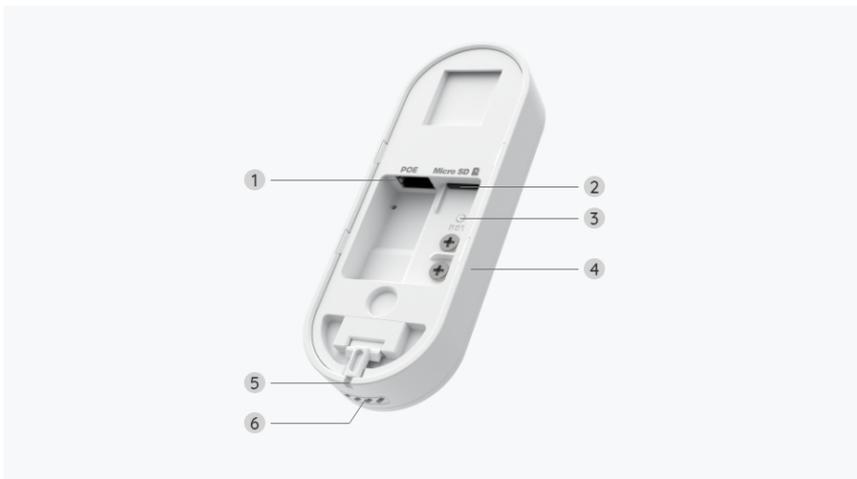

1. PoE Port
2. microSD Card Slot
3. Reset Button
4. Wiring Terminal
5. Pin Hole
6. Speakers



1. Lens
2. Microphone
3. IR LED
4. Daylight Sensor
5. Button
6. Doorbell Status Light
7. Chime Status Light



1. PoE Port
2. microSD Card Slot
3. Reset Button
4. Wiring Terminal
5. Pin Hole
6. Speakers

www.reolink.com