

B-01F

BRIDGING TRANS MODULE



The B-01F is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has a transformer balanced line input with female XLR type connector.

Key features


- For balanced or unbalanced line level sources such as mixer outputs, signal processors and wireless microphone receivers
- Transformer isolation ($10k\Omega$)
- Connector: female XLR

Specifications

* 0 dB=1 V


Input Sensitivity	-18 dB* (Rated output: -20 dB*)
Input Impedance	10 kΩ, balanced transformer-isolated
Frequency Response	20 Hz - 20 kHz ±1.5 dB
Connector	Female XLR connector (XLR-3-31 equivalent)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 110 g (0.24 lb)

Dimensions

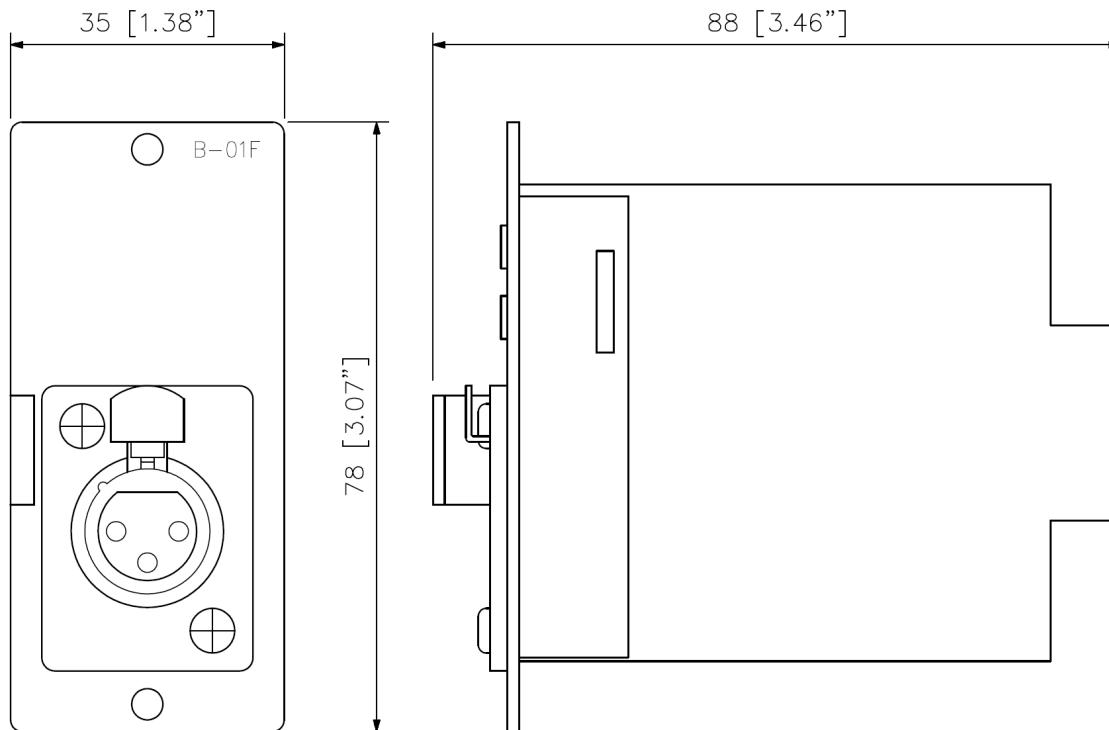

Front View

Side View

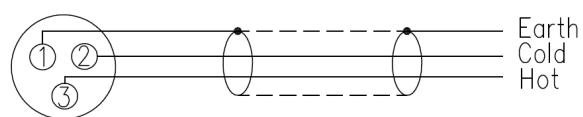

Connection Diagram

UNIT: mm