

## BC-2000A Y

### BATTERY CHARGER



The BC-2000A is a dedicated battery charger for the WM-D5200 Digital wireless microphone and WM-D5300 Digital wireless transmitter. It works with the optional AD-5000-2 AC adapter. The BC-2000A employs a quick charging system for nickel-metal hydride (Ni-MH) batteries, allowing up to 2 units to be fully charged.


### Key features

## Specifications


Power Source	12 V DC (optional AC adapter AD-5000-2 must be used)
Current Consumption	750 mA
Charging Time	Approx. 2 hours
Number of Units to be Charged Simultaneously	2 pieces
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	30 % to 85 %RH (no condensation)
Finish	Case: ABS resin, black, semi-gloss, paint Rechargeable unit receptacle section: PPE resin, black
Dimensions	238 (W) x 108.5 (H) x 98 (D) mm (9.37" x 4.27" x 3.86")
Weight	500 g (1.1 lb)
Optional Accessories	Ni-MH battery: WB-2000-2 (containing 2 pieces) AC adapter: AD-5000-2(*1)

(\*1) If not available in your market, please contact your nearest TOA dealer.


## Dimensions

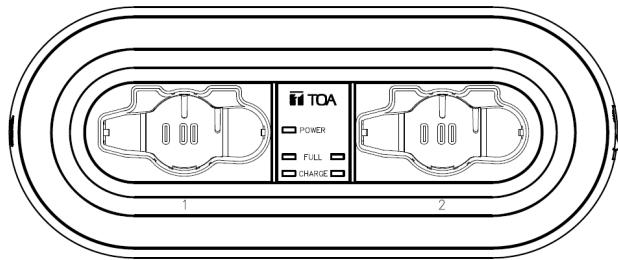


Top View



Left Side View

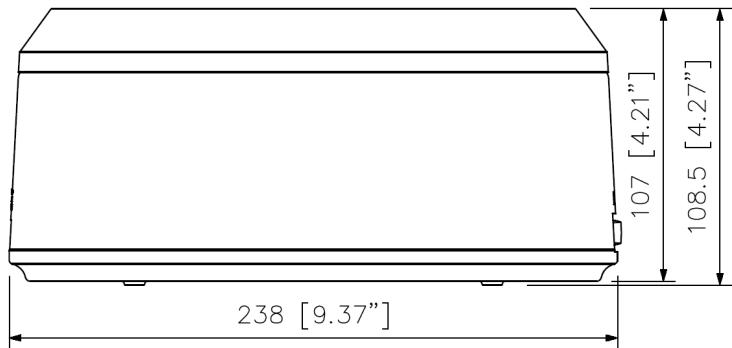

Front View



Right Side View

UNIT: mm