



## AS-Interface value-added automation set for pneumatic quarter-turn actuators


Added Value package AS-i T5

Article to be discontinued

Discontinuation date: 03/31/2026

Alternative articles: AC0023

When selecting an alternative article and accessories please note that technical data may differ!

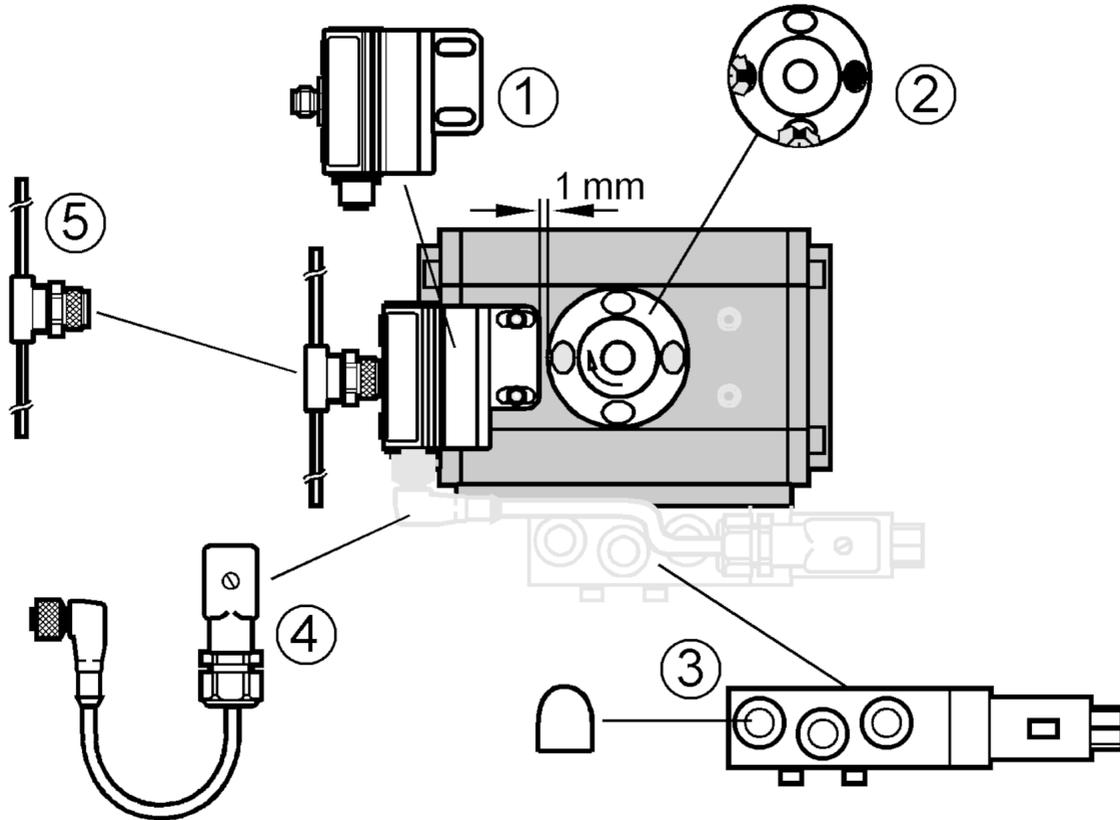

- 1 T5 connection
- 2 target puck Spacer screws
- 3 Single solenoid valve
- 4 Prewired cable to the solenoid valve
- 5 FC insulation displacement connector

### Product characteristics

Output function	PNP
-----------------	-----

### Application

Application	direct open and close valve control
Components	Dual sensor for actuator feedback: 1, AC2316
	Single solenoid valve: 1, ZJF124
	Target puck: 1, E17328
	Silencer: 2, 780780N
	Flat cable insulation displacement connector: 1, E75471
	Connection cable: 1, E10845

### Electrical data

Max. current consumption from AS-i	[mA]	160
Operating voltage AUX DC	[V]	26.5...31.6; (cULus - Class 2 source required)

### Inputs / outputs


Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
------------------------------	---

# AC0020



## AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

Inputs	
Number of digital inputs	2
Outputs	
Number of digital outputs	1
Output function	PNP
AS-i classification	
AS-i version	2.1
AS-i profile	S-7.A.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	A.E
Mechanical data	
Weight [g]	900.95
Mounting	non-flush mountable
Hole spacing [mm]	130
Shaft height of actuator stem [mm]	30
Remarks	
Pack quantity	1 pcs.
Electrical connection	
<b>Electrical connection - Socket</b>	
	
<b>Outputs</b>	
3	External voltage -
4	Switching output 1 +
<b>Electrical connection - plug</b>	
	
<b>Connection</b>	
<b>Connection</b>	
1	AS-i +
3	AS-i -