


DP1613



Relay adapter

Relais Adapter/2xNC

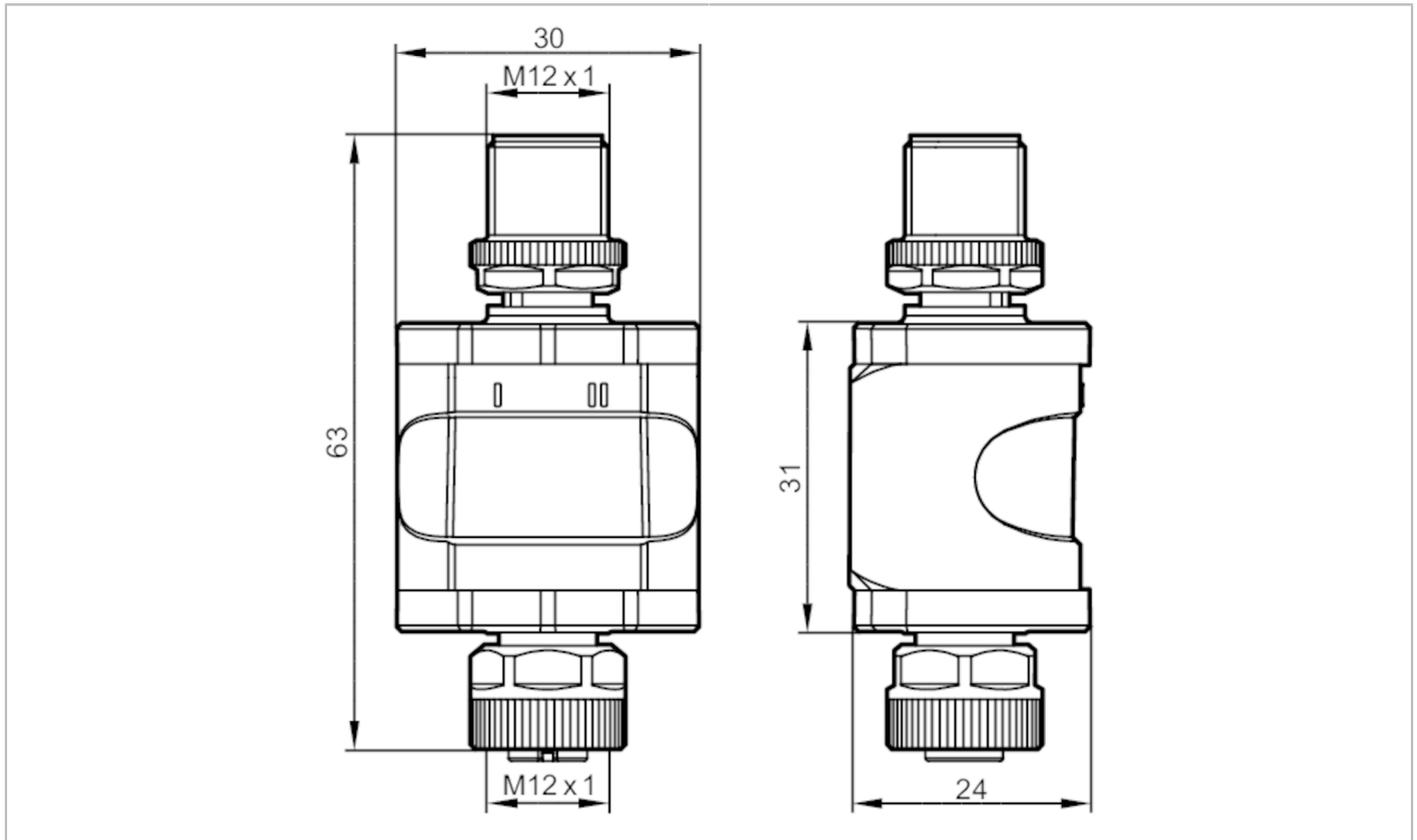

Product characteristics	
Output function	normally closed
Dimensions [mm]	63 x 30 x 24
Electrical data	
Operating voltage [V]	18...30 DC; ((in wet environments: 18...28 V) ; to SELV/PELV)
Nominal voltage DC [V]	24
Current consumption [mA]	< 10
Max. current load total [A]	2
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of relay outputs: 2
Inputs	
Number of digital inputs	2; (type 3 (IEC 61131-2))
Input circuit of digital inputs	PNP
Outputs	
Voltage range DC [V]	0...32; (to SELV/PELV)
Voltage range AC [V]	0...20; ((in wet environments: 0...16 V) ; to SELV/PELV)
Output function	normally closed
Max. current load per output [mA]	1000
Number of relay outputs	2
Switching frequency AC [Hz]	1

DP1613



Relay adapter

Relais Adapter/2xNC

Switching frequency DC [Hz]	1
Notes on switching frequency [Hz]	no capacitive loads

Operating conditions

Ambient temperature [°C]	-25...60
Note on ambient temperature	2000 m: -25...60 °C 3000 m: -25...55 °C 4000 m: -25...52 °C
Storage temperature [°C]	-25...70
Max. relative air humidity [%]	90; (linearly decreasing to 50 % (40 °C) non condensing)
Max. height above sea level [m]	4000
Protection	IP 67
Degree of soiling	2; (before installation and when the device is replaced)

Tests / approvals

MTTF [years]	942
UL approval	Ta max. 55 °C File number UL E205959

Mechanical data

Weight [g]	82.8
Weight (without accessories and packaging) [g]	35
Dimensions [mm]	63 x 30 x 24
Material	housing: PA

Accessories

Accessories (optional)	mounting clip
------------------------	---------------

Remarks

Remarks	Further information is available in the manual. the device complies with overvoltage category II
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M12, straight; coding: A



1: L+	
2: IN1	DI1
3: L-	
4: IN2	DI2

DP1613




Relay adapter

Relais Adapter/2xNC

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A



1: L1 / L+	supply voltage
2: OUT1	Output
3: n.c.	NC1
4: OUT2	NC2
5: n.c.	