


# DV2930



## 20-LED light tower

LED-Tower-20-a/IOL/Buzzer

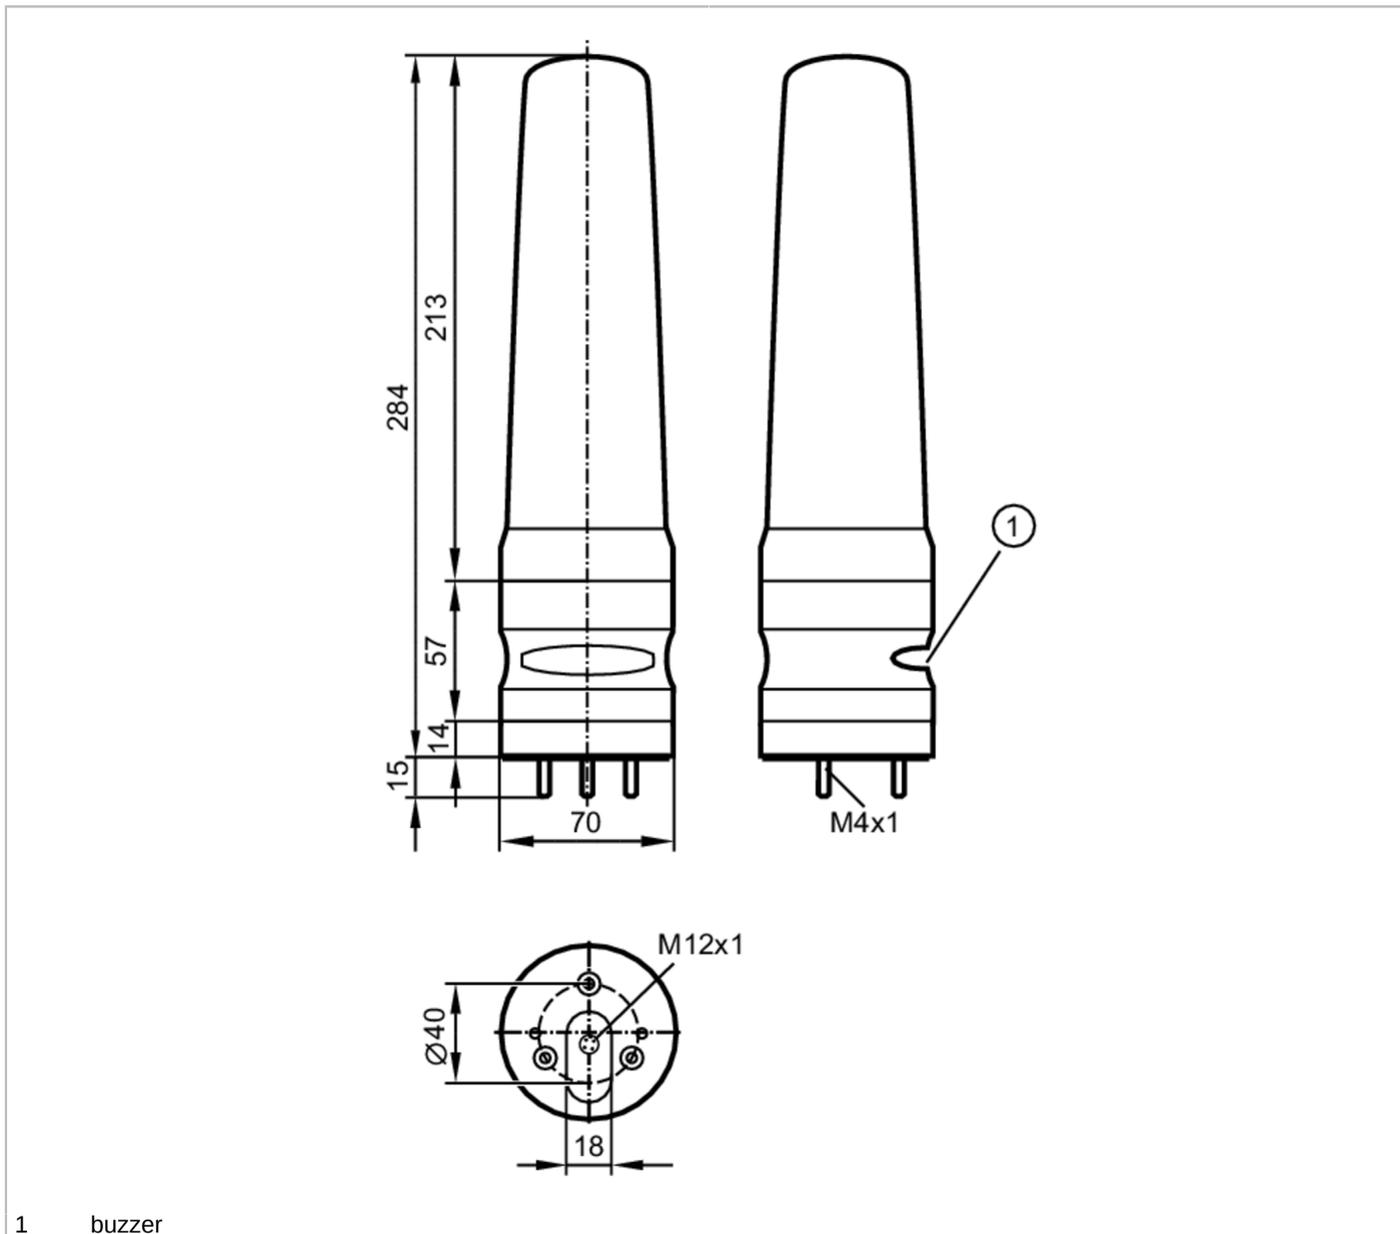

1 buzzer



Application	
Application	signaling machine conditions
Electrical data	
Operating voltage [V]	18...30 DC; (to SELV/PELV ; "supply class 2" to cURus)
Nominal voltage DC [V]	24
Current consumption [mA]	< 200
Switch-on peak current [mA]	500; (2 ms; 400 mA: 50 ms)
Inputs	
Input current High [mA]	6
Interfaces	
Communication interface	IO-Link

# DV2930



## 20-LED light tower

LED-Tower-20-a/IOL/Buzzer

Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Common - I&D	Identification and Diagnosis
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	2.7	
Supported DeviceIDs	<b>Type of operation</b>	<b>DeviceID</b>
	default	1533

Operating conditions		
Ambient temperature [°C]		-25...50
Storage temperature [°C]		-40...75
Max. relative air humidity [%]		90
Air pressure [kPa]		< 106
Max. height above sea level [m]		2000
Protection		IP 54

Tests / approvals		
MTTF [years]		197

Mechanical data		
Weight [g]		493
Dimensions [mm]		Ø 70 / L = 284
Material		housing: ABS; lens: PC

Displays / operating elements		
Display	LED segment	20 x LEDs, multi-color
Acoustic signal		buzzer
Max. sound pressure [dB]		85

Accessories		
Accessories (optional)		mounting base, E89060
		wall bracket, E89061
		Mounting adapter, E89063
		bracket with lateral cable entry, E89064
		mounting tube, E89065
		mounting tube, E89066
		mounting tube, E89067

Remarks		
Remarks	Further information is available in the manual.	
Pack quantity	1 pcs.	

# DV2930



## 20-LED light tower

LED-Tower-20-a/IOL/Buzzer

### Electrical connection - plug


Connector: M12; coding: A



1	UB+
2	not used
3	UB-
4	IO-Link (C/Q)

### Diagrams and graphs

#### Installation

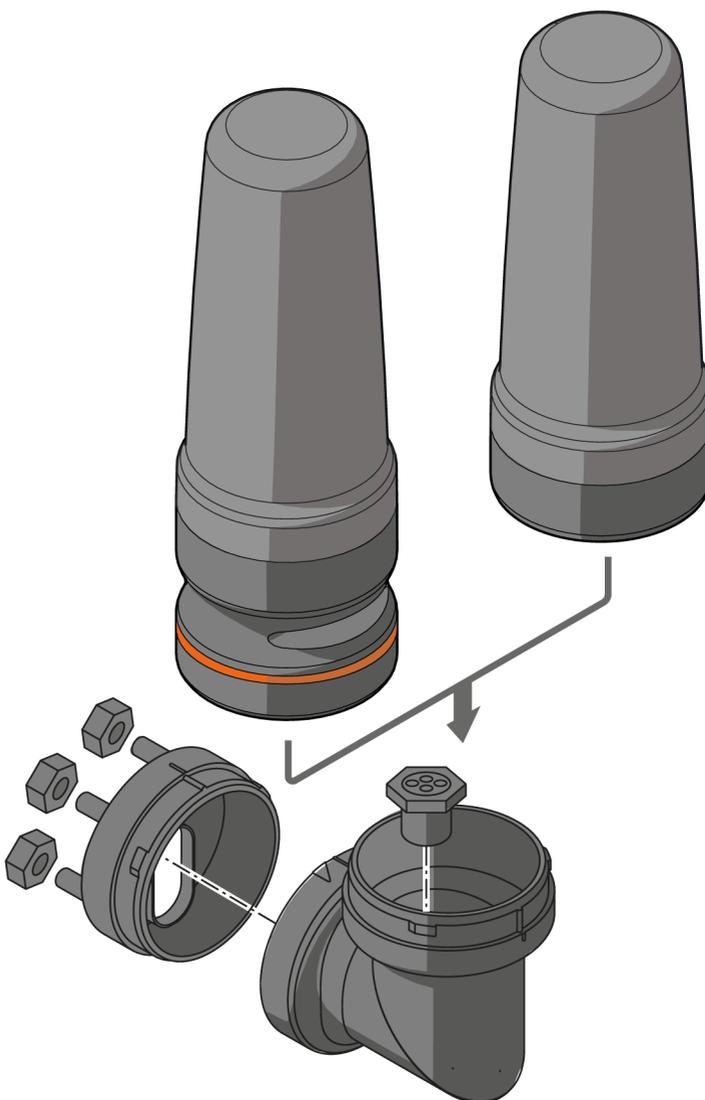


# DV2930

## 20-LED light tower

LED-Tower-20-a/IOL/Buzzer



### Installation

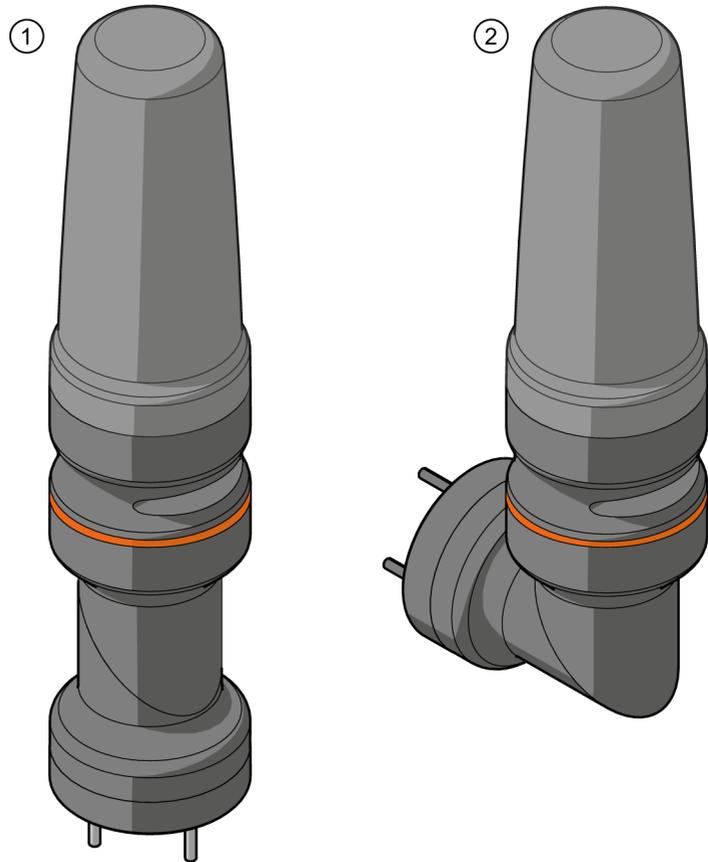

- 1 mounting on a horizontal surface
- 2 mounting on a vertical surface


# DV2930

## 20-LED light tower

LED-Tower-20-a/IOL/Buzzer



base mounting

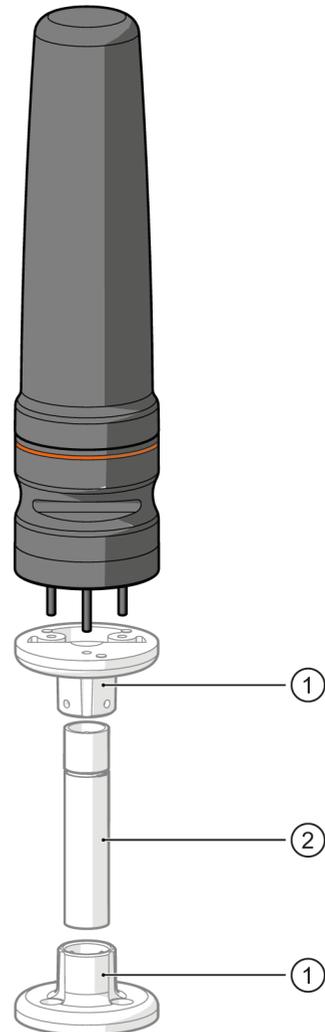

- 1 E89060 not supplied
- 2 E89065, E89066, E89067 not supplied


# DV2930

## 20-LED light tower

LED-Tower-20-a/IOL/Buzzer



wall mounting

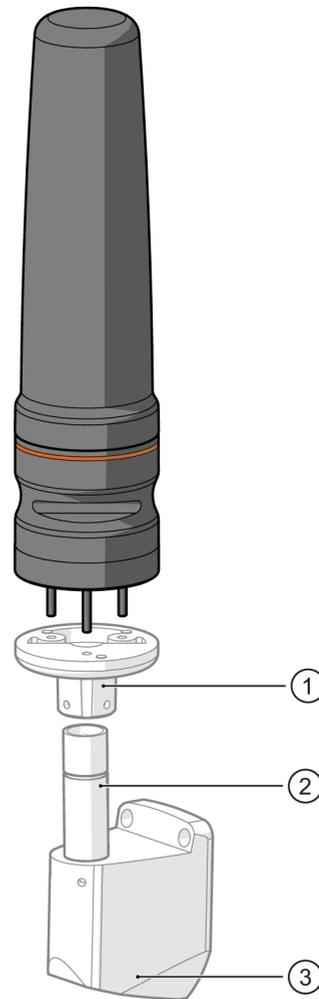

- 1 E89060 not supplied
- 2 E89065, E89066, E89067 not supplied
- 3 E89061 not supplied