


E10821



Patchcords with valve plug

VVDAA040--N00,3E02STAH050VAN

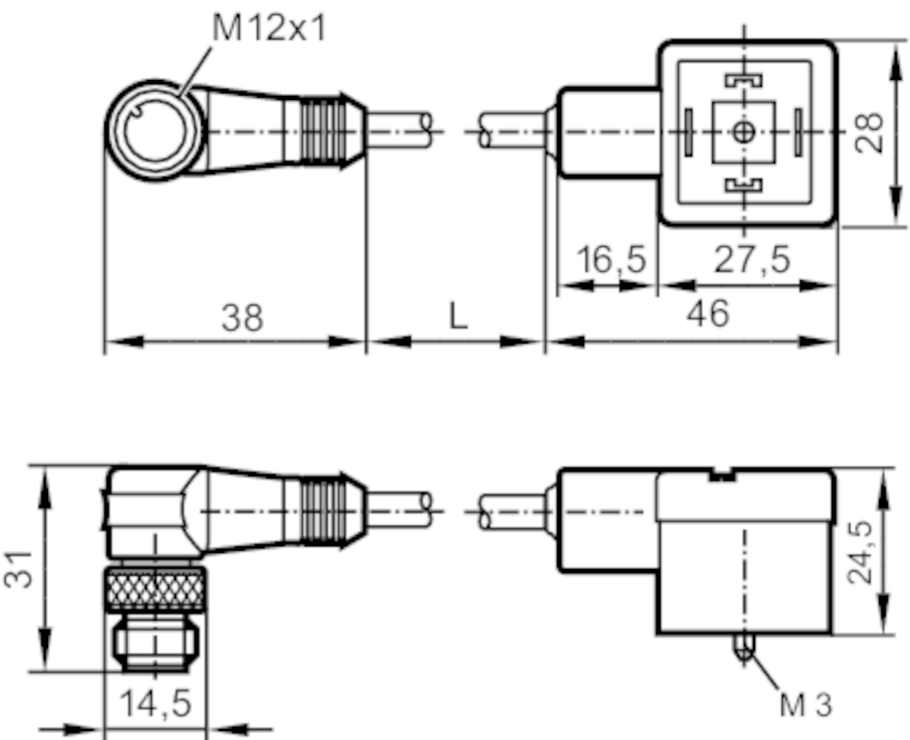

| Application          |      |                                                                                                                   |
|----------------------|------|-------------------------------------------------------------------------------------------------------------------|
| Application          |      | NAMUR                                                                                                             |
| Electrical data      |      |                                                                                                                   |
| Operating voltage    | [V]  | < 30 DC                                                                                                           |
| Operating conditions |      |                                                                                                                   |
| Ambient temperature  | [°C] | -25...90                                                                                                          |
| Protection           |      | IP 67                                                                                                             |
| Mechanical data      |      |                                                                                                                   |
| Weight               | [g]  | 51.9                                                                                                              |
| Dimensions           | [mm] | 31 x 14.5 x 38                                                                                                    |
| Material             |      | TPU (urethane); PUR                                                                                               |
| Molded-body material |      | TPU / PUR                                                                                                         |
| Material nut         |      | stainless steel (1.4404 / 316L)                                                                                   |
| Accessories          |      |                                                                                                                   |
| Items supplied       |      | screw: 1                                                                                                          |
|                      |      | panel for labelling: 1                                                                                            |
| Remarks              |      |                                                                                                                   |
| Remarks              |      | For use in zone 0, group IIB or IIC the user has to avoid intensive electrostatic charge build-up at the sockets. |
| Pack quantity        |      | 1 pcs.                                                                                                            |

# E10821




## Patchcords with valve plug

VVDAA040--N00,3E02STAH050VAN

### Electrical connection - plug


Connector: 1 x M12, angled; coding: A; Moulded body: TPU / PUR; Locking: stainless steel (1.4404 / 316L)



### Electrical connection

Cable: 0.3 m, PVC, blue, Ø 5.1 mm; 2 x 0.5 mm<sup>2</sup>

### Connection



### Electrical connection - Socket

Connector: 1 x valve type A DIN (EN 175301-803), angled; Moulded body: TPU / PUR; Locking: stainless steel (1.4404 / 316L)

