


E11774



Wirable socket

SDOGH050MSSFKPG

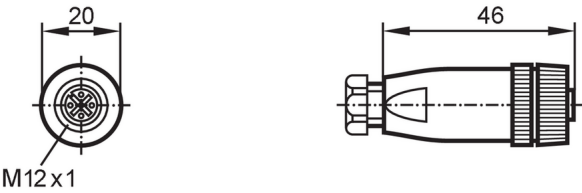


Application		
Special feature		Free from silicone; Gold-plated contacts
Application		Industrial applications / factory automation
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 45 AC / < 70 DC
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-25...100
Protection		IP 68
Mechanical data		
Weight	[g]	29.9
Dimensions	[mm]	20 x 20 x 46
Moulded-body material		PA
Material nut		brass, nickel-plated
Remarks		
Pack quantity		1 pcs.

Electrical connection	
screw terminals: ...0.75 mm²; Cable sheath: Ø 6...8 mm	

Electrical connection - socket	
--------------------------------	--

Connector: 1 x M12, straight; coding: A; Contacts: 5, gold-plated; Moulded body: PA; Locking: brass, nickel-plated



Connection	