


E12341



Female cordset

ADOAH040MSS0030C04

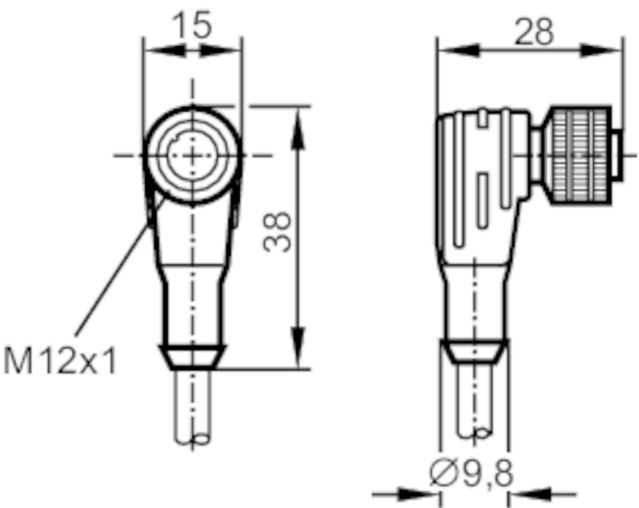

Application		
System		Free from silicone; Halogen-free; gold-plated contacts; screened cable; Drag chain suitability
Application		Industrial applications
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...85
Note on ambient temperature		21 days: ...120
Protection		IP 67
Mechanical data		
Weight	[g]	1479
Dimensions	[mm]	28 x 15 x 38
Molded-body material		TPU (urethane)
Material nut		diecast zinc
Drag chain suitability		yes
Drag chain suitability	Bending radius	min. 10 x cable diameter
Remarks		
Pack quantity		1 pcs.

E12341



Female cordset

ADOAH040MSS0030C04

Electrical connection


Cable: 30 m, PUR, Halogen-free, black, Ø 5 mm, screened; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - Socket

Connector: 1 x M12, angled; coding: A; Moulded body: TPU (urethane); Locking: diecast zinc; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: shield not connected



Connection

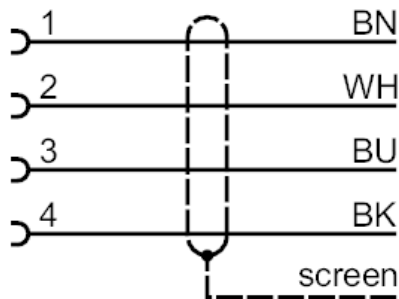

Core colors :
BK = black
BN = brown
BU = blue
WH = white