




Fiber optic through beam sensor

FE-11-EPA-M4/F1X0,5/2M

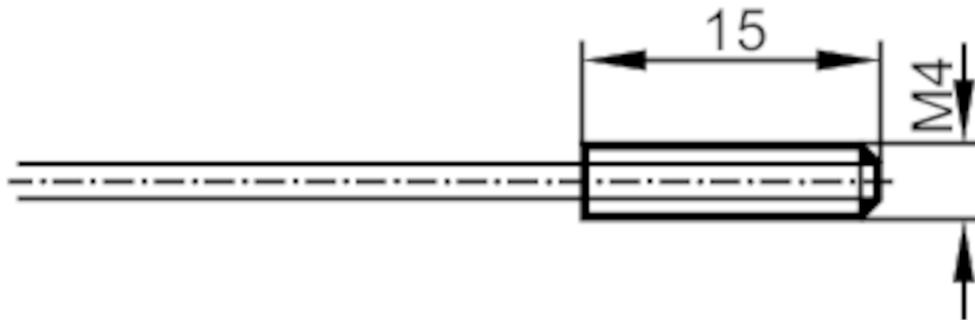

Application		
Function principle		Through-beam sensor
Application		Small bending radius
Monitoring range		
Range with fiber optic amplifier type		OB50; OBF; OCF; OO50
OB50		
Range of fiber optics	[mm]	60
OBF		
Range of fiber optics	[mm]	60
OCF (High Power)		
Range of fiber optics	[mm]	2160
OO50		
Range of fiber optics	[mm]	160
Operating conditions		
Ambient temperature	[°C]	-40...70
Mechanical data		
Weight	[g]	35
Version of sensing head		straight
Sensing head thread		M4

E20612



Fiber optic through beam sensor

FE-11-EPA-M4/F1X0,5/2M

Sensing head length	[mm]	15
Total length	[mm]	2000
Min. bending radius	[mm]	10
Fiber arrangement		●
Core diameter	[mm]	0.5
Fiber material		PMMA
Fiber head material		aluminum
Fiber sheath material		PE

Accessories

Items supplied	Hexagon nuts: 4 x M4
	tooth lock washers: 4
	Adapter: 1 x OBF
	Adapter: 1 x OCF
Accessories (optional)	Adapter: 1 x OOF
	Cutter for fibers:, E20600

Remarks

Pack quantity	1 pcs.
---------------	--------