




## Process adapter sanitary pipe fitting

ADAPT IFM-DIN11851 DN32/1.25"

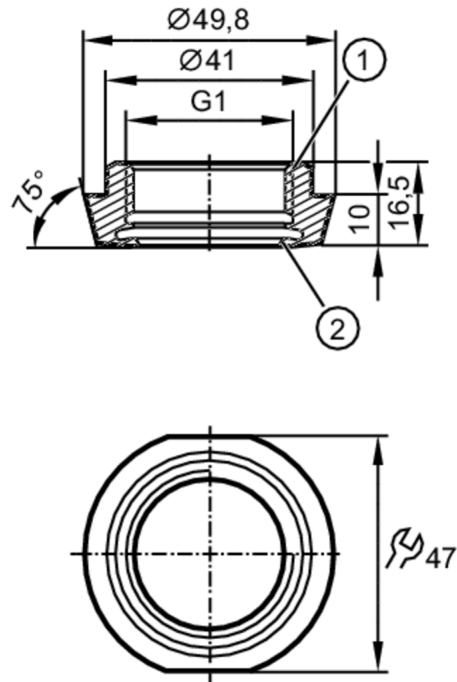

- 1 Aseptoflex Vario  
2 sealing area

CRN EC 1935/2004 FCM FDA

| Application                              |                                                                                                               |       |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------|
| Pressure rating                          | 40 bar                                                                                                        | 4 MPa |
| MAWP (for applications according to CRN) | 40 bar                                                                                                        | 4 MPa |
| Tests / approvals                        |                                                                                                               |       |
| Pressure equipment directive             | A possible classification to PED depends on the application and has to be carried out by the user / operator. |       |
| Safety instructions                      | The compatibility between medium and product material has to be checked in all applications.                  |       |
| Mechanical data                          |                                                                                                               |       |
| Weight                                   | [g]                                                                                                           | 134   |
| Materials (wetted parts)                 | stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm                              |       |
| Sensor connection                        | G 1 Internal thread Aseptoflex Vario                                                                          |       |
| Process connection                       | Hygienic pipe fitting DN32 (1,25") Ø 49.8 mm DIN 11851                                                        |       |
| Sealing                                  | Gasket                                                                                                        |       |
| Hygienic equipment class to DIN 11866    | H4                                                                                                            |       |
| Accessories                              |                                                                                                               |       |
| Items supplied                           | O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054                                                          |       |
| Accessories (optional)                   | O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123                                                                |       |
|                                          | sealing ring: 1, PEEK, FDA compliant, E30124                                                                  |       |
| Remarks                                  |                                                                                                               |       |
| Pack quantity                            | 1 pcs.                                                                                                        |       |