




Welding adapters EN10357 series C (ASME BPE)

ADAPT EN10357-C DN40

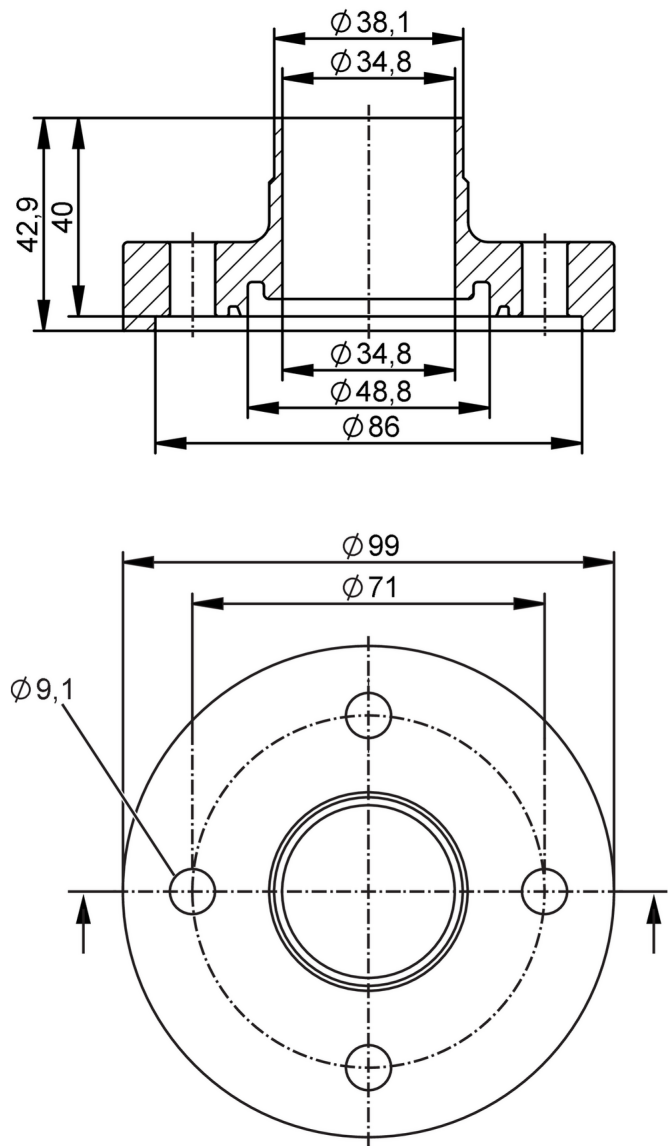

Application		
Design	for flow meter SMF	
Application	food and beverage industry; hygienic systems	
Pressure rating	40 bar	4 MPa
MAWP (for applications according to CRN) [MPa]	4	
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight [g]	2382	
Housing	tubular	

E40622



Welding adapters EN10357 series C (ASME BPE)

ADAPT EN10357-C DN40

Dimensions	[mm]	Ø 99 / L = 42.9
Materials (wetted parts)		stainless steel (1.4404 / 316L)
Nominal diameter		DN40 (1 1/2")
Sensor connection		ifm-specific device flange
Process connection		Welding adapter EN10357 series C (ASME BPE)
Process connection suitable for pipe standard		(DIN EN 10357 series C); (DIN 11866 series C); (BS 4825 Part 1); (ISO 2037)
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.4 µm
Accessories		
Items supplied		screws 8
Remarks		
Remarks		MAWP (for applications according to CRN) with VMQ sealing ring E40572, 3.4 MPa applies
Pack quantity		2 pcs.