


IG6621



Inductive analog sensor

IGK3008A1PKG/0,2M/PUR

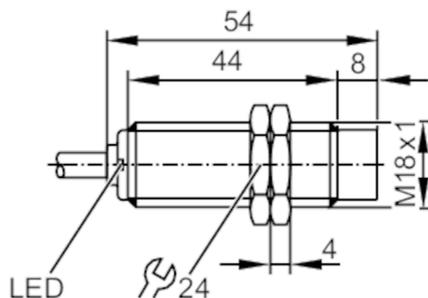

Product characteristics

Housing		Threaded type
Dimensions	[mm]	M18 x 1 / L = 54

Electrical data

Operating voltage	[V]	15...30 DC
Current consumption	[mA]	< 20
Protection class		II
Reverse polarity protection		yes

Outputs

Analog current output	[mA]	4...20; (linear; gradient: 2,22 mA/mm; for frontal approach and for target made of mild steel: 24 x 24 x 1 mm)
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes

Monitoring range

Measuring range	[mm]	0.8...8
-----------------	------	---------

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Linearity error of analog output	[%]	± 1 %; (of IA max)
Repeatability analog output	[%]	± 1 %; (of IA max)

Reaction times

Response time	[ms]	< 10
---------------	------	------

Operating conditions

Ambient temperature	[°C]	-40...80
Protection		IP 67

Tests / approvals

MTTF	[years]	952
------	---------	-----

Mechanical data

Weight	[g]	79.06
Housing		Threaded type

IG6621



Inductive analog sensor

IGK3008A1PKG/0,2M/PUR

Mounting	non-flush mountable
Dimensions [mm]	M18 x 1 / L = 54
Thread designation	M18 x 1
Material	housing: brass white bronze coated; sensing face: PBT

Displays / operating elements

Display	target in measuring range	yellow lights
	target outside measuring range	yellow flashing

Accessories

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 0.2 m, PUR, Ø 4 mm; burning behaviour to ECE R118 rev. 2; 3 x 0.50 mm²
; flame-retardant (IEC 60332-2, UL: FT2)

Connection

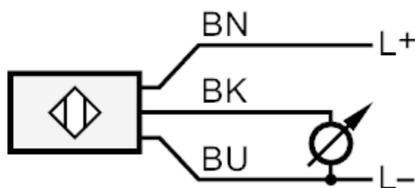

Core colors :
BK = black
BN = brown
BU = blue