


KI5209



Capacitive sensor

KI-3015-FPKG/NI/0,10M/PH/US100

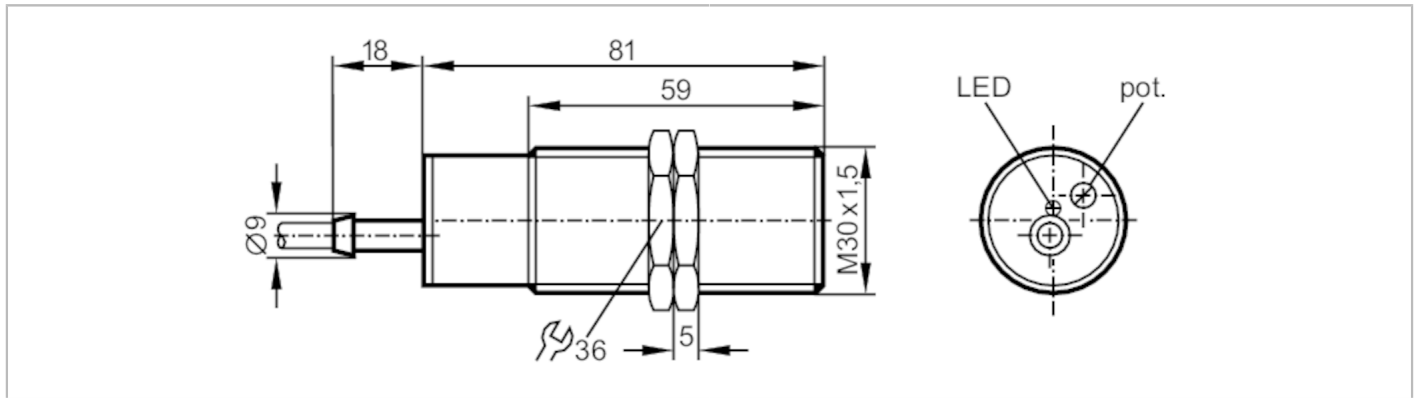

Product characteristics	
Electrical design	PNP
Output function	normally open / closed; (selectable)
Sensing range [mm]	3...15
Housing	Threaded type
Dimensions [mm]	M30 x 1.5 / L = 81
Electrical data	
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 15
Protection class	II
Reverse polarity protection	yes
Outputs	
Electrical design	PNP
Output function	normally open / closed; (selectable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Short-time current rating of switching output [mA]	250
Switching frequency DC [Hz]	40
Short-circuit proof	yes
Overload protection	yes
Monitoring range	
Sensing range [mm]	3...15
Sensing range adjustable	yes
Factory setting sensing range [mm]	15
Real sensing range Sr [mm]	15 ± 10 %
Operating distance [mm]	0...12.1
Accuracy / deviations	
Correction factor	glass: 0.4 / water: 1 / ceramics: 0.2 / PVC: 0.2
Hysteresis [% of Sr]	1...15

KI5209



Capacitive sensor

KI-3015-FPKG/NI/0,10M/PH/US100

Switch-point drift	[% of Sr]	-15...15
--------------------	-----------	----------

Operating conditions

Ambient temperature	[°C]	-25...80
---------------------	------	----------

Protection		IP 65
------------	--	-------

Tests / approvals

MTTF	[years]	692
------	---------	-----

Mechanical data

Weight	[g]	102.5
--------	-----	-------

Housing		Threaded type
---------	--	---------------

Mounting		non-flush mountable
----------	--	---------------------

Dimensions	[mm]	M30 x 1.5 / L = 81
------------	------	--------------------

Thread designation		M30 x 1.5
--------------------	--	-----------

Material		PBT
----------	--	-----

Displays / operating elements

Display	Switching status	1 x LED, red
---------	------------------	--------------

Accessories

Items supplied		lock nuts: 2
----------------	--	--------------

		screwdriver: 1
--	--	----------------

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection - plug

Cable: 0.1 m, PUR

Connector: 1 x M12; coding: A

