


NF5003



Inductive NAMUR sensor

IF-2004-N/1D/1G



Product characteristics

Electrical design	NAMUR
Output function	normally closed
Sensing range [mm]	4
Housing	Threaded type
Dimensions [mm]	M12 x 1 / L = 30

Electrical data

Connection at circuit amplifier	yes
Switching amplifiers	connection to certified intrinsically safe circuits with the max. values: U = 15 V / I = 50 mA / P = 120 mW
Nominal voltage DC [V]	8.2; (1kΩ)
Supply voltage DC [V]	7.5...30; (when used outside the hazardous area)
Current consumption [mA]	< 1; (disabled; conductive: > 2,1)
Protection class	III

Outputs

Electrical design	NAMUR
Output function	normally closed
Permanent current rating of switching output DC [mA]	30; (when used outside the hazardous area)
Switching frequency DC [Hz]	1500

Monitoring range

Sensing range [mm]	4
Real sensing range Sr [mm]	4 ± 10 %

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Operating conditions

Ambient temperature [°C]	-20...80
Protection	IP 67

Tests / approvals

Approval	PTB 01 ATEX 2191; BVS 04 ATEX E 153 X; IECEx BVS 06.0003X; TIIS TC16107
ATEX marking	Ex II 1G Ex ia IIC T6 Ga Ta -20...70°C

NF5003



Inductive NAMUR sensor

IF-2004-N/1D/1G

	Ex II 1G Ex ia IIC T5 Ga Ta -20...80°C
	Ex II 1D Ex ia IIIC T200 90°C Da Ta: -20...70°C
	Ex II 1D Ex ia IIIC T200 100° C Da Ta: -20...80°C
EMC	EN 60947-5-6
Shock/vibration resistance	30 g (11 ms) / 10-55 Hz (1 mm)
MTTF [years]	4736

Safety classification

Max. internal capacitance [nF]	140
Max. internal inductance [µH]	130

Mechanical data

Weight [g]	121.5
Housing	Threaded type
Mounting	non-flush mountable
Dimensions [mm]	M12 x 1 / L = 30
Thread designation	M12 x 1
Material	PBT

Accessories

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PVC; 2 x 0.34 mm²

Connection

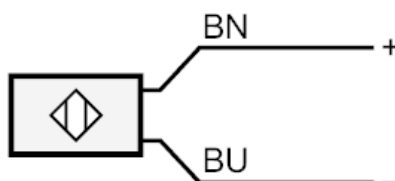

Core colors :
 BN = brown
 BU = blue