


NS5002



Inductive NAMUR sensor

IS-2002-N/OLED/1D/1G

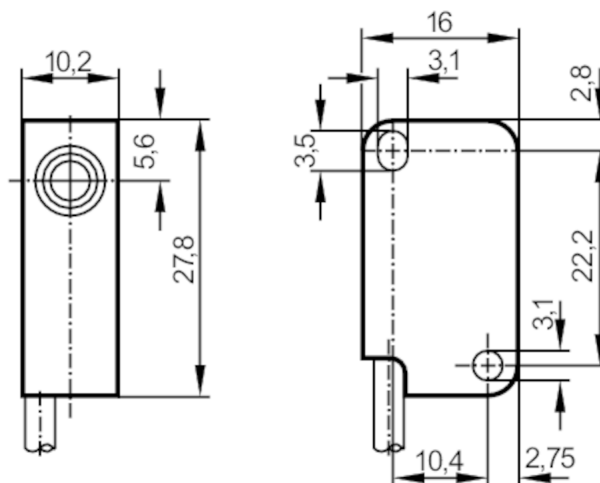

Product characteristics

Electrical design	NAMUR
Output function	normally closed
Sensing range [mm]	2
Housing	rectangular
Dimensions [mm]	28 x 10 x 16

Electrical data

Connection at circuit amplifier	yes
Switching amplifiers	connection to certified intrinsically safe circuits with the max. values: U = 15 V / I = 50 mA / P = 120 mW
Nominal voltage DC [V]	8.2; (1k Ω)
Supply voltage DC [V]	7.5...30; (when used outside the hazardous area)
Current consumption [mA]	< 1; (disabled; conductive: > 2,1)

Outputs

Electrical design	NAMUR
Output function	normally closed
Permanent current rating of switching output DC [mA]	30; (when used outside the hazardous area)
Switching frequency DC [Hz]	800

Monitoring range

Sensing range [mm]	2
Real sensing range Sr [mm]	2 $\pm$ 10 %

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Operating conditions

Ambient temperature [°C]	-20...70
--------------------------	----------


NS5002



Inductive NAMUR sensor

IS-2002-N/OLED/1D/1G

Protection	IP 67	
Tests / approvals		
Approval	PTB 01 ATEX 2191; BVS 04 ATEX E 153 X; IECEX BVS 06.0003X	
ATEX marking	Ⓔ II 1G Ex ia IIB T6 Ga Ta -20...70°C	
	Ⓔ II 1G Ex ia IIB T5 Ga Ta -20...80°C	
	Ⓔ II 2G Ex ia IIC T6 Gb Ta -20...70°C	
	Ⓔ II 2G Ex ia IIC T5 Gb Ta -20...80°C	
	Ⓔ II 1D Ex ia IIIC T200 90°C Da Ta: -20...70°C	
	Ⓔ II 1D Ex ia IIIC T200 100° C Da Ta: -20...80°C	
EMC	EN 60947-5-6	
Shock/vibration resistance	30 g (11 ms) / 10-55 Hz (1 mm)	
MTTF [years]	4776	
Safety classification		
Max. internal capacitance [nF]	80	
Max. internal inductance [µH]	110	
Mechanical data		
Weight [g]	85	
Housing	rectangular	
Mounting	flush mountable	
Dimensions [mm]	28 x 10 x 16	
Material	PBT	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 2 m, PVC; 2 x 0.14 mm²		
Connection		

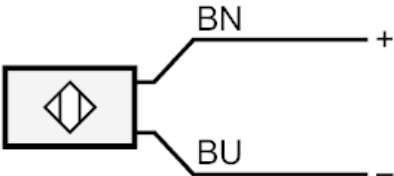

BN = Core colors :
brown
BU = blue