


SM6050



Magnetic-inductive flow meter

SMR12GGX10KG/US-100

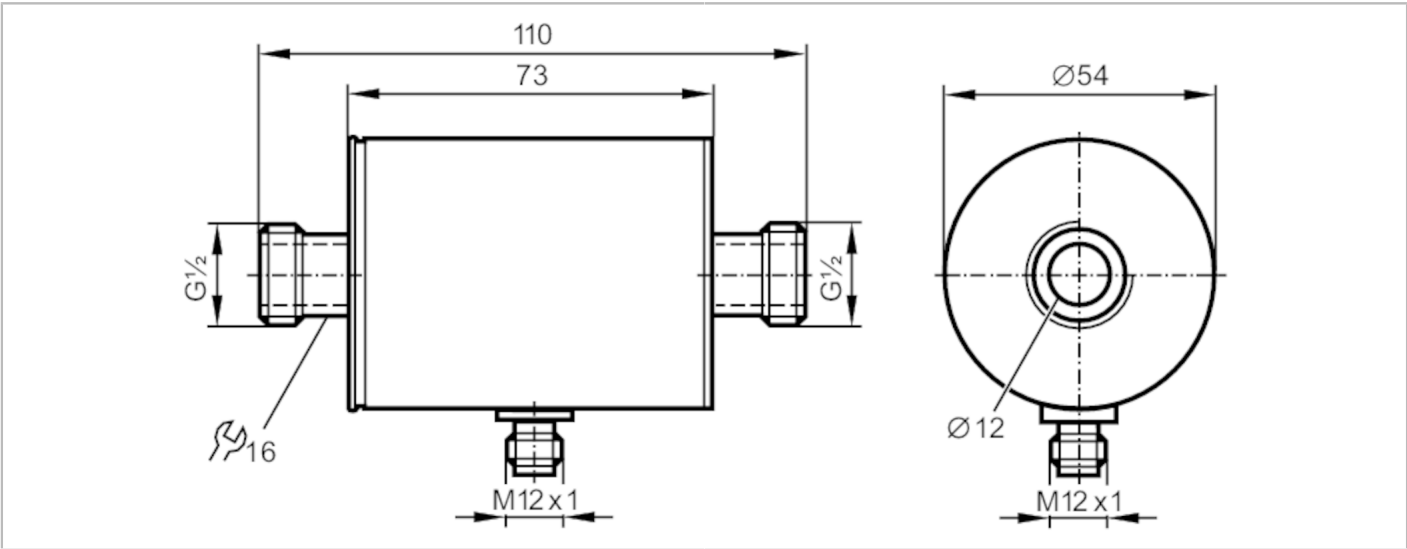

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1
Measuring range [l/min]	0.1...25
Process connection	threaded connection G 1/2 external thread DN15 flat seal

Application

System	gold-plated contacts
Application	for industrial applications
Installation	connection to pipe by means of an adapter
Media	Conductive liquids; water; water-based media
Note on media	conductivity: $\geq 20 \mu\text{S/cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C)
Medium temperature [°C]	-10...70
Pressure rating	16 bar 1.6 MPa
MAWP (for applications according to CRN)	15.3 bar 1.53 MPa

Electrical data

Operating voltage [V]	18...30 DC; (to SELV/PELV)
Current consumption [mA]	95; (24 V)
Min. insulation resistance [MΩ]	100; (500 V DC)
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	5
Measuring principle	magnetic-inductive

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1
------------------------------	-----------------------------

Outputs

Total number of outputs	1
Output signal	analog signal; IO-Link; (configurable)



Magnetic-inductive flow meter

SMR12GGX10KG/US-100

Permanent current rating of switching output DC	[mA]	250
Number of analog outputs		1
Analog current output	[mA]	4...20
Max. load	[Ω]	500
Overload protection		yes

Measuring/setting range

Measuring range	[l/min]	0.1...25
-----------------	---------	----------

Accuracy / deviations

Flow monitoring		
Accuracy (in the measuring range)		± (0,8 % MW + 0,5 % MEW)
Repeatability		± 0,2% MEW

Reaction times

Flow monitoring		
Response time	[s]	0.15; (dAP = 0, T19)
Temperature monitoring		
Dynamic response T05 / T09	[s]	T09 = 20 (Q > 1 l/min)

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode	yes	
Required master port class	A	
Process data analog	2	
Min. process cycle time	[ms]	5
Supported DeviceIDs	Type of operation	DeviceID
	default	571

Operating conditions

Ambient temperature	[°C]	-10...60
Storage temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC	DIN EN 60947-5-9	
CPA approval	model number	001MI
	accuracy class	-
	maximum allowable error	± 1,5 % FS
	Q (min)	0,005 m³/h
	Q (t)	-
	Q (max)	1,5 m³/h

SM6050



Magnetic-inductive flow meter

SMR12GGX10KG/US-100


Shock resistance	DIN IEC 68-2-27	20 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	5 g (10...2000 Hz)
MTTF [years]	167	
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]	480.6	
Housing	tubular	
Inlet pipe length	5 x DN	
Outlet pipe length	2 x DN	
Dimensions [mm]	Ø 54 / L = 110	
Material	stainless steel (1.4404 / 316L); PBT-GF20; FKM; TPE	
Materials (wetted parts)	stainless steel (1.4404 / 316L); PEEK; FKM	
Process connection	threaded connection G 1/2 external thread DN15 flat seal	


Remarks		
Remarks	MW = Measured value	
	MEW = Final value of the measuring range	
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

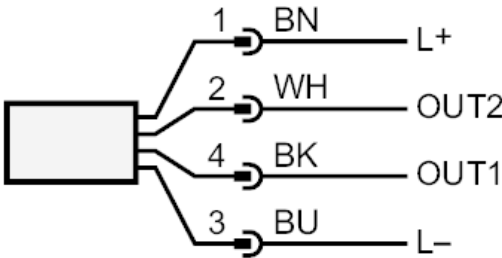

OUT1:	Colors to DIN EN 60947-5-2
OUT2:	IO-Link
	analog output
	Core colors :
BN =	brown
WH =	white
BK =	black
BU =	blue

SM6050




Magnetic-inductive flow meter

SMR12GGX10KG/US-100

Diagrams and graphs

Pressure loss

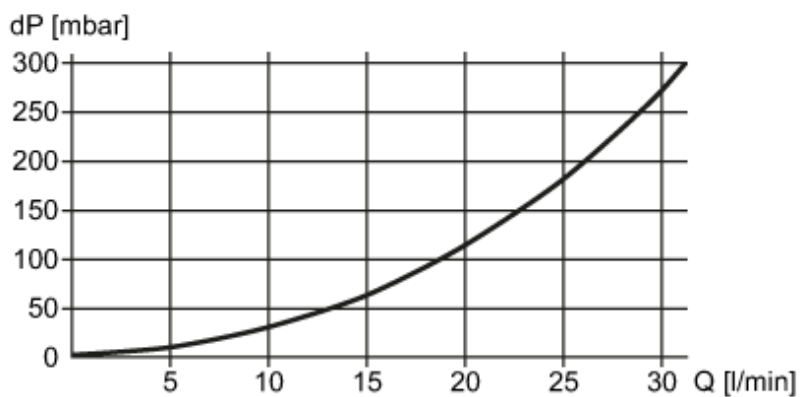

dP Pressure loss

Q volumetric flow quantity