

SM8120




Magnetic-inductive flow meter

SMR11XGXFRKG/US-100

Alternative articles: SM8100

When selecting an alternative article and accessories please note that technical data may differ!

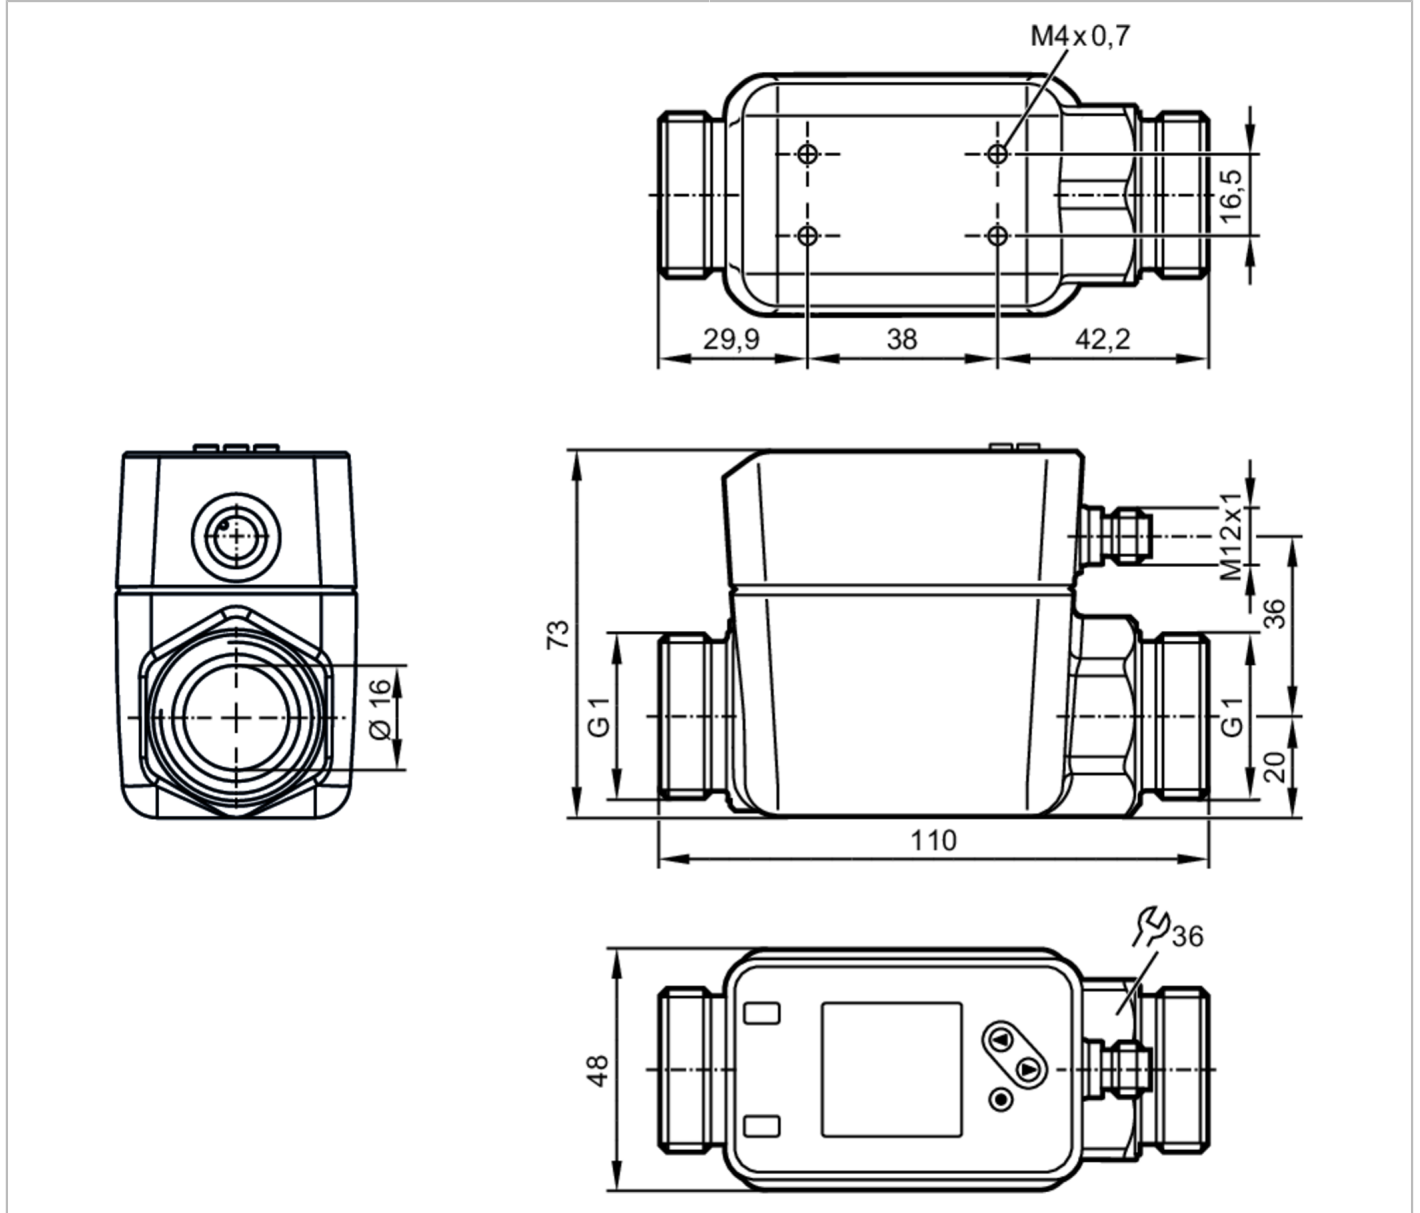

Product characteristics	
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1
Measuring range	0.2...150 l/min 0.012...9 m ³ /h 3.6...2376 gph 0.06...39.6 gpm
Process connection	threaded connection G 1 external thread DN25 flat seal
Application	
System	gold-plated contacts
Media	Conductive liquids; water; water-based media
Note on media	conductivity: $\geq 20 \mu\text{S}/\text{cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C)
Medium temperature	[°C] -20...90

SM8120



Magnetic-inductive flow meter

SMR11XGXFRKG/US-100

Pressure rating	16 bar	1.6 MPa		
Electrical data				
Operating voltage [V]	18...30 DC; (to SELV/PELV)			
Current consumption [mA]	< 80			
Protection class	III			
Reverse polarity protection	yes			
Power-on delay time [s]	5			
Measuring principle	magnetic-inductive			
Inputs / outputs				
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1			
Inputs				
Inputs	counter reset			
Outputs				
Total number of outputs	2			
Output signal	switching signal; analog signal; pulse signal; IO-Link; frequency signal; (configurable)			
Electrical design	PNP/NPN			
Number of digital outputs	2			
Output function	normally open / closed; (configurable)			
Max. voltage drop switching output DC [V]	2			
Permanent current rating of switching output DC [mA]	100			
Number of analog outputs	1			
Analog current output [mA]	4...20; (scalable)			
Max. load [Ω]	500			
Pulse output	flow rate meter			
Short-circuit protection	yes			
Type of short-circuit protection	yes (non-latching)			
Overload protection	yes			
Measuring/setting range				
Measuring range	0.2...150 l/min	0.012...9 m ³ /h	3.6...2376 gph	0.06...39.6 gpm
Display range	-180...180 l/min	-10.8...10.8 m ³ /h	-2853.6...2853.6 gph	-47.56...47.56 gpm
Resolution	0.1 l/min	0.006 m ³ /h	0.6 gph	0.01 gpm
Set point SP	1...150 l/min	0.06...9 m ³ /h	16.2...2376 gph	0.27...39.6 gpm
Reset point rP	0.2...149.2 l/min	0.012...8.95 m ³ /h	3.6...1903 gph	0.06...39.42 gpm
Analog start point ASP	0...120 l/min	0...7.2 m ³ /h	0...1903 gph	0...31.71 gpm
Analog end point AEP	30...150 l/min	1.8...9 m ³ /h	475...2376 gph	7.92...39.6 gpm
Low flow cut-off LFC	0.2...7.5 l/min	0.012...0.45 m ³ /h	3...118.4 gph	0.05...1.98 gpm
Frequency end point, FEP	30.2...150 l/min	1.8...9 m ³ /h	480...2376 gph	8...39.6 gpm
Frequency at the end point FRP [Hz]	1...10000			
Volumetric flow quantity monitoring				
Pulse length [s]	0.002...2			
Pulse value	0.01...99990000 l			

SM8120



Magnetic-inductive flow meter

SMR11XGXFRKG/US-100

Temperature monitoring		
Measuring range	[°C]	-20...90
Display range	[°C]	-42...112
Resolution	[°C]	0.1
Set point SP	[°C]	-19.6...90
Reset point rP	[°C]	-20...89.6
Analog start point	[°C]	-20...68
Analog end point	[°C]	2...90
In steps of	[°C]	0.1
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)		$\pm (0,8 \% MW + 0,2 \% MEW)$
Repeatability		$\pm 0,2 \% MEW$
Temperature monitoring		
Accuracy	[K]	$\pm 2,5 (Q > 5 \% MEW)$
Reaction times		
Flow monitoring		
Start-up delay	[s]	0...50
Response time	[s]	$< 0,25; (dAP = 0, T09)$
Damping process value dAP	[s]	0...5
Temperature monitoring		
Response time	[s]	15; $(Q > 10 \% MEW, T09)$
Software / programming		
Parameter setting options		hysteresis / window; normally open / closed; switching logic; Frequency output; current/pulse output; Start-up delay; display can be deactivated; Display unit
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles	Common - I&D	Identification and Diagnosis
	Function	Measurement data, standard resolution
SIO mode		yes
Required master port class		A
Process data analog		3
Process data binary		2
Min. process cycle time	[ms]	8
Supported DeviceIDs	Type of operation	DeviceID
	default	961
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...80
Protection		IP 65; IP 67

SM8120



Magnetic-inductive flow meter

SMR11XGXFRKG/US-100

Tests / approvals		
EMC	DIN EN 60947-5-9	
CPA approval	model number	006MI
	accuracy class	-
	maximum allowable error	$\pm 1,0$ % FS
	Q (min)	0,01 m ³ /h
	Q (t)	-
	Q (max)	9 m ³ /h
Shock resistance	DIN IEC 68-2-27	20 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	5 g (10...2000 Hz)
MTTF [years]		114
UL approval	UL approval number	I014
	File number UL	E174189
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]		787.5
Housing		rectangular
Dimensions [mm]		110 x 48 x 73
Material	stainless steel (1.4408/316); stainless steel (1.4404 / 316L); PC; PBT+PC-GF30	
Materials (wetted parts)	Pipe section: stainless steel (1.4404 / 316L); Process connection sealing: NBR fiber-reinforced Gasket; PEEK; EPDM; carbon fiber PEEK	
Process connection	threaded connection G 1 external thread DN25 flat seal	

Displays / operating elements		
Display		Color display 1,44", 128 x 128 pixels
		2 x LED, yellow

Remarks		
Remarks		MW = Measured value
		MEW = Final value of the measuring range
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated




SM8120



Magnetic-inductive flow meter

SMR11XGXFRKG/US-100

Connection

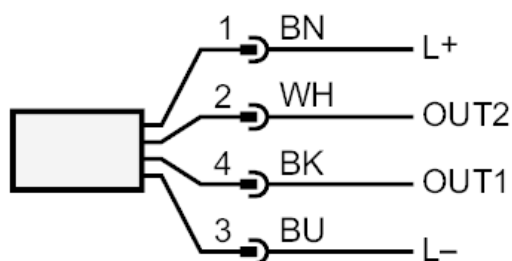

OUT1:	Colors to DIN EN 60947-5-2 Switching output Volumetric flow quantity monitoring Switching output Temperature monitoring Pulse output quantity meter Frequency output volumetric flow monitoring Frequency output Temperature monitoring signal output Preset counter IO-Link
OUT2:	Switching output Volumetric flow quantity monitoring Switching output Temperature monitoring analog output flow analog output temperature Input counter reset Core colors :
BK =	black
BN =	brown
BU =	blue
WH =	white


SM8120

Magnetic-inductive flow meter

SMR11XGXFRKG/US-100



Diagrams and graphs

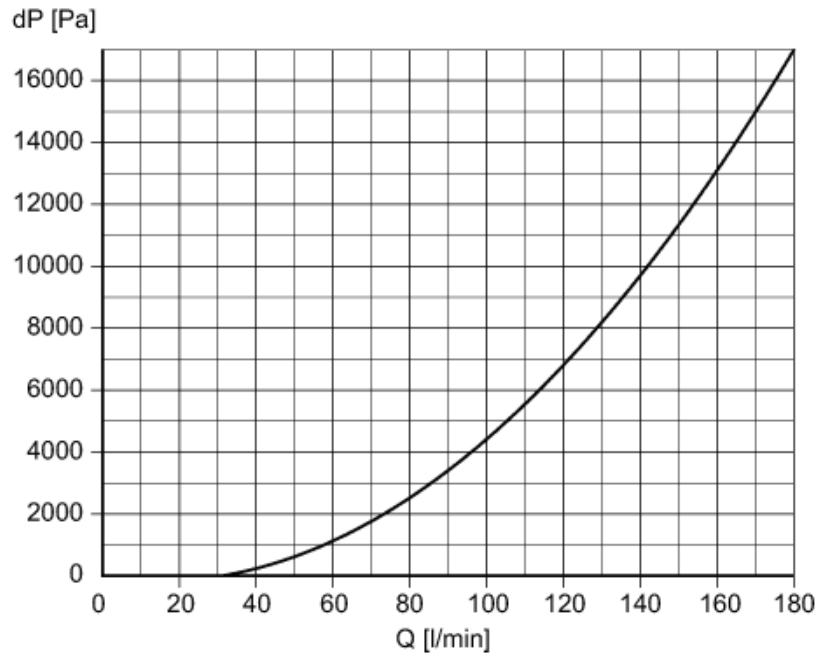

Pressure loss / volumetric flow quantity