


SU6030



Ultrasonic flow meter

SUR12XFBFRKG/US

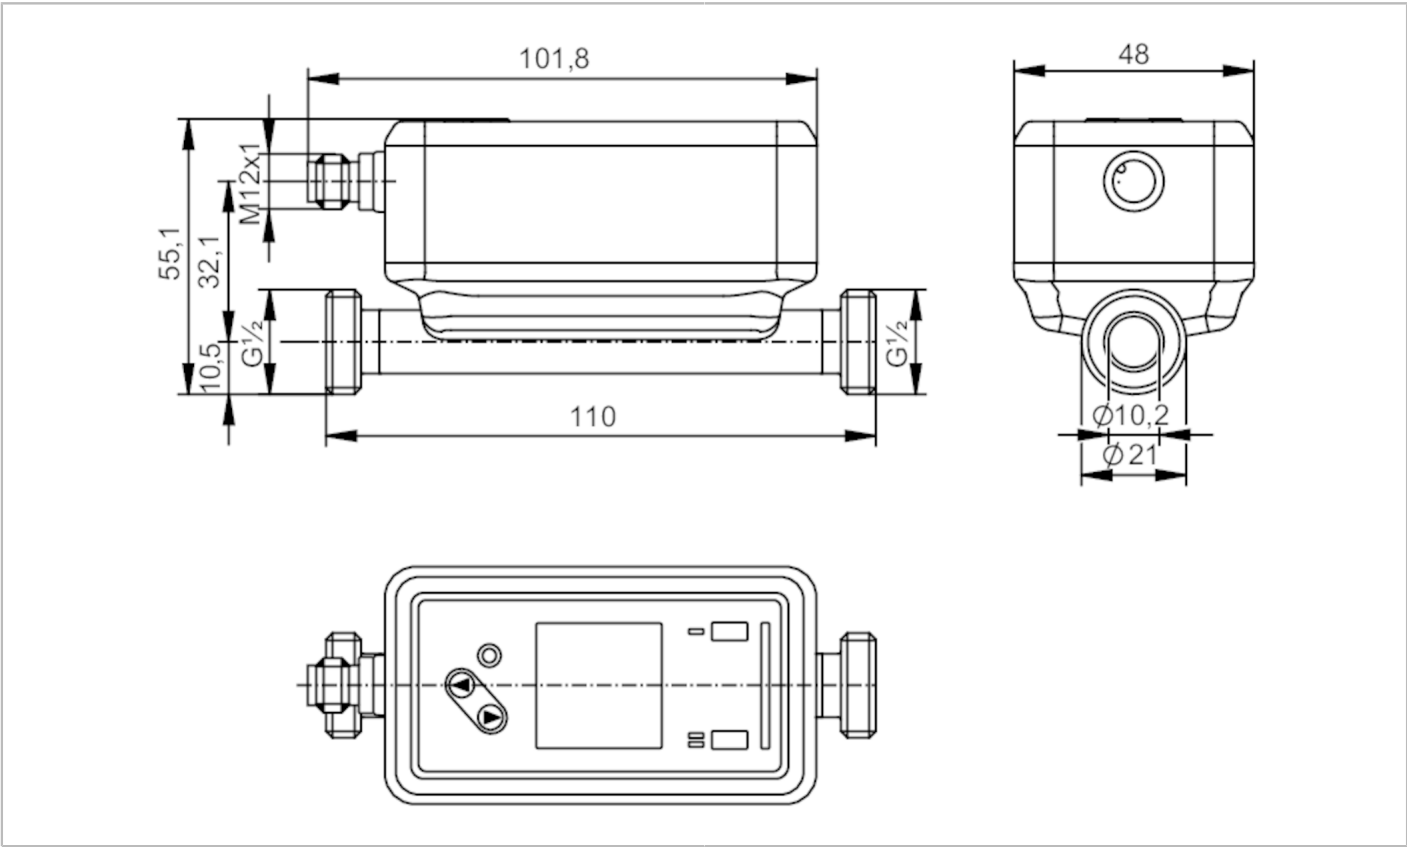

ACS    KTW/W270 Reg31

Product characteristics

Measuring range	0.5...65 l/min	30...3900 l/h	0.104...13.521 m/s	0.03...3.9 m³/h
Process connection	threaded connection G 1/2 external thread DN15			

Application

System	gold-plated contacts	
Media	ultra-pure water; water; water-based media; glycol solutions; oils; Coolants	
Note on media	water-based media: for media with >10 % additives, the repeatability is the only available value	
	low-viscosity oils with viscosity: 7...40 mm²/s (40 °C)	
	high-viscosity oils with viscosity: 30...68 mm²/s (40 °C)	
Medium temperature [°C]	-20...100	
Min. burst pressure	150 bar	15 MPa
Pressure rating	100 bar	10 MPa
Vacuum resistance [mbar]	-1000	

Electrical data

Operating voltage [V]	18...32 DC; (to SELV/PELV)			
Current consumption [mA]	< 75			
Protection class	III			
Reverse polarity protection	yes			
Power-on delay time [s]	5			
Measuring principle	ultrasonic			

SU6030



Ultrasonic flow meter

SUR12XFBFRKG/US

Inputs					
Inputs		counter reset			
Outputs					
Total number of outputs		2			
Output signal		switching signal; pulse signal; analog signal; IO-Link; frequency signal; diagnostic signal; totalizer switching signal			
Electrical design		PNP/NPN			
Output function		normally open / closed; (configurable)			
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	100			
Switching frequency DC	[Hz]	0...10000			
Analog current output	[mA]	4...20			
Max. load	[Ω]	500			
Pulse output		flow rate meter			
Short-circuit protection		yes			
Type of short-circuit protection		yes (non-latching)			
Overload protection		yes			
Measuring/setting range					
Measuring range		0.5...65 l/min	30...3900 l/h	0.104...13.521 m/s	0.03...3.9 m³/h
Display range		-78...78 l/min	-4680...4680 l/h	-16.225...16.225 m/s	-4.68...4.68 m³/h
Resolution		0.1 l/min	2 l/h	0.001 m/s	0.002 m³/h
Set point SP		0.9...65 l/min	52...3900 l/h	0.18...13.521 m/s	0.052...3.9 m³/h
Reset point rP		0.5...64.7 l/min	32...3880 l/h	0.111...13.452 m/s	0.032...3.88 m³/h
Analog start point ASP		-65...52 l/min	-3900...3120 l/h	-13.521...10.817 m/s	-3.9...3.12 m³/h
Analog end point AEP		-52...65 l/min	-3120...3900 l/h	-10.817...13.521 m/s	-3.12...3.9 m³/h
Low flow cut-off LFC		0.5...3.2 l/min	30...195 l/h	0.104...0.676 m/s	0.03...0.195 m³/h
Frequency end point, FEP		13...65 l/min	782...3900 l/h	2.713...13.521 m/s	0.782...3.9 m³/h
Frequency at the end point FRP	[Hz]	1...10000			
Volumetric flow quantity monitoring					
Pulse length	[s]	0.002...2			
Pulse value		0.02...99990000 l			
Temperature monitoring					
Measuring range	[°C]	-20...100			
Display range	[°C]	-44...124			
Resolution	[°C]	0.1			
Set point SP	[°C]	-19.6...100			
Reset point rP	[°C]	-20...99.6			
Analog start point	[°C]	-20...76			
Analog end point	[°C]	4...100			
Frequency start point, FSP	[°C]	-20...76			
Frequency end point, FEP	[°C]	4...100			

SU6030



Ultrasonic flow meter

SUR12XFBFRKG/US

Frequency at the end point FRP	[Hz]	1...10000
--------------------------------	------	-----------

Accuracy / deviations

Flow monitoring		
Accuracy (in the measuring range)	glycol solutions (35%)	±(5,0 % MW + 0,5 % MEW)
	high-viscosity oils with viscosity 46mm ² /s (40°C)	±(5,0 % MW + 1,0 % MEW)
	low-viscosity oils with viscosity 10mm ² /s (40°C)	±(5,0 % MW + 1,0 % MEW)
	water	± (2,0 % MW + 0,5 % MEW)
Repeatability		± 0,2 % MEW

Temperature monitoring		
Accuracy	[K]	± 2,5 (Q > 5 % MEW)
Temperature coefficient [% of the span / 10 K]		0,2

Reaction times

Flow monitoring		
Response time	[s]	< 0.25; (dAP = 0, T09)
Damping process value dAP	[s]	0...5
Temperature monitoring		
Dynamic response T05 / T09	[s]	5,7 / 86

Software / programming

Diagnostic functions	direction of flow detection; signal quality
----------------------	---

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1.3	
SDCI standard	IEC 61131-9: 2013-07	
Profiles	BLOB	Binary Large Object transfer
	Common - I&D	Identification and Diagnosis
Required master port class	A	
Process data analog	3	
Process data binary	2	
Min. process cycle time	[ms]	9.6
IO-Link process data (cyclical)	Function	bit length
	totalizer	32
	Flow monitoring	32
	Temperature monitoring	32
	status	4
	Output 1	1
	Output 2	1
	Type of operation	DeviceID
Supported DeviceIDs	default	1754

Operating conditions

Ambient temperature	[°C]	-20...60
---------------------	------	----------

SU6030



Ultrasonic flow meter

SUR12XFBFRKG/US

Storage temperature	[°C]	-25...80
Protection		IP 65; IP 67

Tests / approvals

EMC	DIN 61326-1:2021	
Shock resistance	DIN IEC 68-2-27	20 g (11ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000Hz)
MTTF	[years]	160
UL approval	UL approval number	I034
Pressure equipment directive		can be used for group 2 fluids; group 1 fluids on request

Mechanical data

Weight	[g]	485.5
Housing		rectangular
Type of mounting		inlet pipe length 5xDN; outlet pipe length 1xDN
Dimensions	[mm]	110 x 48 x 55.1
Material		housing: stainless steel (1.4404 / 316L); Display: PFA; sealing Display: FKM; connector: PBT
Materials (wetted parts)		Pipe section: stainless steel (1.4404 / 316L); Process connection sealing: NBR fiber-reinforced Gasket
Process connection		threaded connection G 1/2 external thread DN15
Surface characteristics Ra/Rz of the wetted parts		Ra < 1.25 µm

Displays / operating elements

Display		Color display 1,44", 128 x 128 pixels
	Switching function	2 x LED, yellow
	diagnosis	1 x LED, three-color
Display unit		l/min; l/h; m³/h; m/s

Accessories

Items supplied	Gasket 2, Centellen
	package insert

Remarks

Remarks	MW = Measured value
	MEW = Final value of the measuring range
	pulse and totalizer signal are only available for one of the two outputs
	the accuracy indications are adhered to over the entire application area
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



SU6030



Ultrasonic flow meter

SUR12XFBFRKG/US

Connection



- OUT1/IO-Link:
- OUT2/InD:
- Switching output Volumetric flow quantity monitoring
 - Switching output Temperature monitoring
 - Pulse output quantity meter
 - Frequency output Volumetric flow quantity monitoring
 - Frequency output Temperature monitoring
 - Diagnostic output direction of flow detection / signal quality
 - signal output Preset counter
 - Switching output Volumetric flow quantity monitoring
 - Switching output Temperature monitoring
 - Pulse output quantity meter
 - analog output flow
 - analog output temperature
 - Diagnostic output direction of flow detection / signal quality
 - signal output Preset counter
 - Input counter reset


Colors to DIN EN 60947-5-2

Core colors


- BK= black
- BN= brown
- BU= blue
- WH= white

Diagrams and graphs

Note on pressure loss



derating ambient temperature



- 1 Ambient temperature
- 2 Medium temperature